





MOLT XGSPON 8P


KEY HIGHLIGHTS:

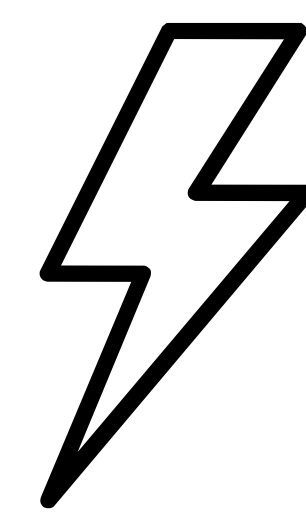


8x
PON ports

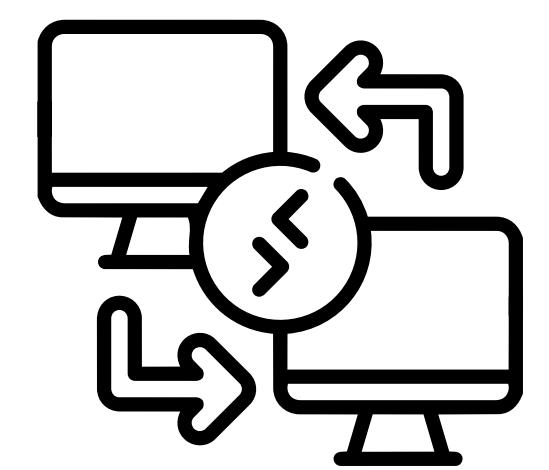

OMCI -based
remote management

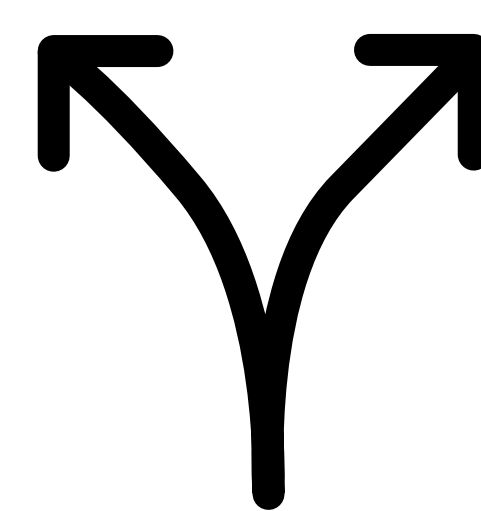


Combo PON ports
supporting GPON and
XG(S)PON operation

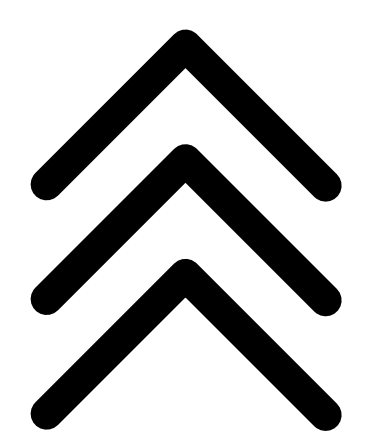

2x
100GE QSFP28
uplink ports

The **Niurix MOLT XGSPON 8P** is an advanced fiber access platform supporting **GPON and XG(S)PON** within a single system. It is designed for properties preparing for higher bandwidth demands while maintaining continuity with existing GPON infrastructure.

The platform enables a smooth transition from GPON to next-generation PON technologies, allowing enterprises to evolve their fiber networks without redesigning the core architecture.

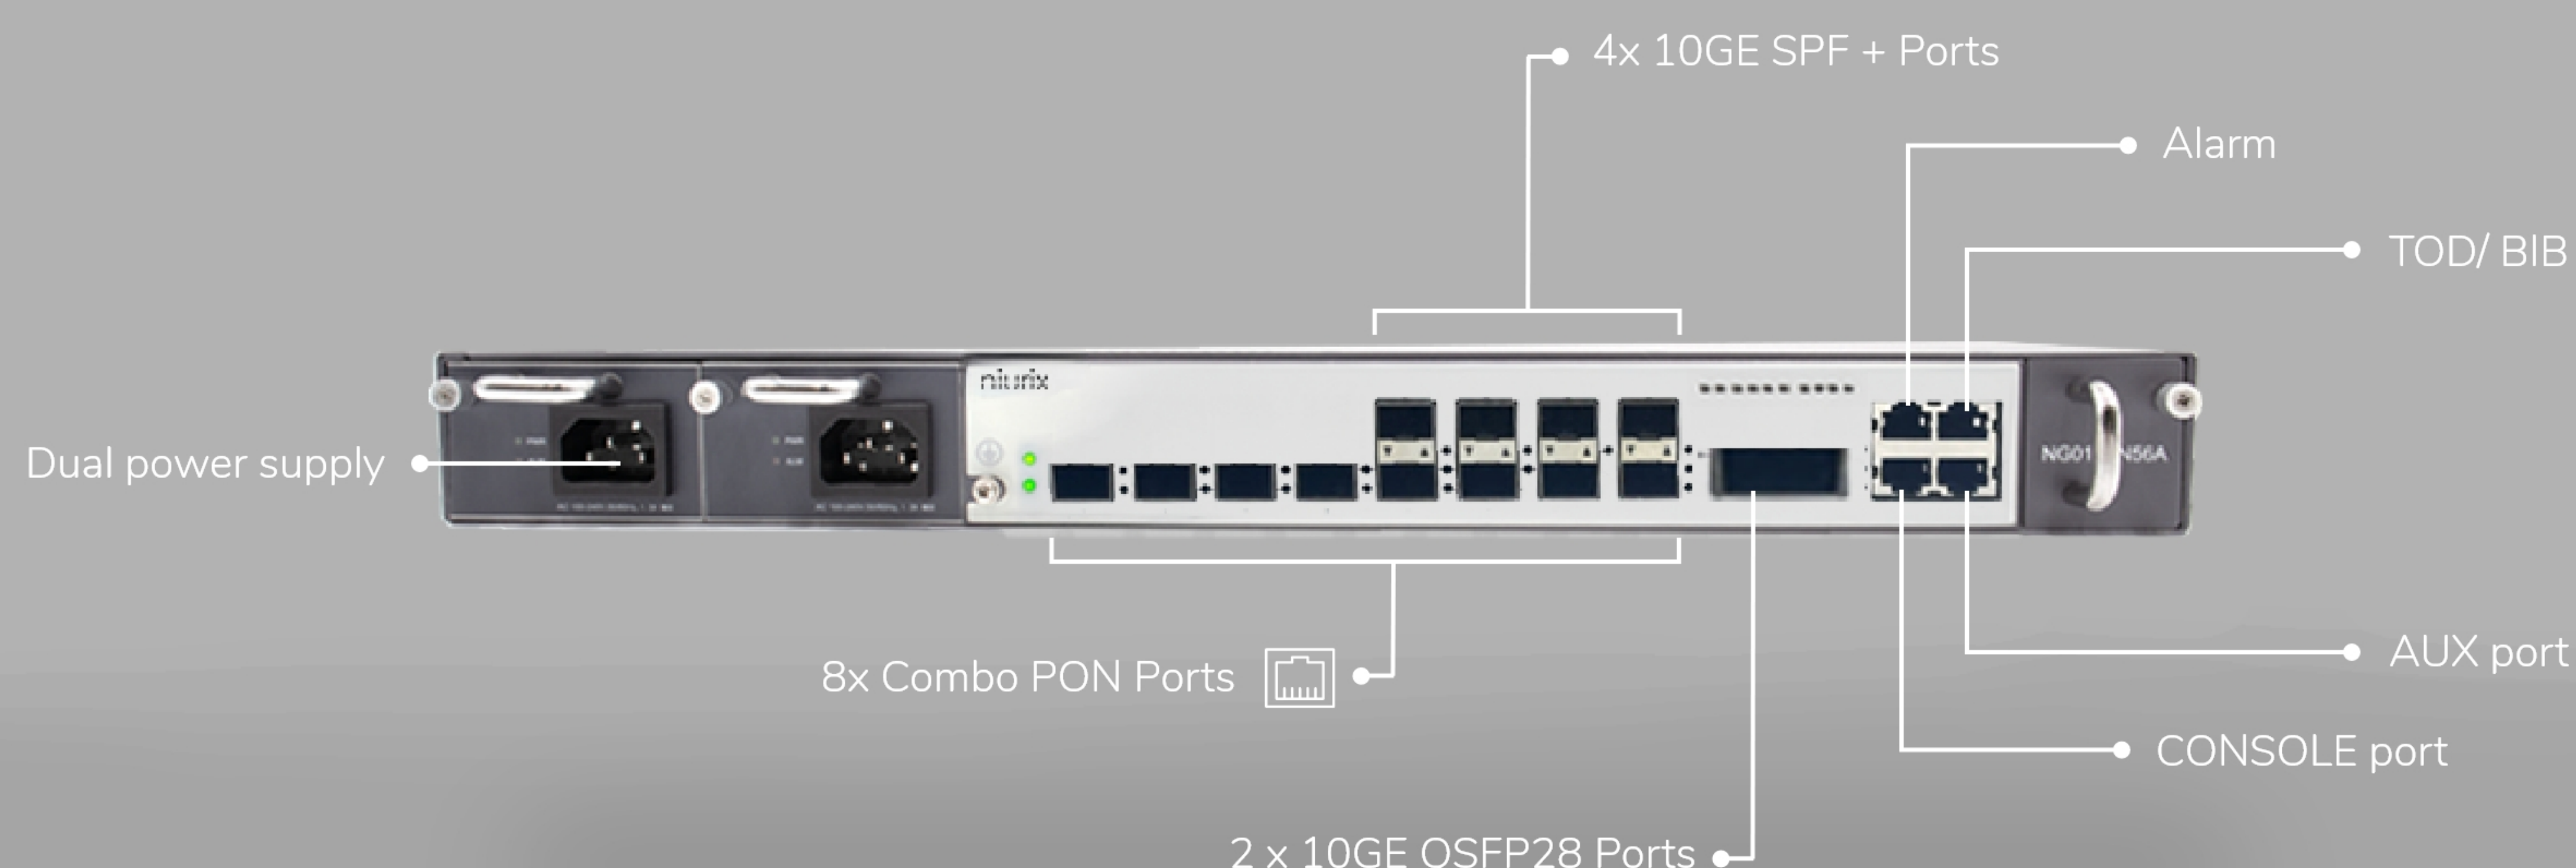

Product Feature and Specifications

GENERAL/PHYSICAL FEATURES:

DIMENSIONS

L = 440mm W=270mm D=44mm

WEIGHT

6.5 kg

WORKING TEMPERATURE

-14 ~ 131° F (-10 ~ 55° C)

STORAGE TEMPERATURE

-40 ~ 158° F (-40 ~ 70° C)

RELATIVE HUMIDITY

10% - 90%, non - condensing

POWER SUPPLY & CONSUMPTION

AC: 100 V AC ~ 240 V AC

DC: -36 V DC ~ -75 V DC

Power Consumption : 90W

INTERFACE SPECS:

SWITCH CAPACITY

720 Gbps

FORWARDING RATE

536 Mpps

PORTS

8x Combo PON ports (GPON / XGSPON)

4x 10GE/ GE SFP + ports

2x 100G QSFP28 ports

STANDARD

Conform to ITU-TG.984/T G.987/G.988
standard

PON FEATURES:

- Support N1/N2/E2 XG-PON or XGS-PON optical module
- Support N1/B+, N2/C+, E2/D Combo optical modules
- Support B+/C+/C++ GPON optical module
- SN / SN+Password ONU authentication, FEC
- ONU Digital Diagnostic Monitor
- Rogue ONU Detection

PON Tx POWER

3~7dBm (C+), 4~8dBm (N2a)

PON Rx SENSITIVITY

-30 dBm (C+), -29.5 dBm (N2a)

SPLIT RATIO

1:128

BANDWIDTH

GPON: 1.25Gbps (Up), 2.5Gbps (Down)

XGPON: 2.5Gbps (Up), 10Gbps (Down)

XGSPON: 10Gbps (Up), 10Gbps (Down)

WAVELENGTH

GPON: 1310 nm (Up), 1490 nm (Down)

XGPON: 1270 nm (Up), 1577 nm (Down)

STANDARD COMPLIANT:

- ITU-T G.984/G.987/G.988/G.9807 compliant
- IEEE 802.1D, Spanning Tree
IEEE 802.1Q, VLAN | IEEE 802.1w, RSTP
IEEE 802.3ad , LACP | Ethernet - II

Product Feature and Specifications

L1 FEATURES:

- Line-speed switch/forwarding
- 64K MAC address table
- Port-based VLAN, Protocol-based VLAN, 802.1q VLAN
- LACP/LAG • Port Mirror
- STP/RSTP/MSTP • Flow Control
- Broadcast/DLF/Unknown Multicast storm control
- ERPS Ethernet ring network protection protocol
- Loopback-detection port loopback detection is supported

PORT CONTROL

- Bi-directional bandwidth control
- Port storm suppression
- 9K Jumbo super long frame forwarding

PORT AGGREGATION

- Static link aggregation
- Dynamic LACP
- Each aggregation group supports a maximum of 8 ports

MULTICAST:

- IGMPv1/v2 snooping
- MLDv1 snooping
- IGMP snooping with Proxy
- Fast Leave
- 1k Multicast group supported

L2 FEATURES:

- Switch Virtual Interface (SVI): IPv4/IPv6
- Static Route
- Static/Dynamic ARP
- ICMP/Traceroute
- DHCP Server / DHCP Relay: IPv4/IPv6
- Switch Virtual Interface (SVI): IPv4/IPv6
- Static Route
- Static/Dynamic ARP
- ICMP/Traceroute
- DHCP Server / DHCP Relay: IPv4/IPv6

PORT CONTROL

- Standard and extended ACL
- Time range ACL policy
- Provide flow classification and flow definition based on IP packet header information such as source/destination MAC address, VLAN, 802.1p, ToS, DSCP, source/destination IP address, L4 port number, protocol type, etc

L3 ROUTING:

- Support ARP learning and aging
- VLAN Layer 3 interfaces and configuring static IPv4/IPvvó
- Support static route configuration
- Support RIP/OSPF protocol function
- Support VRRP protocol function

Product Feature and Specifications

QOS:

- Flow speed limit function based on custom business flow
- Packet mirroring and packet redirection based on custom service flows
- Support priority marking based on custom service flow, support 802.1P, DSCP priority Remark capability
- Port-based priority scheduling function, support queue scheduling algorithms such as SP/WRR/SP+WRR

SAFETY & SECURITY:

- User hierarchical management and password protection
- IEEE 802.1X authentication/centralized MAC address authentication
- Radius&TACACS+ authentication
- MAC address learning number limit, support black hole MAC function
- SSH 2.0, providing a secure encrypted channel for user login
- SNMP v3 encrypted management
- Port isolation, hardware isolation of packets between ports
- Broadcast packet rate suppression
- IP Source Guard to automatically create IP+MAC+port+VLAN binding table, and support manual binding table items

SAFETY & SECURITY:

- ARP flood attack automatic suppression and ARP spoofing protection
- DHCP Option82 and PPPoE+
- Prevention of various DOS attacks and virus attacks against the CPU on the control layer

SYSTEM MANAGEMENT

- Console/Telnet/SSH2.0 command line configuration
- WEB browser configuration management
- FTP, TFTP file upload and download management
- SNMP V1/V2/V3
- RMON
- SNTP clock
- System work log
- LLDP Neighbor Discovery Protocol
- 802.3ah Ethernet OAM
- RFC 3164 Syslog function
- Ping and Traceroute