





Niurix T2001

KEY HIGHLIGHTS:

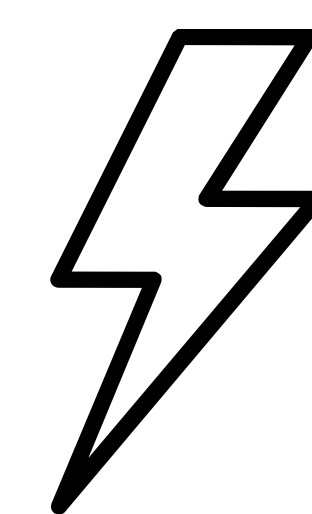

XGSPON

Data Support

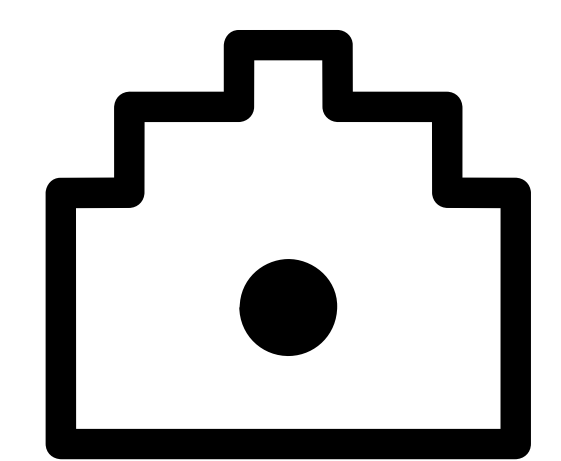


10GE

Data Support



1X


Voice Port

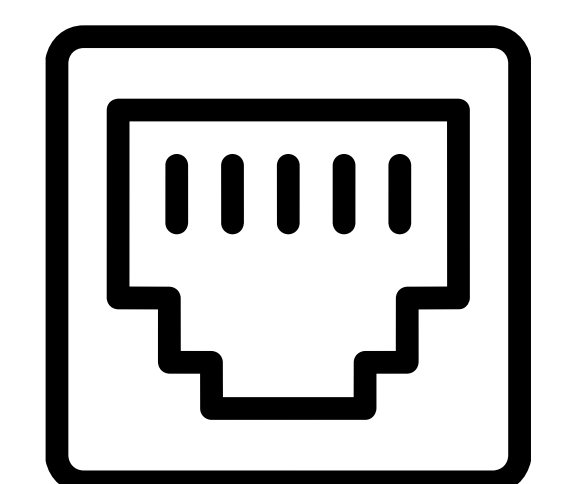

1X

GE Port

The **Niurix T2001** is a triple-play fiber endpoint that delivers internet, voice, and TV services over a single fiber connection. Designed for hospitality and enterprise environments, it supports clean in-room installations and consistent service delivery as part of the Niurix GPON architecture.

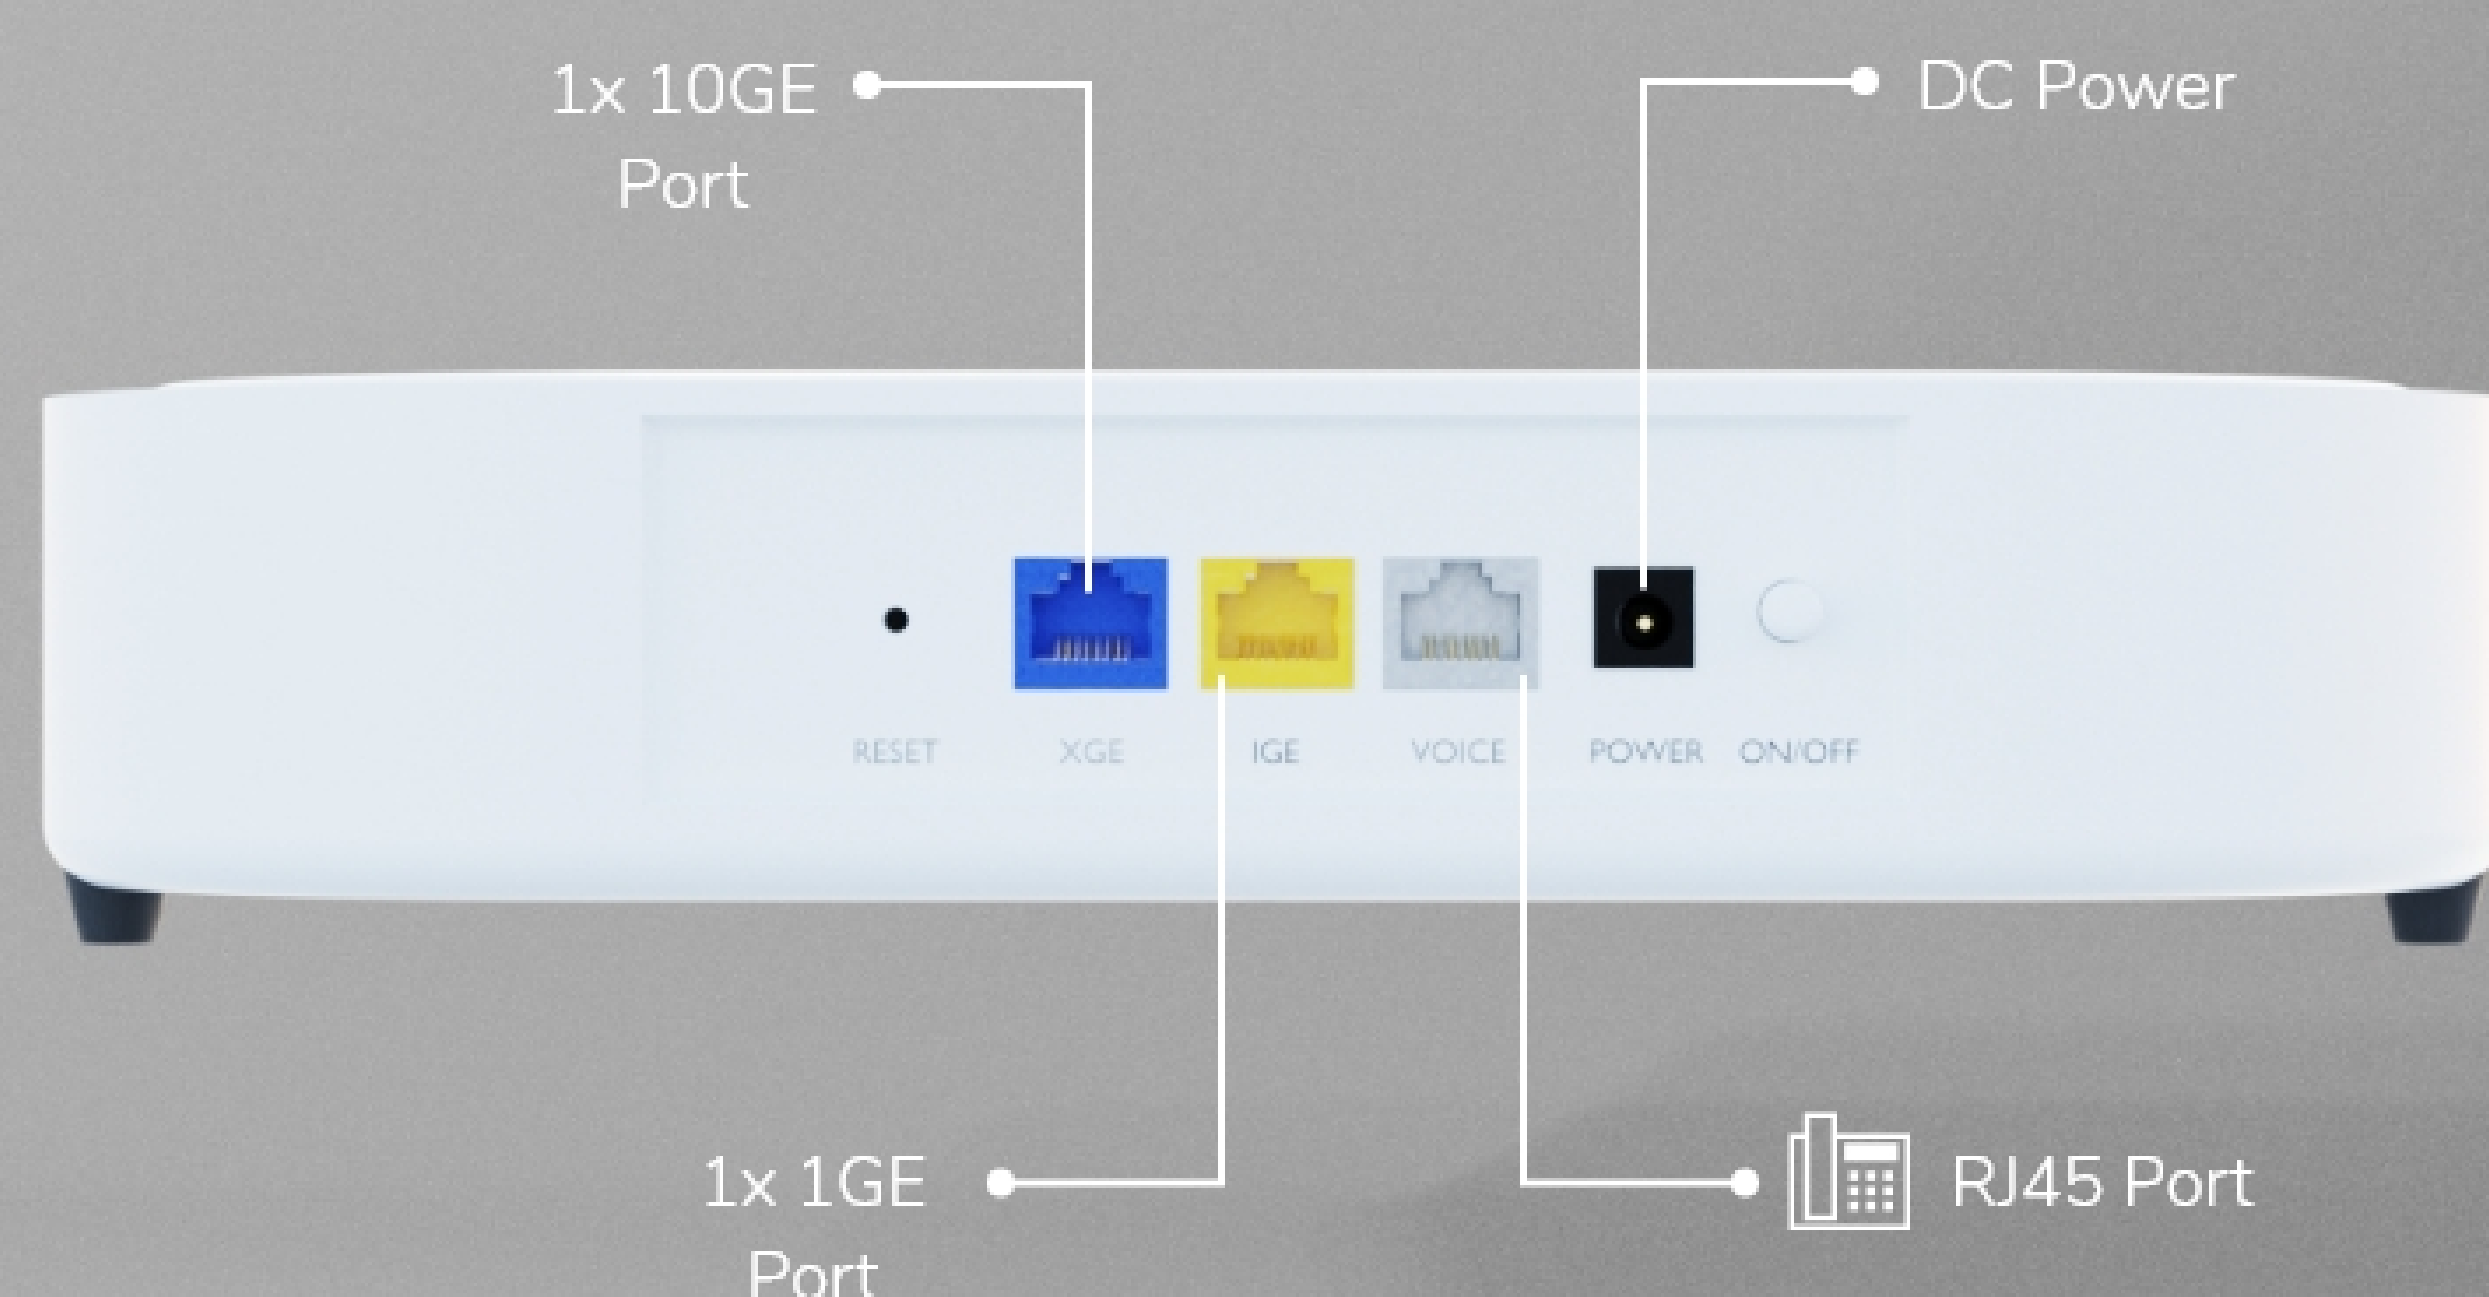

Product Feature and Specifications

GENERAL/PHYSICAL FEATURES:

DIMENSIONS

L = 156mm W=156mm H=38mm

WEIGHT

Less than 500g

POWER SUPPLY

12 VDC , 1A

OPERATING TEMPERATURE

32 - 122° F (0 - 50° C)

STORAGE TEMPERATURE

32 - 158° F (0 - 70° C)

RELATIVE HUMIDITY

10 - 90 %, non - condensing

POWER OVER INTERNET (802.3bt)

Upto 90W

USER INTERFACES:

XGSPON PORT

1 x

10 GE PORT

1 x

GE PORT

1 x

VOICE PORT

1 x

QOS:

- WMM
- Band width Control

STANDARDS:

- Compliant with ITU -TG.984. X
ITU -TG.9807.X

SECURITY:

- DoS , SPI Firewall
- IP Address Filter/MAC Address Filter/
Domain Filter
- IP and MAC Address Binding

MANAGEMENT:

- Local management control
- Hostlist
- Access schedule
- Remote Management