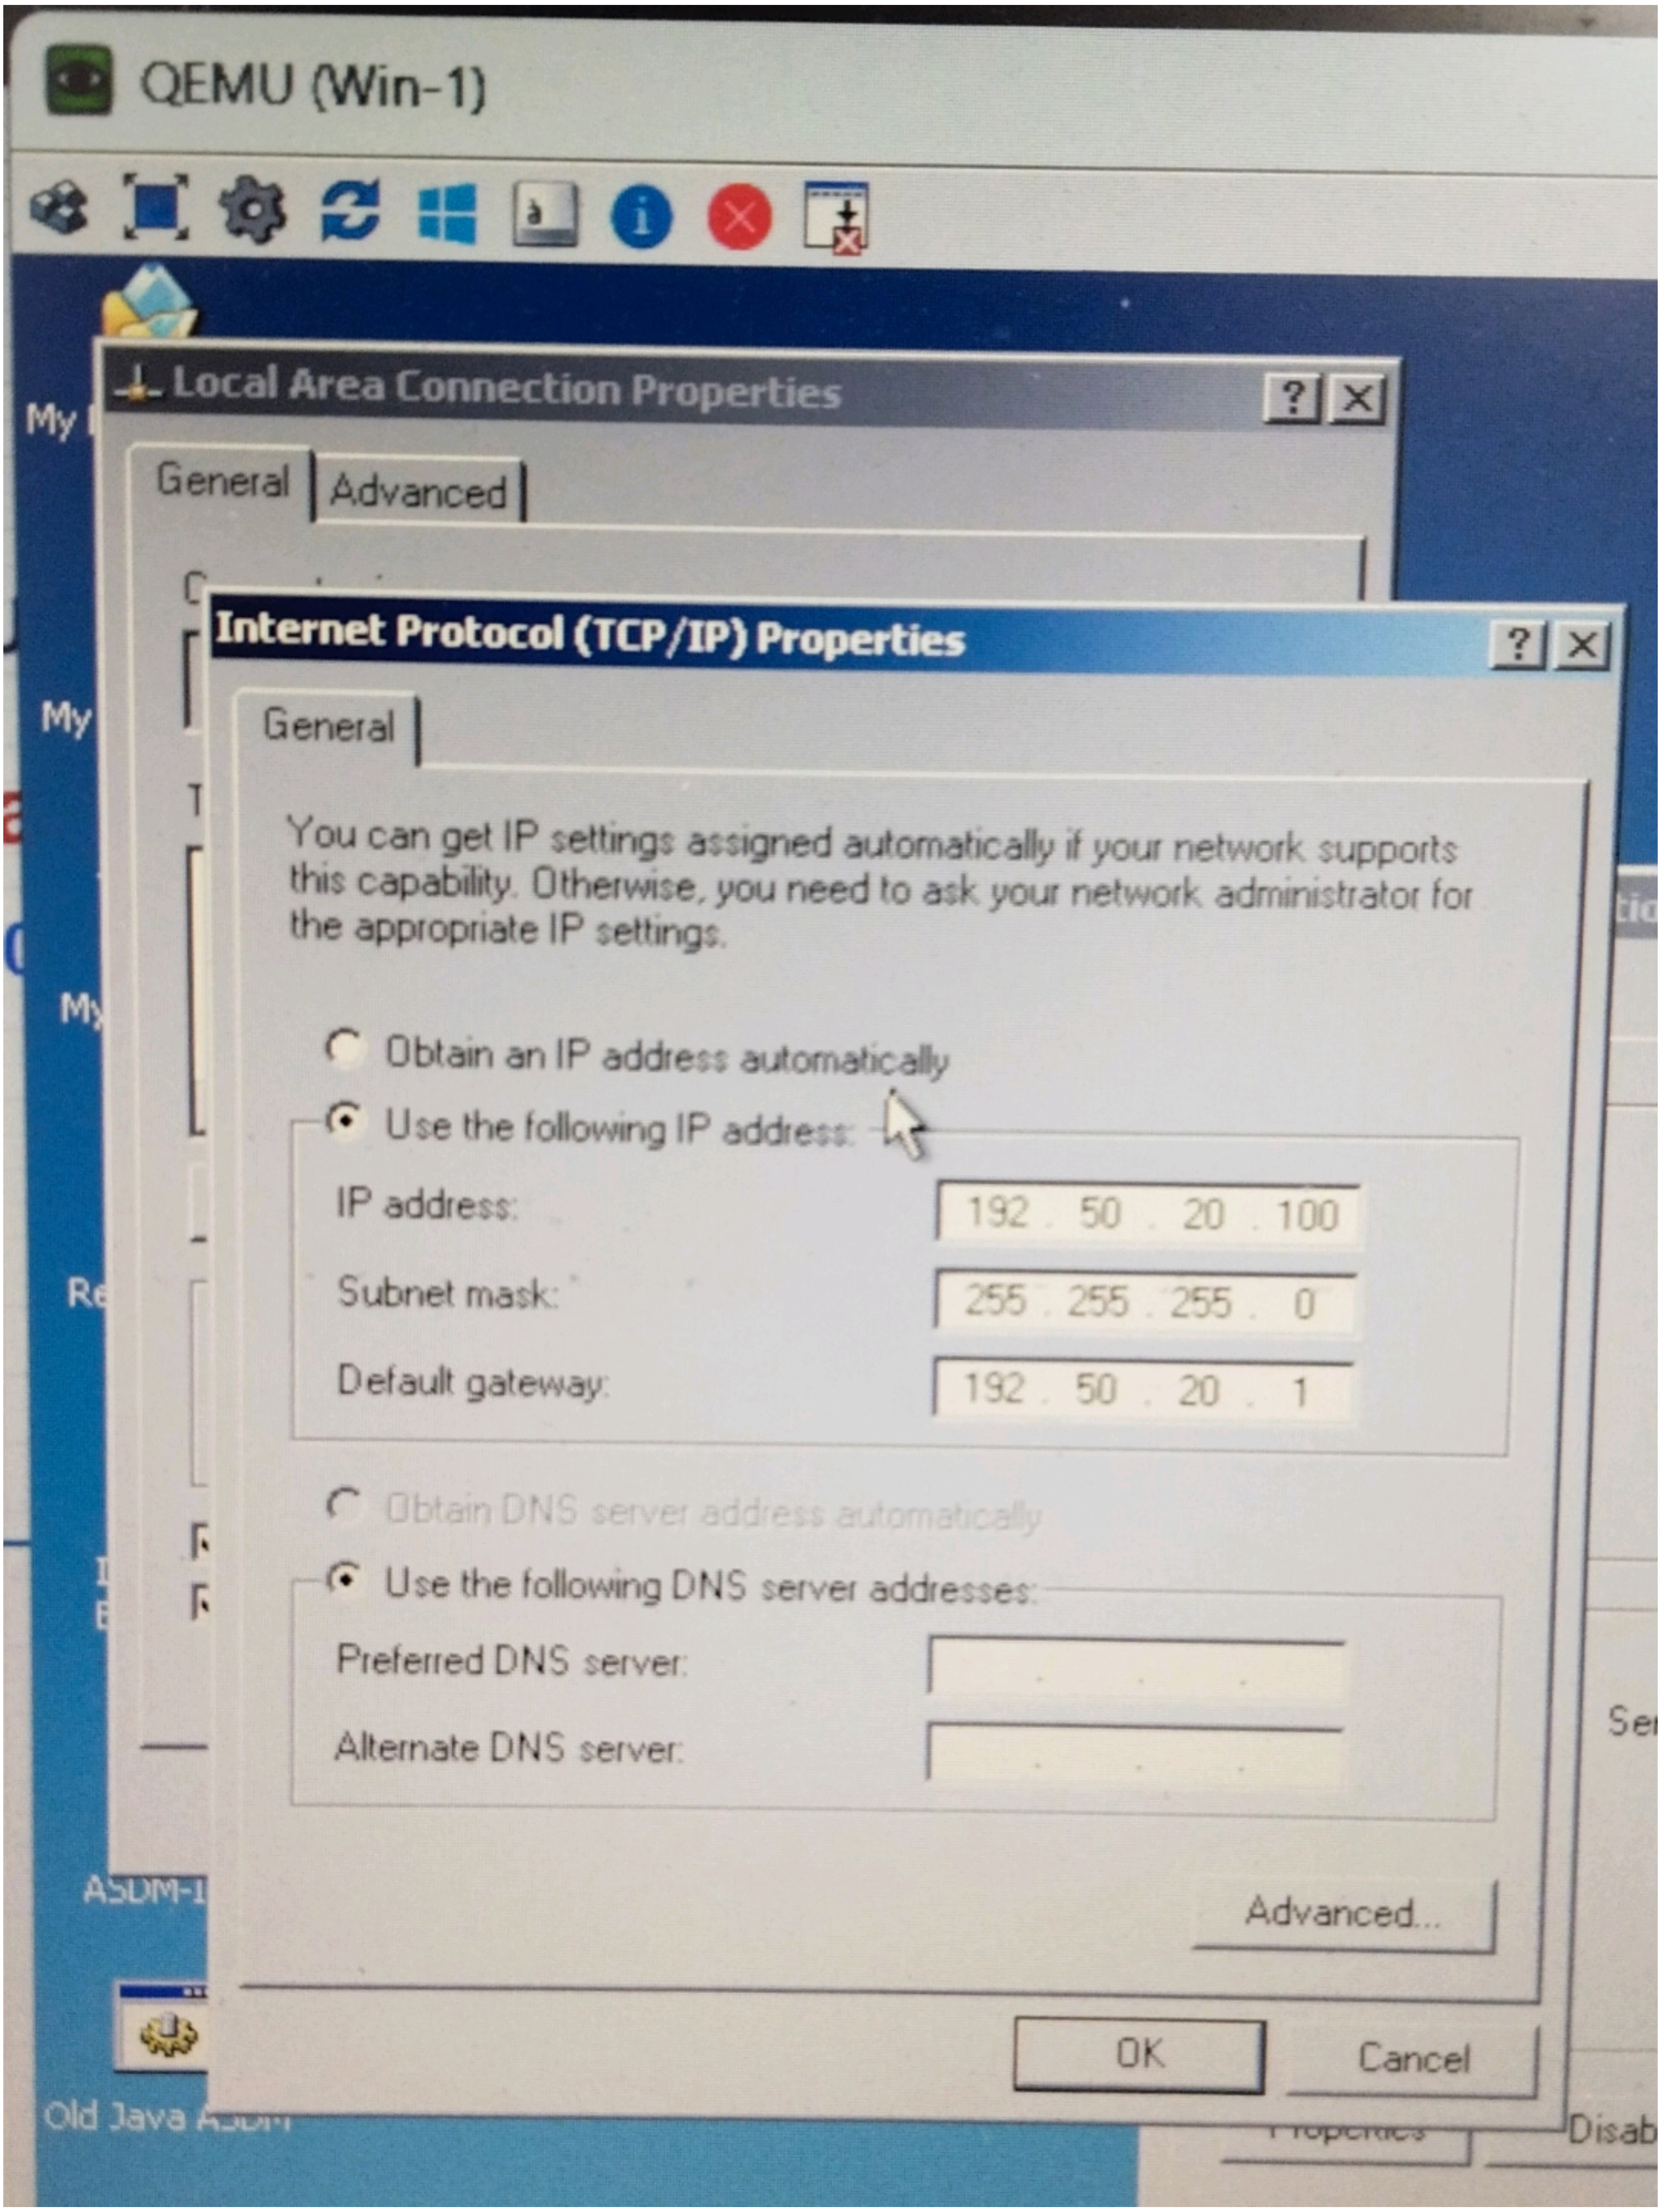
QEMU (Win-1)
Local Area Connection Properties
General
Advanced
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address:
192 . 50 . 20 . 100
Subnet mask:
255 . 255 . 255 . 0
Default gateway:
192 . 50 . 20 . 1
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel
Old Java ASDM

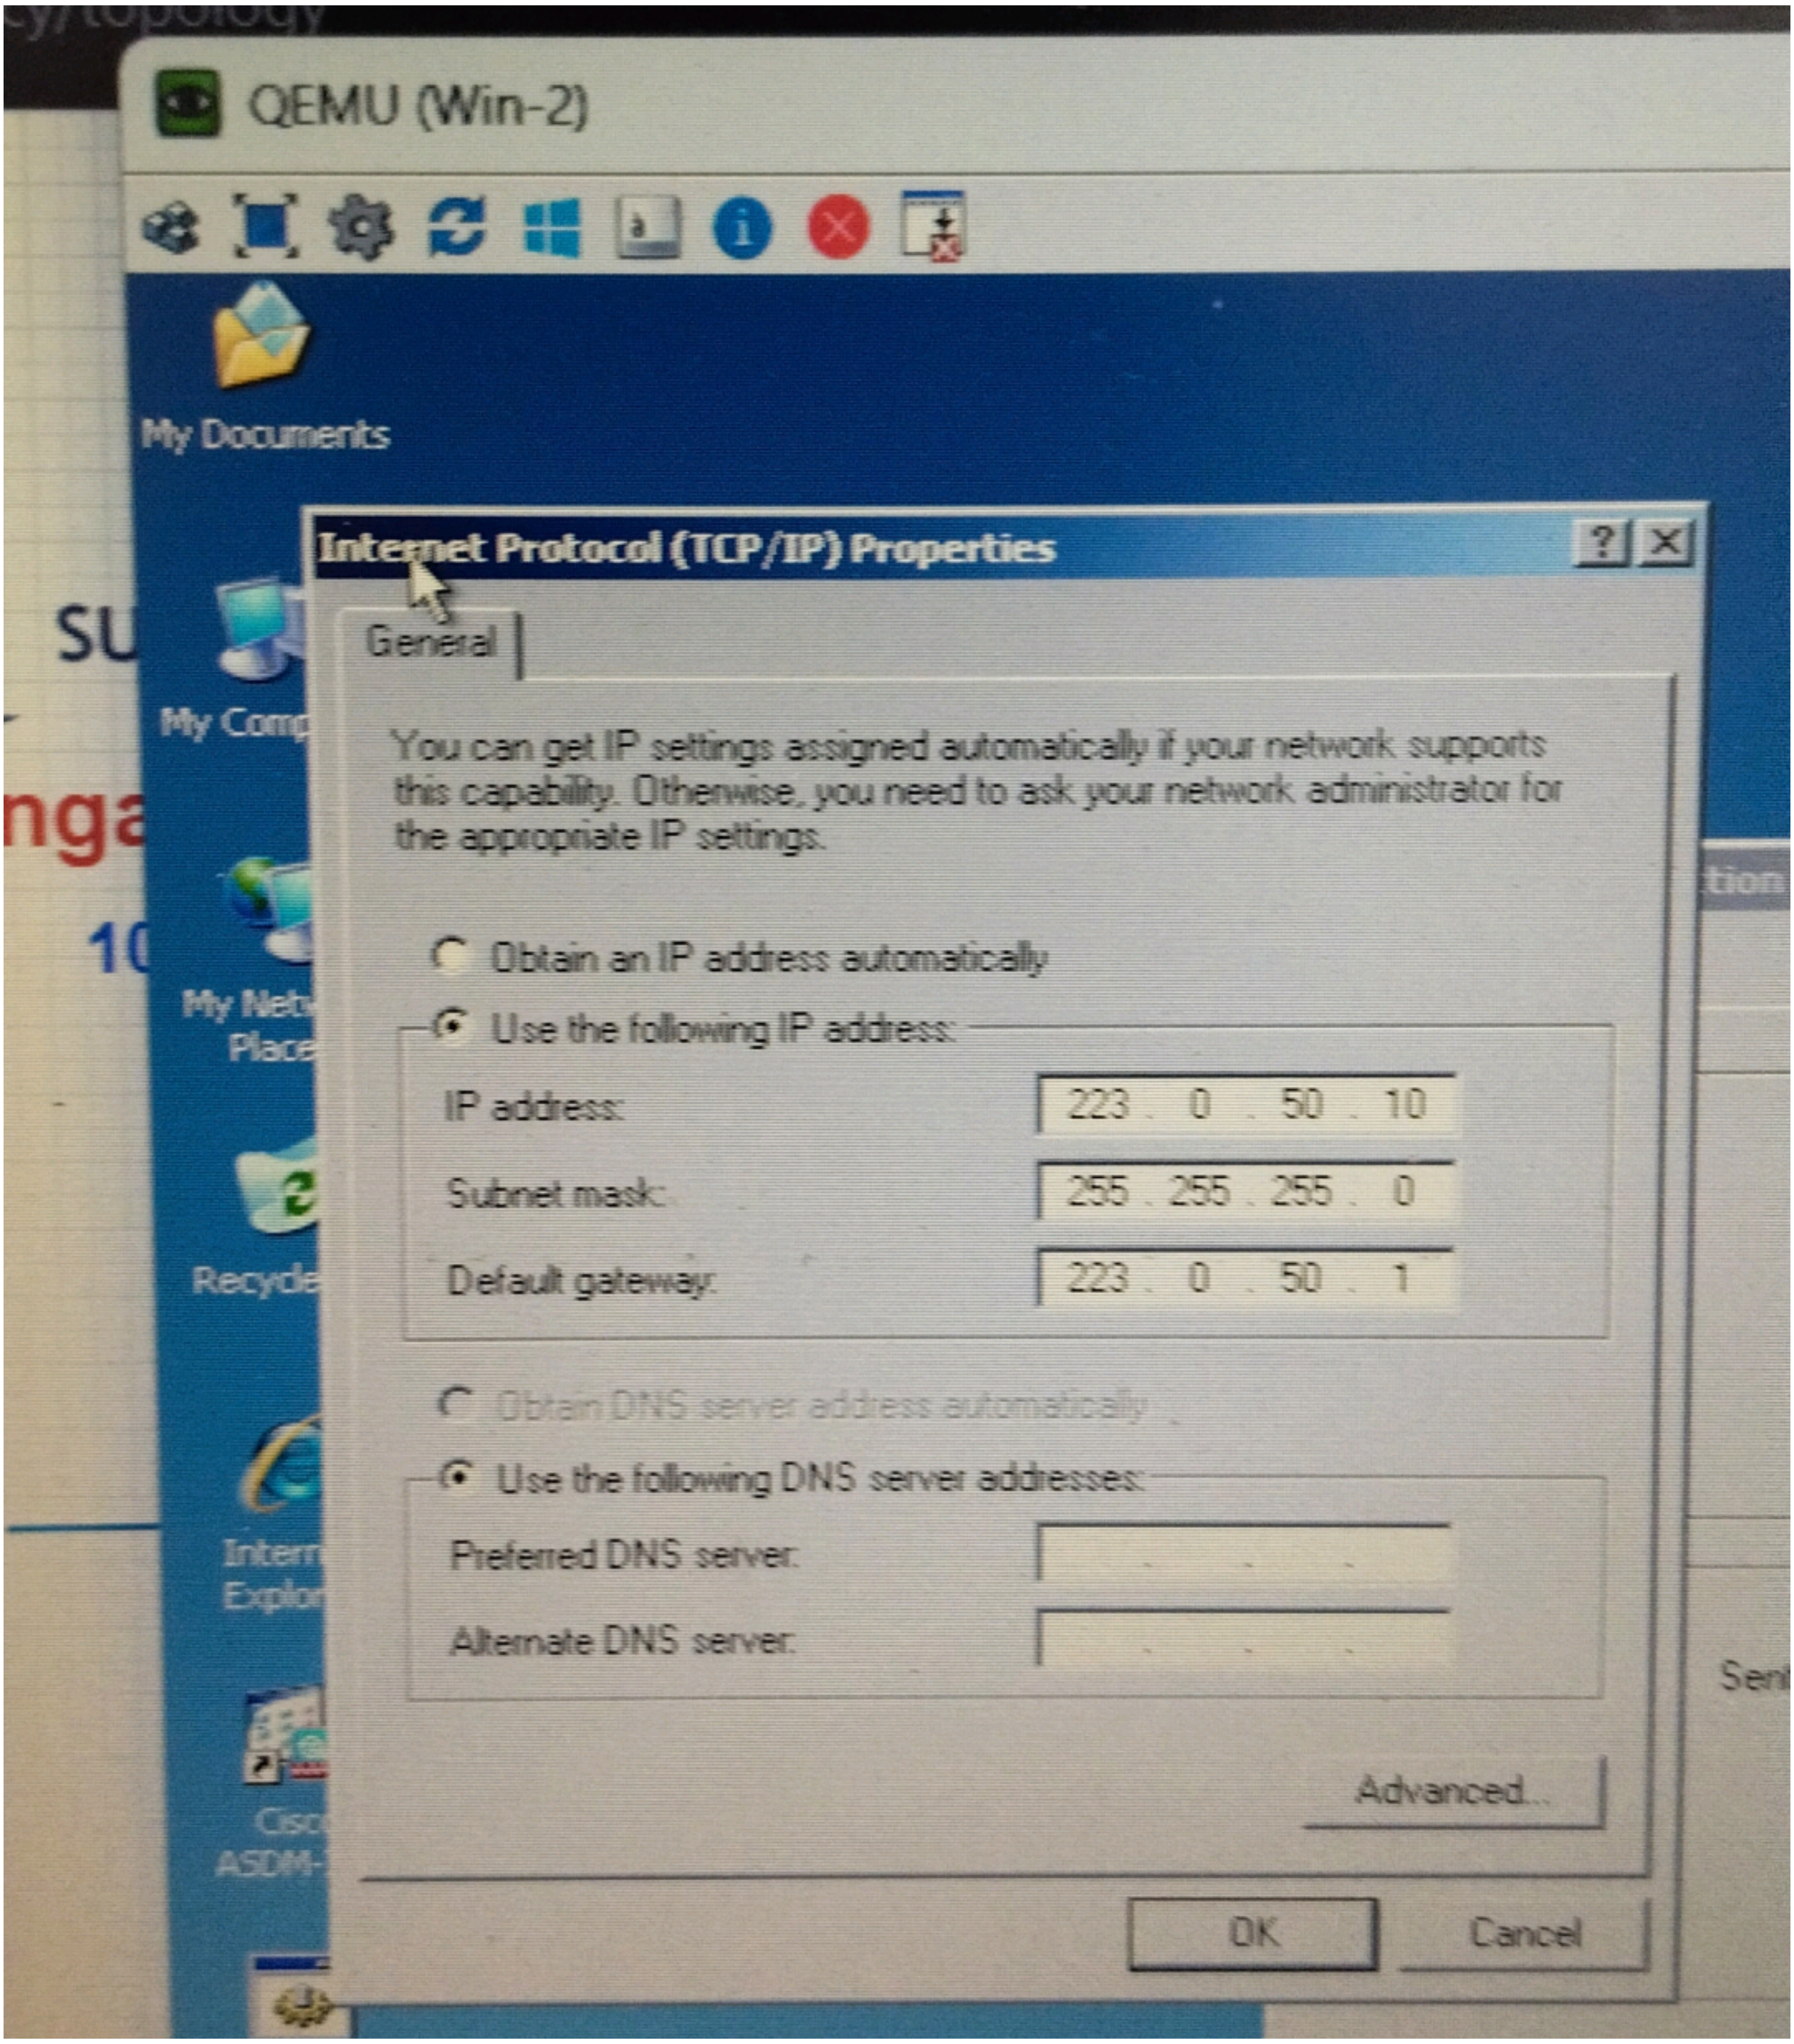
QEMU (Win-2)
My Documents
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 223 . 0 . 50 . 10
Subnet mask: 255 . 255 . 255 . 0
Default gateway: 223 . 0 . 50 . 1
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel

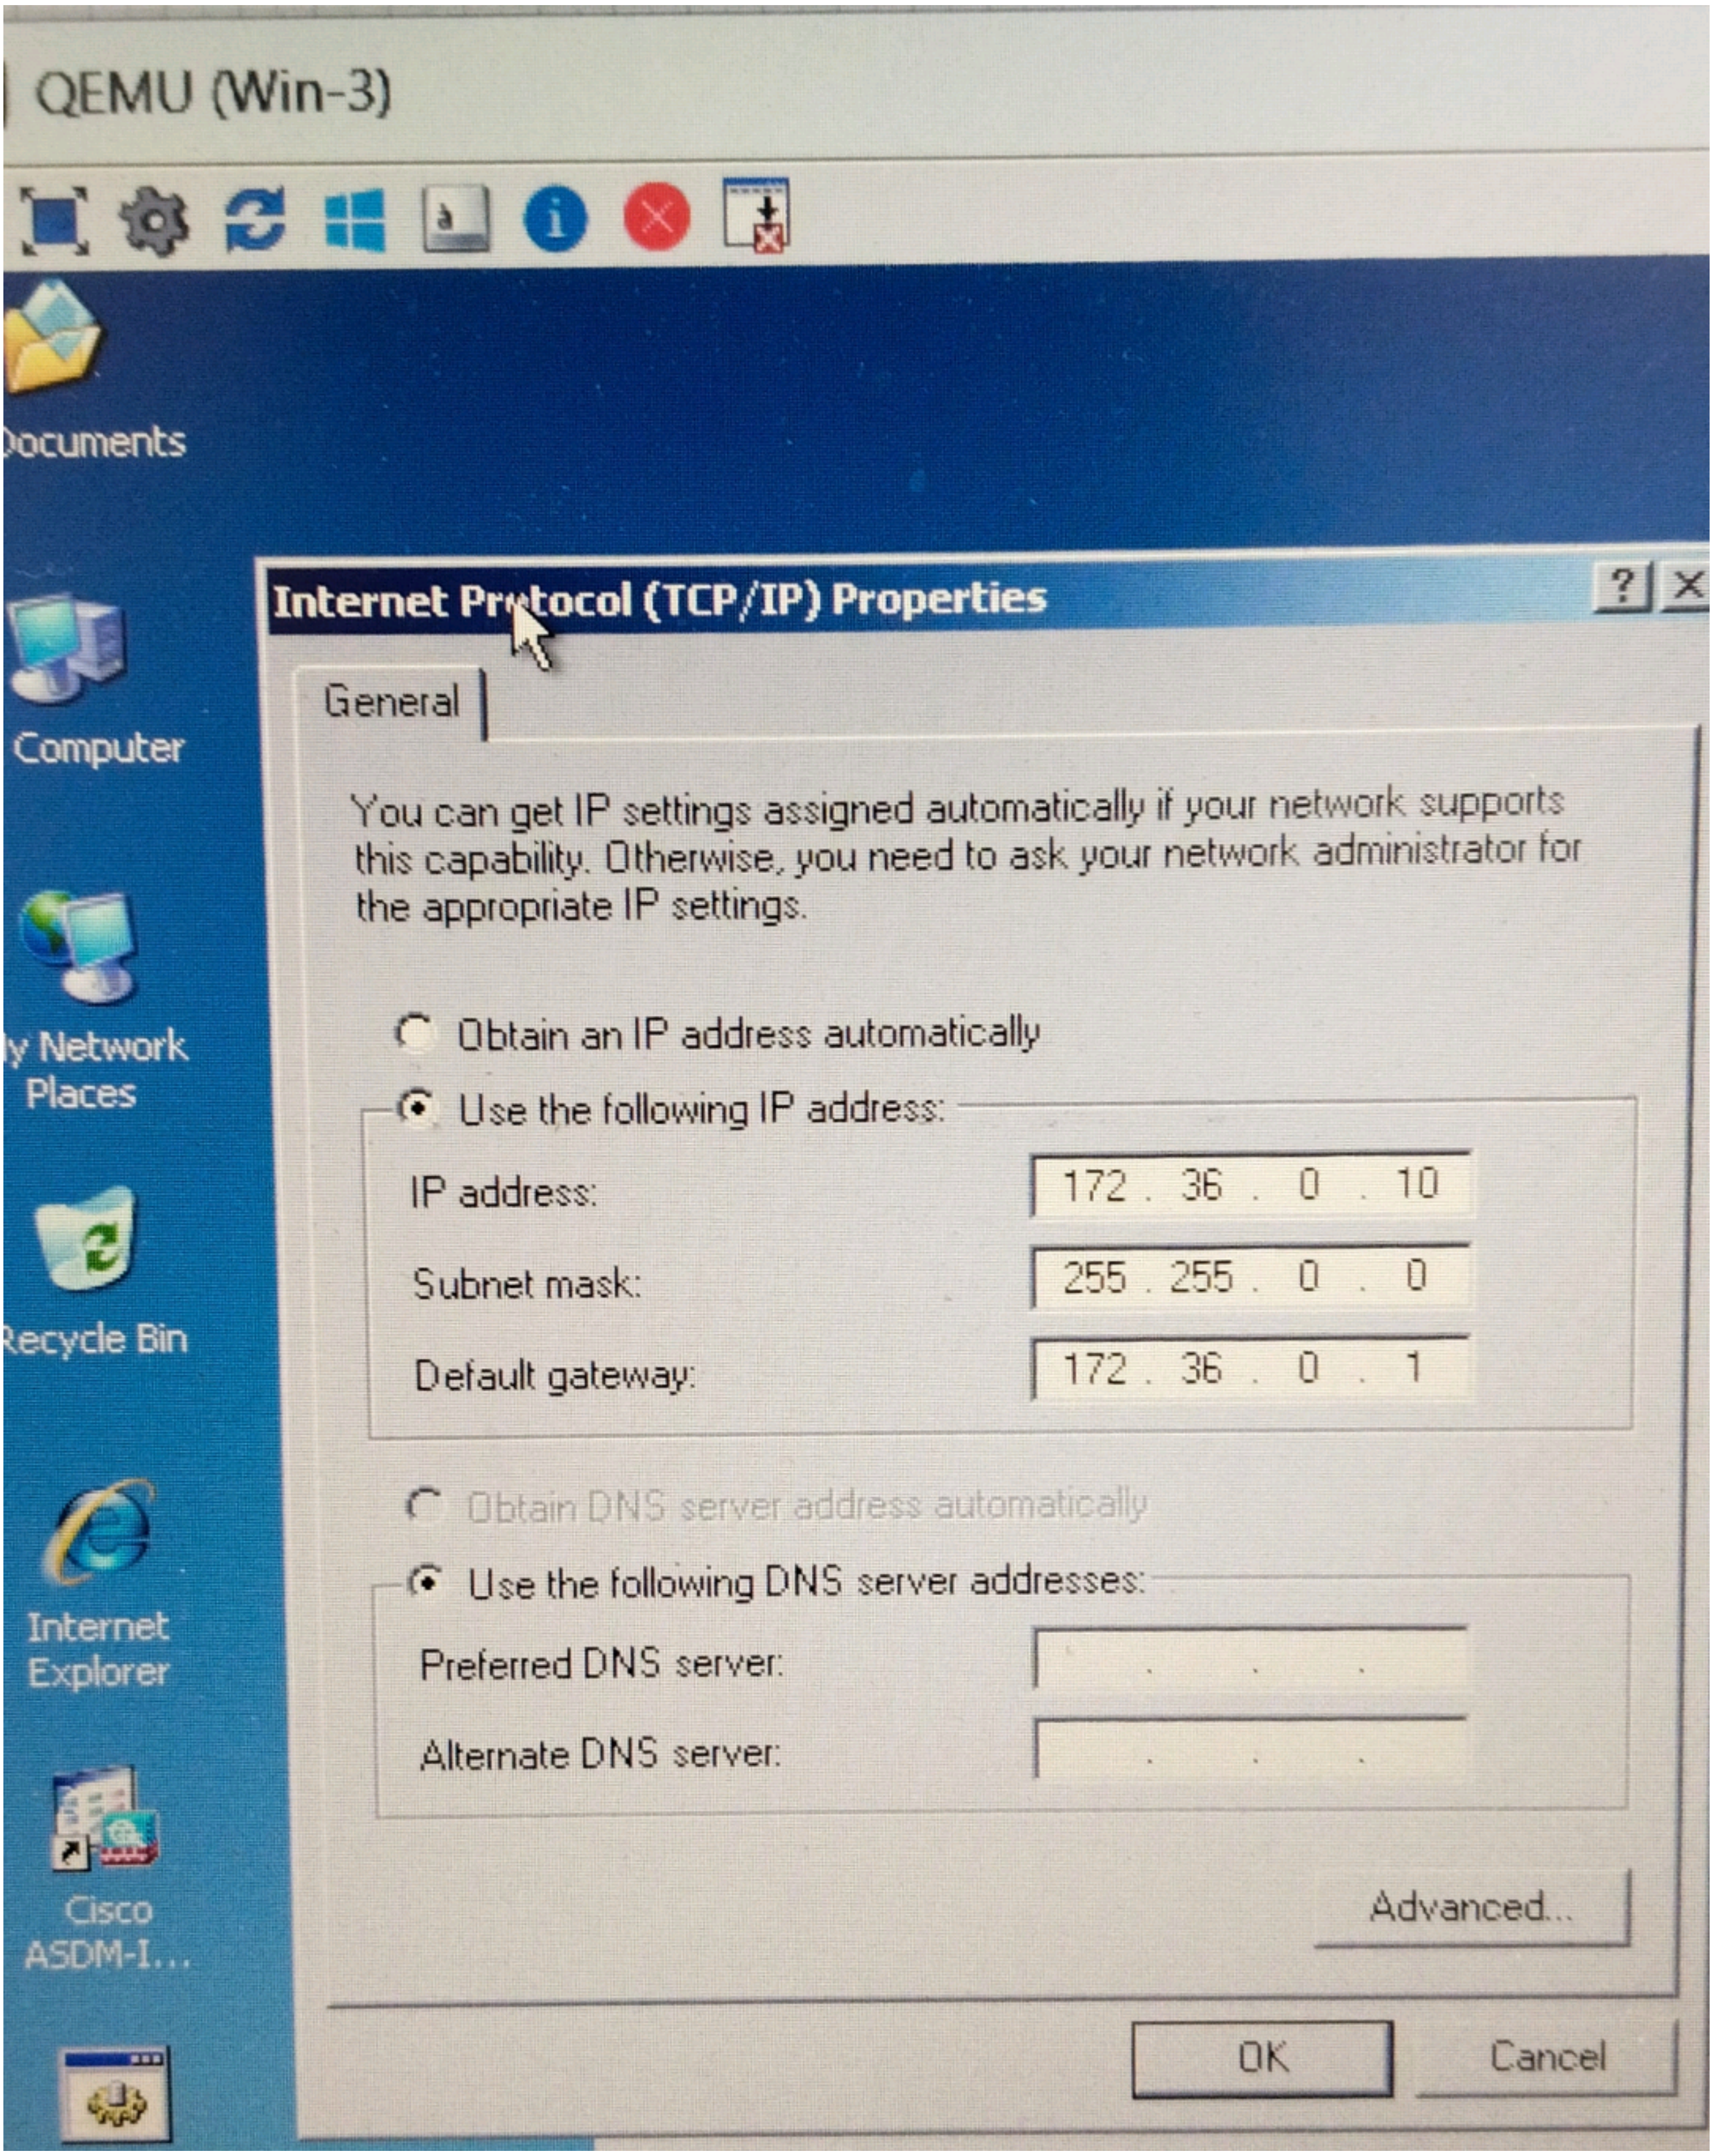
QEMU (Win-3)
Documents
Computer
My Network Places
Recycle Bin
Internet Explorer
Cisco ASDM-I...
Internet Protocol (TCP/IP) Properties
General
You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.
Obtain an IP address automatically
Use the following IP address:
IP address: 172 . 36 . 0 . 10
Subnet mask: 255 . 255 . 0 . 0
Default gateway: 172 . 36 . 0 . 1
Obtain DNS server address automatically
Use the following DNS server addresses:
Preferred DNS server:
Alternate DNS server:
Advanced...
OK
Cancel

R1

```
Router(config-if)#no shutdown
Router(config-if)#exit
Router(config)#
*Aug 26 02:59:25.212: %LINK-3-UPDOWN: Interface Ethernet0/1, changed state to u
*Aug 26 02:59:26.214: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0
1, changed state to up
Router(config)#

Router>
Router>
Router>en
Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 23.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 24.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 26.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 32.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 45.0.0.0 255.0.0.0 12.0.0.2
Router(config)#ip route 172.36.0.0 25.0.0.0 12.0.0.2
%Inconsistent address and mask
Router(config)#ip route 172.36.0.0 255.255.0.0 12.0.0.2
Router(config)#ip route 223.0.50.0 255.255.255.0 12.0.0.2
Router(config)#exit
Router#
*Aug 26 03:26:50.474: %SYS-5-CONFIG_I: Configured from console by console
Router#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        12.0.0.0/8 is directly connected, Ethernet0/1
L        12.0.0.1/32 is directly connected, Ethernet0/1
S     23.0.0.0/8 [1/0] via 12.0.0.2
S     24.0.0.0/8 [1/0] via 12.0.0.2
S     26.0.0.0/8 [1/0] via 12.0.0.2
S     32.0.0.0/8 [1/0] via 12.0.0.2
S     45.0.0.0/8 [1/0] via 12.0.0.2
S     172.36.0.0/16 [1/0] via 12.0.0.2
      192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
 --More--
```

28°C
Mostly sunny

Search

R2

```
R2(config)#ip add 223.0.50.0 255.255.255.0 26.0.0.2
                ^
% Invalid input detected at '^' marker.

R2(config)#
*Aug 26 03:38:46.429: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/2,
sourced by aabb.cc00.0300
R2(config)#ip route 223.0.50.0 255.255.255.0 26.0.0.2
R2(config)#exit
R2#
*Aug 26 03:39:14.533: %SYS-5-CONFIG_I: Configured from console by console
R2#sh
*Aug 26 03:39:16.430: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/2,
sourced by aabb.cc00.0300
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

      12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        12.0.0.0/8 is directly connected, Ethernet0/0
L        12.0.0.2/32 is directly connected, Ethernet0/0
      23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        23.0.0.0/8 is directly connected, Ethernet0/2
L        23.0.0.1/32 is directly connected, Ethernet0/2
      24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        24.0.0.0/8 is directly connected, Ethernet0/3
L        24.0.0.1/32 is directly connected, Ethernet0/3
      26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
 --More--
*Aug 26 03:39:46.430: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/2, sourced by
C        26.0.0.0/8 is directly connected, Ethernet0/1
L        26.0.0.1/32 is directly connected, Ethernet0/1
S     32.0.0.0/8 [1/0] via 23.0.0.2
S     45.0.0.0/8 [1/0] via 24.0.0.2
S     172.36.0.0/16 [1/0] via 24.0.0.2
S     192.50.20.0/24 [1/0] via 12.0.0.1
S     223.0.50.0/24 [1/0] via 26.0.0.2
R2#
R2#
R2#
```

28°C
Mostly sunny

Search

R3

```
sourced by aabb.cc00.0220
Router(config)#ip route 223.0.50.0 255.255.255.0 23.0.0.2
Router(config)#ip route 172.0
*Aug 26 03:49:23.213: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/0,
sourced by aabb.cc00.0220
Router(config)#ip route 172.36.0.0 255.255.0.0 32.0.02
% Incomplete command.

Router(config)#ip route
*Aug 26 03:49:53.213: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/0,
sourced by aabb.cc00.0220
Router(config)#ip route 172.36.0.0 255.255.0.0 32.0.0.2
Router(config)#
Router(config)#exit
Router#s
*Aug 26 03:50:20.417: %SYS-5-CONFIG_I: Configured from console by console
Router#sh ip
*Aug 26 03:50:23.213: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/0,
sourced by aabb.cc00.0220
Router#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 23.0.0.2
      23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        23.0.0.0/8 is directly connected, Ethernet0/0
L        23.0.0.1/32 is directly connected, Ethernet0/0
S     24.0.0.0/8 [1/0] via 23.0.0.2
S     26.0.0.0/8 [1/0] via 23.0.0.2
      32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        32.0.0.0/8 is directly connected, Ethernet0/1
L        32.0.0.1/32 is directly connected, Ethernet0/1
S     45.0.0.0/8 [1/0] via 32.0.0.2
S     172.36.0.0/16 [1/0] via 32.0.0.2
S     223.0.50.0/24 [1/0] via 23.0.0.2
Router#
Router#
Router#
*Aug 26 03:50:53.213: %IP-4-DUPADDR: Duplicate address 23.0.0.1 on Ethernet0/0,
```

R4

```
R4(config)#ip route 12.0.0.0 255.255.255.0 24.0.0.0.1
                                                   ^
% Invalid input detected at '^' marker.

R4(config)#ip route 12.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 23.0.0.1 255.0.0.0 24.0.0.1
%Inconsistent address and mask
R4(config)#ip route 23.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 26.0.0.0 255.0.0.0 24.0.0.1
R4(config)#ip route 223.0.50.0 255.255.255.0 24.0.0.1
R4(config)#ip route 172.36.0.0. 255.255.0.0 45.0.0.2
                              ^
% Invalid input detected at '^' marker.

R4(config)#ip route 172.36.0.0 255.255.0.0. 45,0.0.2
                                          ^
% Invalid input detected at '^' marker.

R4(config)#ip route 172.36.0.0 255.255.0.0 45.0.0.2
R4(config)#exit
R4#
*Aug 26 03:58:16.502: %SYS-5-CONFIG_I: Configured from console by console
R4#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static rout
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 24.0.0.1
S     23.0.0.0/8 [1/0] via 24.0.0.1
      24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        24.0.0.0/8 is directly connected, Ethernet0/0
L        24.0.0.2/32 is directly connected, Ethernet0/0
S     26.0.0.0/8 [1/0] via 24.0.0.1
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        45.0.0.0/8 is directly connected, Ethernet0/1
L        45.0.0.1/32 is directly connected, Ethernet0/1
S     172.36.0.0/16 [1/0] via 45.0.0.2
S     192.50.20.0/24 [1/0] via 24.0.0.1
S     223.0.50.0/24 [1/0] via 24.0.0.1
R4#
```

R6

```
Ethernet0/3                 unassigned      YES TFTP   down                   down

R6#
*Aug 26 03:23:43.720: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Confi
g Wizard)
R6#

R6#
R6#config t
Enter configuration commands, one per line.  End with CNTL/Z.
R6(config)#ip route 192.50.20.0 255.255.255.0 26.0.0.1
R6(config)#ip route 12.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 23.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 24.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 32.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 45.0.0.0 255.0.0.0 26.0.0.1
R6(config)#ip route 172.36.0.0 255.255.0.0 26.0.0.1
R6(config)#exit
R6#
*Aug 26 04:33:59.218: %SYS-5-CONFIG_I: Configured from console by console
R6#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 26.0.0.1
S     23.0.0.0/8 [1/0] via 26.0.0.1
S     24.0.0.0/8 [1/0] via 26.0.0.1
      26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        26.0.0.0/8 is directly connected, Ethernet0/1
L        26.0.0.2/32 is directly connected, Ethernet0/1
S     32.0.0.0/8 [1/0] via 26.0.0.1
S     45.0.0.0/8 [1/0] via 26.0.0.1
S     172.36.0.0/16 [1/0] via 26.0.0.1
S     192.50.20.0/24 [1/0] via 26.0.0.1
      223.0.50.0/24 is variably subnetted, 2 subnets, 2 masks
C        223.0.50.0/24 is directly connected, Ethernet0/0
L        223.0.50.1/32 is directly connected, Ethernet0/0
R6#
```

```
R5
ocol
Ethernet0/0                172.36.0.1      YES manual up                    up
Ethernet0/1                32.0.0.2        YES manual up                    up
Ethernet0/2                45.0.0.2        YES manual up                    up
Ethernet0/3                unassigned      YES unset  administratively down down

Router#config t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#ip route 192.50.20.0 255.255.255.0 32.0.0.1
Router(config)#ip route 12.0.0.0 255.0.0.0 32.0.0.1
Router(config)#ip route 23.0.0.0 255.0.0.0 32.0.0.1
Router(config)#ip route 24.0.0.0 255.0.0.0 32.0.0.1
Router(config)#ip route 26.0.0.0 255.0.0.0 32.0.0.1
Router(config)#ip route 223.0.50.0 255.255.255.0 32.0.0.1
Router(config)#exit
Router#
*Aug 26 04:47:38.534: %SYS-5-CONFIG_I: Configured from console by console
Router#
Router#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S     12.0.0.0/8 [1/0] via 32.0.0.1
S     23.0.0.0/8 [1/0] via 32.0.0.1
S     24.0.0.0/8 [1/0] via 32.0.0.1
S     26.0.0.0/8 [1/0] via 32.0.0.1
      32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        32.0.0.0/8 is directly connected, Ethernet0/1
L        32.0.0.2/32 is directly connected, Ethernet0/1
      45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C        45.0.0.0/8 is directly connected, Ethernet0/2
L        45.0.0.2/32 is directly connected, Ethernet0/2
      172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C        172.36.0.0/16 is directly connected, Ethernet0/0
L        172.36.0.1/32 is directly connected, Ethernet0/0
S     192.50.20.0/24 [1/0] via 32.0.0.1
S     223.0.50.0/24 [1/0] via 32.0.0.1
```

opology

QEMU (Win-1)

C:\WINDOWS\system32\cmd.exe

```
Ethernet adapter Local Area Connection:

        Connection-specific DNS Suffix  . :
        IP Address. . . . . . . . . . . . : 192.50.20.100
        Subnet Mask . . . . . . . . . . . : 255.255.255.0
        Default Gateway . . . . . . . . . : 192.50.20.1

C:\Documents and Settings\user>ping 192.50.20.1

Pinging 192.50.20.1 with 32 bytes of data:

Reply from 192.50.20.1: bytes=32 time<1ms TTL=255
Reply from 192.50.20.1: bytes=32 time=1ms TTL=255
Reply from 192.50.20.1: bytes=32 time=1ms TTL=255
Reply from 192.50.20.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.50.20.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\user>ping 12.0.0.1

Pinging 12.0.0.1 with 32 bytes of data:

Reply from 12.0.0.1: bytes=32 time<1ms TTL=255
Reply from 12.0.0.1: bytes=32 time=1ms TTL=255
Reply from 12.0.0.1: bytes=32 time=1ms TTL=255
Reply from 12.0.0.1: bytes=32 time<1ms TTL=255

Ping statistics for 12.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\Documents and Settings\user>
C:\Documents and Settings\user>ping 26.0.0.2

Pinging 26.0.0.2 with 32 bytes of data:

Reply from 26.0.0.2: bytes=32 time=1ms TTL=253
Reply from 26.0.0.2: bytes=32 time=1ms TTL=253
Reply from 26.0.0.2: bytes=32 time=1ms TTL=253
Reply from 26.0.0.2: bytes=32 time=1ms TTL=253

Ping statistics for 26.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\user>ping 223.0.50.1

Pinging 223.0.50.1 with 32 bytes of data:

Reply from 223.0.50.1: bytes=32 time=1ms TTL=253
Reply from 223.0.50.1: bytes=32 time=1ms TTL=253
Reply from 223.0.50.1: bytes=32 time=1ms TTL=253
Reply from 223.0.50.1: bytes=32 time=2ms TTL=253
```

```
Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time<1ms TTL=125
Reply from 192.50.20.100: bytes=32 time<1ms TTL=125
Reply from 192.50.20.100: bytes=32 time<1ms TTL=125
Reply from 192.50.20.100: bytes=32 time<1ms TTL=125

Ping statistics for 192.50.20.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time=12ms TTL=124
Reply from 172.36.0.10: bytes=32 time<1ms TTL=124
Reply from 172.36.0.10: bytes=32 time<1ms TTL=124
Reply from 172.36.0.10: bytes=32 time<1ms TTL=124

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>ping 32.0.0.1

Pinging 32.0.0.1 with 32 bytes of data:

Reply from 32.0.0.1: bytes=32 time<1ms TTL=253
Reply from 32.0.0.1: bytes=32 time<1ms TTL=253
Reply from 32.0.0.1: bytes=32 time=1ms TTL=253
Reply from 32.0.0.1: bytes=32 time=1ms TTL=253

Ping statistics for 32.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=12ms TTL=124
Reply from 223.0.50.10: bytes=32 time=2ms TTL=124
Reply from 223.0.50.10: bytes=32 time<1ms TTL=124
Reply from 223.0.50.10: bytes=32 time<1ms TTL=124

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time<1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time=1ms TTL=124
Reply from 192.50.20.100: bytes=32 time<1ms TTL=124

Ping statistics for 192.50.20.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 24.0.0.1

Pinging 24.0.0.1 with 32 bytes of data:

Reply from 24.0.0.1: bytes=32 time=13ms TTL=253
Reply from 24.0.0.1: bytes=32 time<1ms TTL=253
Reply from 24.0.0.1: bytes=32 time=2ms TTL=253
Reply from 24.0.0.1: bytes=32 time<1ms TTL=253

Ping statistics for 24.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 13ms, Average = 3ms
```

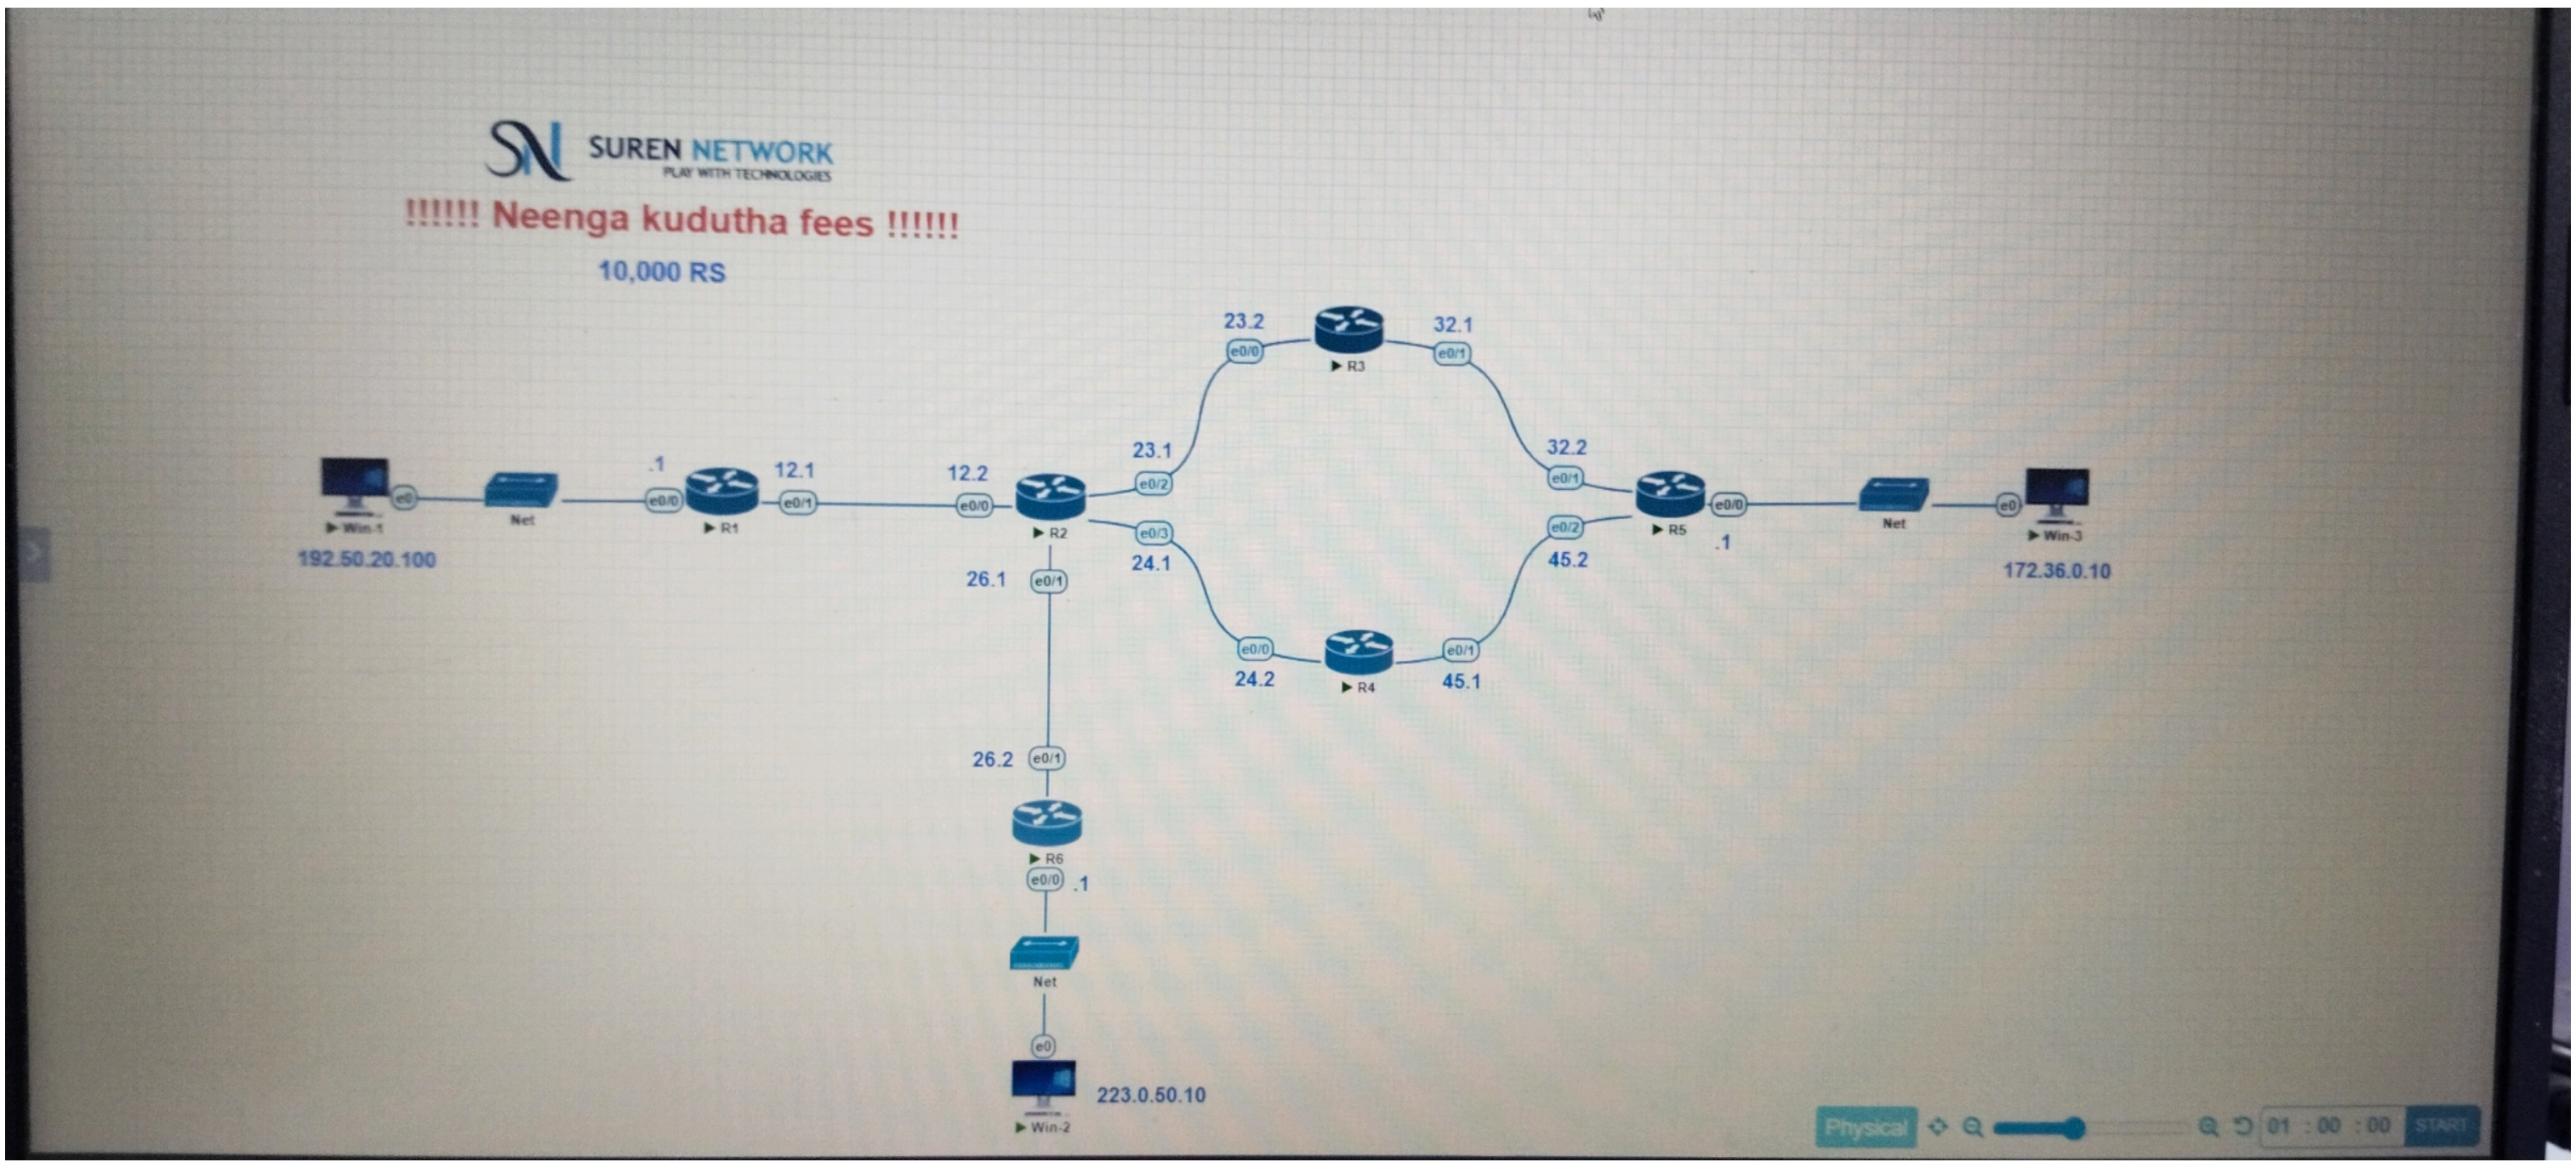
SUREN NETWORK
PLAY WITH TECHNOLOGIES
!!!!!! Neenga kudutha fees !!!!!!
10,000 RS
23.2
e0/0
R3
32.1
e0/1
.1
12.1
12.2
23.1
32.2
e0/0
e0/1
e0/0
e0/2
e0/1
e0/0
e0
Net
R1
R2
R5
Net
e0
Win-1
Win-3
192.50.20.100
26.1
e0/1
e0/3
24.1
e0/2
45.2
.1
172.36.0.10
e0/0
R4
e0/1
24.2
45.1
26.2
e0/1
R6
e0/0
.1
Net
e0
223.0.50.10
Win-2
Physical
01 : 00 : 00
START