


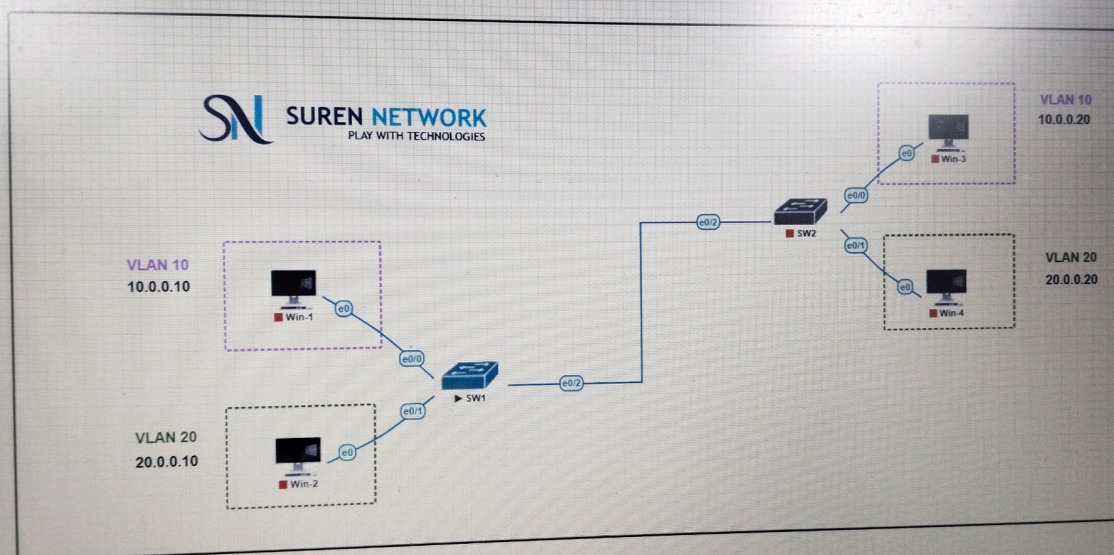

SW1

```
SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#ex
SW1(config)#exit
SW1#
*Sep 15 04:47:42.141: %SYS-5-CONFIG_I: Configured from console by console
SW1#sh vlan br
```

VLAN	Name	Status	Ports
1	default	active	Et0/2, Et0/3
10	HR	active	Et0/0
20	SALES	active	Et0/1
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

```
SW1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)#
SW1(config)#int e0/2
SW1(config-if)#switchport trunk encapsulation dot1q
SW1(config-if)#switchport mode trunk
SW1(config-if)#ex
SW1(config)#
*Sep 15 04:49:01.532: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
SW1(config)#
*Sep 15 04:49:04.536: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to up
SW1(config)#exit
SW1#
*Sep 15 04:49:11.813: %SYS-5-CONFIG_I: Configured from console by console
SW1#sh int trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Et0/2	on	802.1q	trunking	1

Port	Vlans allowed on trunk
Et0/2	1-4094

Port	Vlans allowed and active in management domain
Et0/2	1,10,20

Port	Vlans in spanning tree forwarding state and not pruned
Et0/2	none

```
SW1#
*Sep 15 04:50:01.665: %PAP-6-PAP_DISCOVERY_STOPPED: PAP Discovery stopped (Config Wizard)
SW1#
```

SW2

```
SW2(config-if)#switchport access vlan 10
SW2(config-if)#ex
SW2(config)#int e0/1
SW2(config-if)#switchport access vlan 20
SW2(config-if)#ex
SW2(config)#
SW2(config)#int e0/2
SW2(config-if)#switchport trunk encapsulation dot1q
SW2(config-if)#switchport mode trunk
SW2(config-if)#ex
SW2(config)#
*Sep 15 05:06:47.692: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
SW2(config)#
```

```
SW2(config)#ex
% Ambiguous command: "ex"
SW2(config)#exit
SW2#s
*Sep 15 05:26:53.628: %SYS-5-CONFIG_I: Configured from console by console
SW2#sh int vlan br
```

% Invalid input detected at '^' marker.

```
SW2#sh vlan br
```

VLAN	Name	Status	Ports
1	default	active	Et0/3
10	HR	active	Et0/0
20	sales	active	Et0/1
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

```
SW2#sh int trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Et0/2	on	802.1q	trunking	1

Port	Vlans allowed on trunk
Et0/2	1-4094

Port	Vlans allowed and active in management domain
Et0/2	1,10,20

Port	Vlans in spanning tree forwarding state and not pruned
Et0/2	1,10,20

```
SW2#
```

pology

x

+

labs.surennetwork.com/legacy/topology



QEMU (Win-4)



C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]

Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix	:	:
IP Address	:	20.0.0.20
Subnet Mask	:	255.0.0.0
Default Gateway	:	20.0.0.1

C:\Documents and Settings\user>ping 20.0.0.10

Pinging 20.0.0.10 with 32 bytes of data:

Reply from 20.0.0.10: bytes=32 time=4ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128
Reply from 20.0.0.10: bytes=32 time=2ms TTL=128

Ping statistics for 20.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>

QEMU (Win-1)



C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ipconfig

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address : 10.0.0.10
Subnet Mask : 255.0.0.0
Default Gateway : 10.0.0.1

C:\Documents and Settings\user>ping 10.0.0.20

Pinging 10.0.0.20 with 32 bytes of data:

Reply from 10.0.0.20: bytes=32 time=4ms TTL=128
Reply from 10.0.0.20: bytes=32 time=3ms TTL=128
Reply from 10.0.0.20: bytes=32 time=3ms TTL=128
Reply from 10.0.0.20: bytes=32 time=2ms TTL=128

Ping statistics for 10.0.0.20:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 4ms, Average = 3ms

C:\Documents and Settings\user>_