


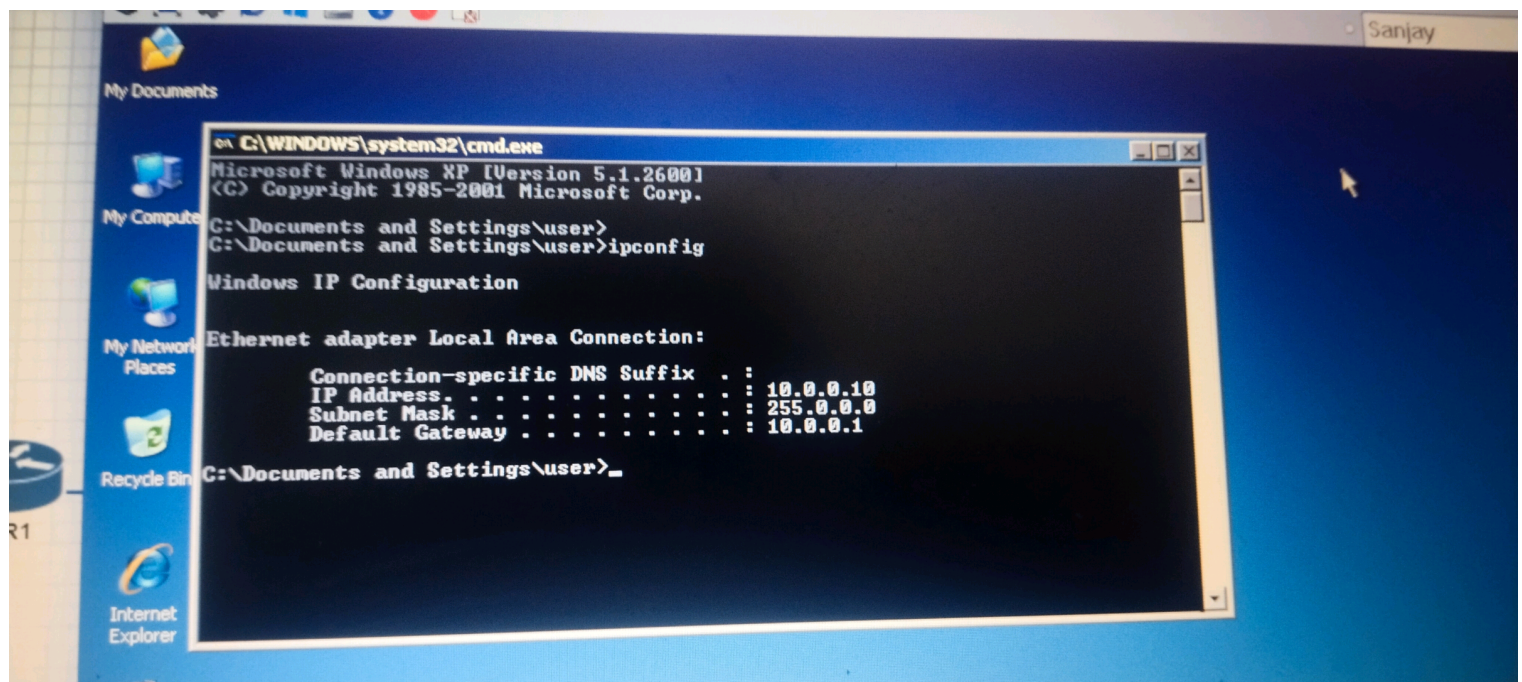

ter Loc R1#config t
ction-s Enter configuration commands, one per line. End with CNTL/Z.
dress. R1(config)#
t Mask *Aug 25 03:29:17.225: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (C
lt Gate g Wizard)
and Set R1(config)#int e0/0
R1(config-if)#ip add 10.0.0.1 255.0.0.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#int e0/1
R1(config-if)#ip add 20.0.0.1 255.0.0.0
R1(config-if)#no shutdown
R1(config-if)#exit
R1(config)#

```
R2#  
R2#  
R2#  
R2#  
R2#  
R2#  
R2#config t  
Enter configuration commands, one per line. End with CNTL/Z.  
R2(config)#int e0/0  
R2(config-if)#ip add 20.0.0.2 255.0.0.0  
R2(config-if)#no shutdown  
R2(config-if)#exit  
R2(config)#int e0/1  
R2(config-if)#ip add 30.0.0.1 255.0.0.0  
R2(config-if)#no shutdown  
R2(config-if)#exit  
R2(config)#  
*Aug 25 03:36:06.945: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)  
R2(config)#
```

```
Aug 25 03:24:59.228: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
2, changed state to down
*Aug 25 03:24:59.228: %LINEPROTO-5-UPDOWN: Line protocol on Interface Ethernet0/
3, changed state to down
```

```
R3#
```

```
R3#
```

```
R3#config t
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
R3(config)#int e0/1
```

```
R3(config-if)#ip add 30.0.0.2 255.0.0.0
```

```
R3(config-if)#no shutdown
```

```
^
```

```
% Invalid input detected at '^' marker.
```

```
R3(config-if)#no shutdown
```

```
R3(config-if)#exit
```

```
R3(config)#int e0/0
```

```
R3(config-if)#ip add 40.0.0.1 255.0.0.0
```

```
R3(config-if)#no shutdown
```

```
R3(config-if)#exit
```

```
R3(config)#
```

```
*Aug 25 03:36:21.873: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Confi
```

```
g Wizard)
```

```
R3(config)#
```

My C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>

C:\Documents and Settings\user>

C:\Documents and Settings\user>ipconfig

My Windows IP Configuration

Ethernet adapter Local Area Connection:

My Connection-specific DNS Suffix . :
IP Address : 40.0.0.10
Subnet Mask : 255.0.0.0
Default Gateway : 40.0.0.1

C:\Documents and Settings\user>

Internet
Explorer

Cisco
ASDM-1...

e0 R1#sh ip br

& Invalid input detected at '^' marker.

R1#sh ip int br

Interface	IP-Address	OK?	Method	Status	Prot
Socol					
Ethernet0/0	10.0.0.1	YES	manual	up	up
Ethernet0/1	20.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

R1#

```
R2(config)#end
R2(config-if)#ip add 30.0.0.1 255.0.0.0
R2(config-if)#no shutdown
R2(config-if)#exit
R2(config)#
*Aug 25 03:36:06.945: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R2(config)#
exit
R2#
*Aug 25 03:56:10.130: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip int br

```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	20.0.0.2	YES	manual	up	up
Ethernet0/1	30.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

```
R2#
```

```
R3(config)#  
*Aug 25 03:36:21.873: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)  
R3(config)#
```

```
R3(config)#exit  
R3#
```

```
*Aug 25 04:04:08.900: %SYS-5-CONFIG_I: Configured from console by console
```

```
R3#sh ip int br
```

Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	40.0.0.1	YES	manual	up	up
Ethernet0/1	30.0.0.2	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

```
R3#
```

31°C
Partly sunny



Search



FULL
HD 1080

Ethernet0/2	unassigned	YES TFTP	down
Ethernet0/3	unassigned	YES TFTP	down

```
R1#  
config t  
Enter configuration commands, one per line. End with CNTL/Z.  
R1(config)#ip route 30.0.0.0 255.0.0.0 20.0.0.2  
R1(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2  
R1(config)#exit
```

```
R1#  
*Aug 25 04:10:40.113: %SYS-5-CONFIG_I: Configured from console by console
```

```
R1#  
R1#sh ip route  
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
```

R2#

R2#sh ip route

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 20.0.0.1
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/0
L 20.0.0.2/32 is directly connected, Ethernet0/0
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.1/32 is directly connected, Ethernet0/1
S 40.0.0.0/8 [1/0] via 30.0.0.2

R2#

```

R3(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
R3(config)#ip route 20.0.0.0 255.0.0.0 30.0.0.1
R3(config)#exit
R3#
*Aug 25 04:10:31.254: %SYS-5-CONFIG_I: Configured from console by console
R3#
R3#
R3#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 30.0.0.1
S    20.0.0.0/8 [1/0] via 30.0.0.1
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, Ethernet0/1
L     30.0.0.2/32 is directly connected, Ethernet0/1
     40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     40.0.0.0/8 is directly connected, Ethernet0/0
L     40.0.0.1/32 is directly connected, Ethernet0/0

```

QEMU (Win-1)

C:\WINDOWS\system32\cmd.exe

```
Ping statistics for 20.0.0.1:
  Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

```
C:\Documents and Settings\user>ping 20.0.0.2
```

```
Pinging 20.0.0.2 with 32 bytes of data:
```

```
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
```

```
Ping statistics for 20.0.0.2:
  Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 1ms, Maximum = 1ms, Average = 1ms
```

```
C:\Documents and Settings\user>ping 30.0.0.1
```

```
Pinging 30.0.0.1 with 32 bytes of data:
```

```
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
Reply from 10.0.0.1: Destination host unreachable.
```

```
Ping statistics for 30.0.0.1:
  Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

```
C:\Documents and Settings\user>ping 30.0.0.1
```

```
Pinging 30.0.0.1 with 32 bytes of data:
```

```
Reply from 30.0.0.1: bytes=32 time=2ms TTL=254
Reply from 30.0.0.1: bytes=32 time=1ms TTL=254
Reply from 30.0.0.1: bytes=32 time=1ms TTL=254
Reply from 30.0.0.1: bytes=32 time=1ms TTL=254
```

```
Ping statistics for 30.0.0.1:
  Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
  Minimum = 1ms, Maximum = 2ms, Average = 1ms
```

```
C:\Documents and Settings\user>
```

```
Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\Documents and Settings\user>ping 20.0.0.2

Pinging 20.0.0.2 with 32 bytes of data:

Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254
Reply from 20.0.0.2: bytes=32 time=1ms TTL=254

Ping statistics for 20.0.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\user>ping 20.0.0.1

Pinging 20.0.0.1 with 32 bytes of data:

Reply from 20.0.0.1: bytes=32 time=1ms TTL=253
Reply from 20.0.0.1: bytes=32 time=1ms TTL=253
Reply from 20.0.0.1: bytes=32 time=1ms TTL=253
Reply from 20.0.0.1: bytes=32 time=2ms TTL=253

Ping statistics for 20.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time=1ms TTL=253
Reply from 10.0.0.1: bytes=32 time=2ms TTL=253
Reply from 10.0.0.1: bytes=32 time=2ms TTL=253
Reply from 10.0.0.1: bytes=32 time=1ms TTL=253

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```