





NOVA CABLE COMPANY

FIBER OPTIC COMPONENTS

An ISO 9001:2015 Certified Company



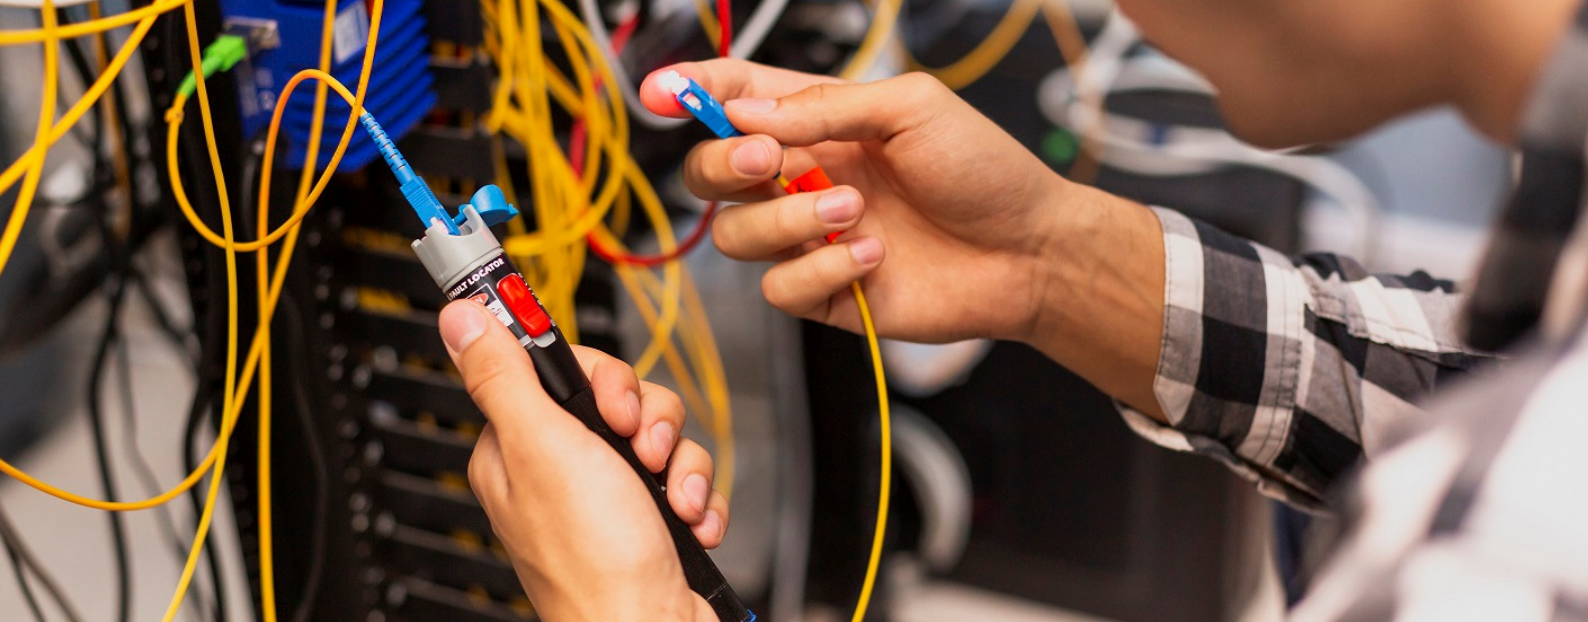

COMPANY PROFILE

Nova Cable Company (NCC) is one of the most reliable and reputed names in the business of Telecom Products & Solutions to Private sector as well as govt. sector. NCC established in 1993 and headquartered at New Delhi, was one of the first organizations to start manufacturing Coaxial Cables in 2005, we started manufacturing Optical Fibre Patch Cords & Accessories. In Oct' 2021 we also started manufacturing Optical Fibre Cables up to 12F unarmoured Cable. Our brands TM Scientific, Geberit and TNT in Coaxial Cables and Fibre Optics are well established and have pan India reach through our distribution network. We have a very competent & qualified team along with distribution network to cater various products to the entire satisfaction of our esteemed clients.

Everything we do at NCC is built on a platform based on solid core values designed and implemented to serve our clients. We foster the spirit of team work in ensuring that our clients view us as partners in their business. Our products are shaped by each client's unique needs and business context, aimed at giving the best of their spend.

Complete commitment to our core values, to our clients, to our people; to innovation and knowledge have helped us remain the most reliable partner to our clients.





QUALITY POLICY

We at NCC are committed to satisfying the need of our customers, clients and all stakeholders by ensuring timeliness, reliability, affordability and trustworthiness of our products and services.

We are committed to try to exceed customer expectation through adherence to internationally recognized quality management systems. It is this commitment to quality that allows us to deliver exceptional quality products to our clients.

Our mission is to provide technology and solutions with an expertise, so that the end user can access the internet at the speed of light. We want every home in India, to be a smart home and provide enough digital infrastructure that allows everyone to be a part of the digital society.

Our aim is to add value to our partners by simplifying their digital infrastructure needs and work in association with them to deliver more than just equipment but bring innovative, real-world solutions for all their IT needs.






NOVA CABLE COMPANY
Complete FTTH Solutions



INFRASTRUCTURE

At NCC our mission is to be a leader in innovation and development of Telecom Products. We view ourselves as Products & Solutions provider to our clients. We are committed to providing world class telecommunication products through design and development of cutting edge, reliable and cost effective products.

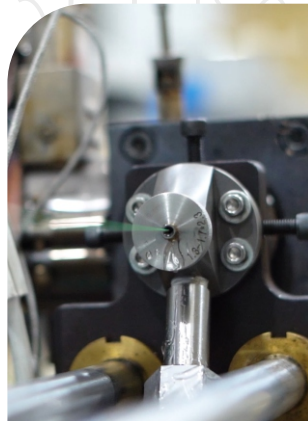



EXHIBITION

At NCC our mission is to be a leader in innovation and development of Telecom Products. We view ourselves as Products & Solutions provider to our clients. We are committed to providing world class telecommunication products through design and development of cutting edge, reliable and cost effective products.



Cables Category

1. Optical Fiber Cable

- Single Tube: 2F to 12F
- Multitube Armoured: 2F to 288F
- Multitube Unarmoured: 12F to 48F

2. Simplex Cable: 2mm & 3mm

3. Duplex Cable

- Single and Multimode Both

4. FTTH

- Single Fiber
- Dual Fiber
- Figure 8



5. LAN Cables


- CAT 6
- CAT 6E

6. CPRI Cables

7. Coaxial Cables

- RG 6
- RG 11

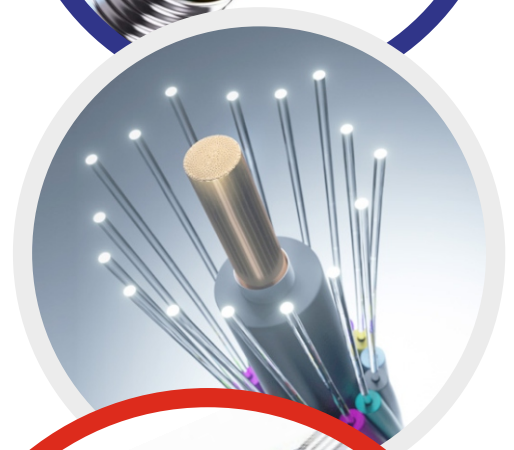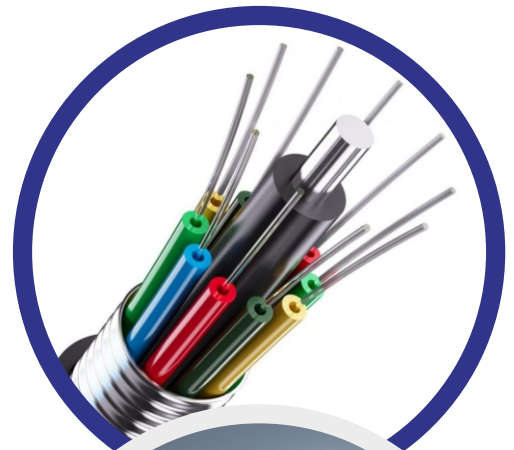

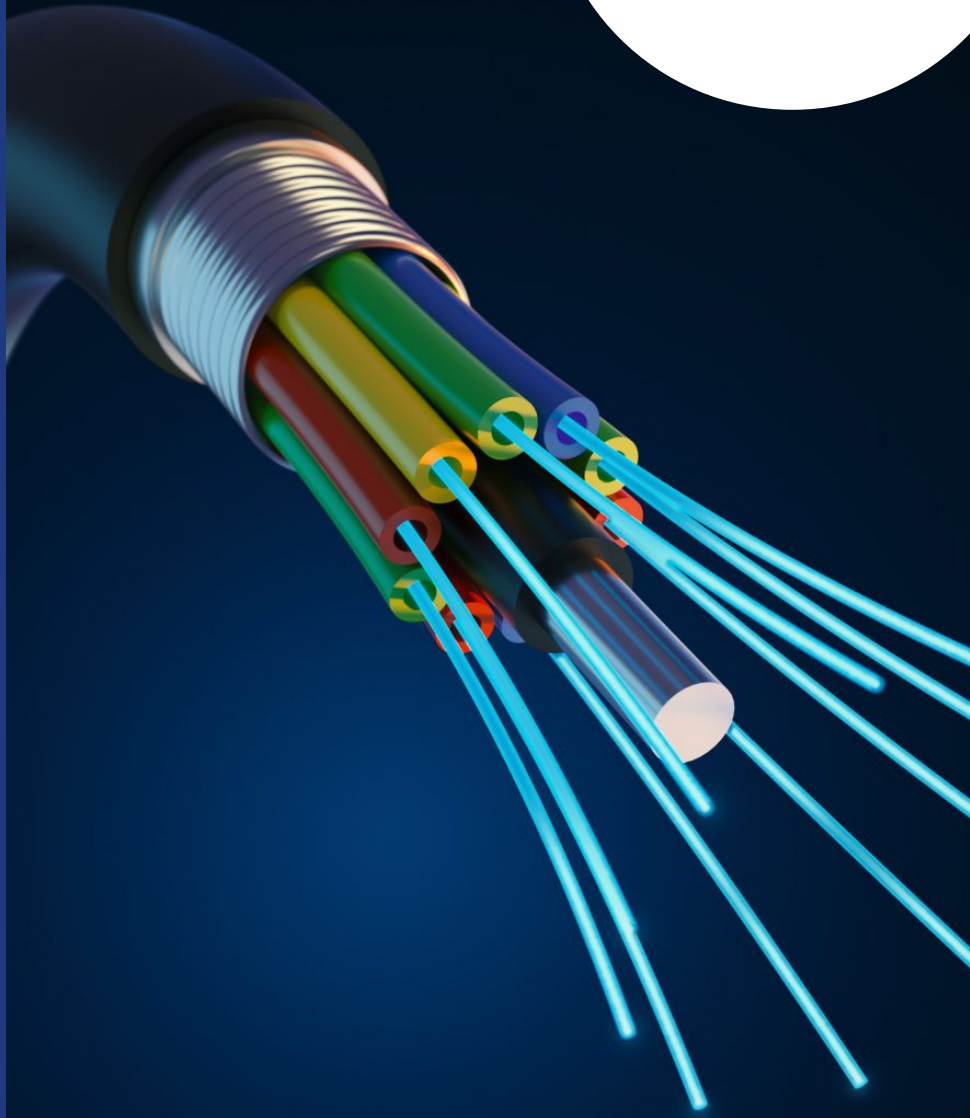

OPTICAL FIBER CABLE

ALL TYPES OF
CUSTOMIZABLE
FIBER CABLE
AVAILABLE



Scientific Optical Fiber Cable

UnArmoured Optic Fiber Cables are protected by glass-yarn in the loose tube except the steel type protection.

This Cable Offers Excellent Water Proofing & Light Weight, Compact Small Size For Easy Handling.

This Cable Offers Excellent Protection From Moisture, Comply To Latest Industry Standards I.e Iec, Itc Iso.


FEATURES

- ❖ Suitable for Indoor/Outdoor (duct) arial, pipeline.
- ❖ Excellent water proofing performance.
- Light weight, small and compact size cable.

SPECIFICATIONS

Mechanical & Environmental Characteristics

- ❖ Operating Temperature: -20 deg C to +60 deg C
- ❖ Storage Temperature: -40 deg C to +60 deg C
- ❖ Jacket Material : LSZH / HDPE
- **2, 4, 6 & 12 Core Available**
- **Od - 5.5 To 6.5 Mm**
- **Available With Yarn And Without Yarn**

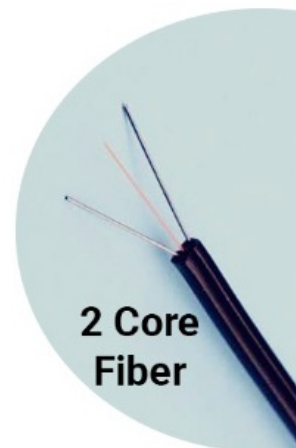


1. Optical Fiber Cable

2F to 12F G 652 D Multitube Single Sheath Armoured OF Cable

Fiber Allocation Scheme

Tube Colour	Fiber Type	No of Fiber
Blue	SM G 652 D	4
Orange	SM G 652 D	4
Green	SM G 652 D	4

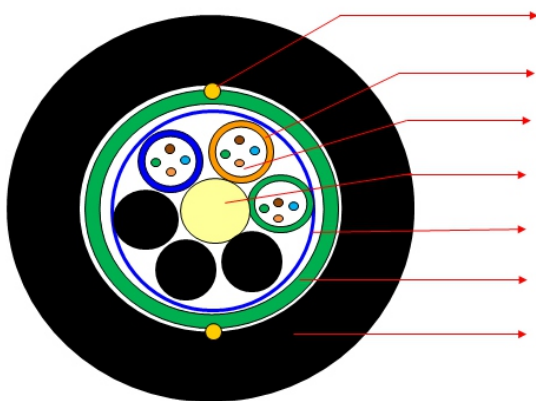

2-RIP CORD BEL
PBT LOOSE TUBE
G 652 D
FRP AS CSM
POLYESTER
ECCS Tape Armouring
Outer Jacket

Construction Details


No of Fibre/Tube	: 04F per Tube -Blue, Orange, Green & Brown
Loose Tube	: PBT Loose Tube Filled With Thixotropic Jelly (2.0± 0.2 mm).
No of Loose Tube	: Three Loose Tubes
No of Fillers	: Three Fillers (Black)
Tube & Filler Identification	: Blue, Orange, Green, Filler 01, Filler 02 & Filler 03
Central Strength Member	: Fiber Reinforced Plastic - FRP (Non Metallic) (2.0 mm ± 0.1 mm)
Core Wrapping	: Core Wrapped With Polyester Tape & Binder Yarn
Peripheral Strength Member	: IGFR (Non-water Blocking Type) Applied in the periphery over the Core.
Armouring	: Corrugated Steel Tape Armouring Below The Outer Sheath (Thickness 0.155 ± 0.005)
Rip Cord	: Two Rip Cords provided below the Armouring
Outer Jacket	: Outer Jacket HDPE UV Black Colour - 1.6 mm (Nominal)

1. Optical Fiber Cable

2F to 288F G652D / G657 A1/A2 Multitube Armoured OF Cable

Fiber Allocation Scheme

Tube Colour	Fiber Type	No of Fiber
Blue	SM G 652 D	12
Orange	SM G 652 D	12
Green	SM G 652 D	12
Brown	SM G 652 D	12
Slate	SM G 652 D	12
White	SM G 652 D	12
Red	SM G 652 D	12
Black	SM G 652 D	12
Yellow	SM G 652 D	12
Violet	SM G 652 D	12
Pink	SM G 652 D	12
Aqua	SM G 652 D	12

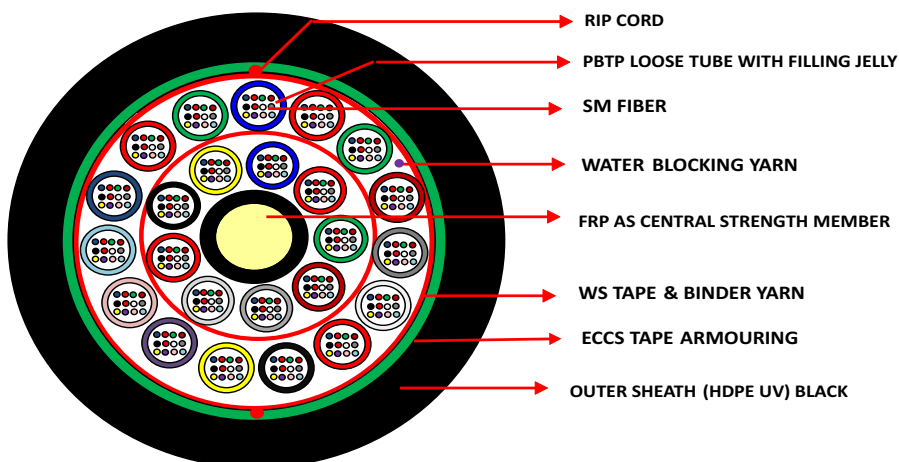

Construction Details


No of Fibre/Tube	: 12Fper Tube Blue,Orange,Green,Brown,Slate,White, Red,Black,Yellow, Violet, Pink& Aqua
LooseTube Layer1	: PBTLooseTubeFilledWith ThixotropicJelly(1.9±0.1 mm)
LooseTube Layer 2	: PBTLooseTubeFilledWith ThixotropicJelly(1.9±0.1 mm)
No of LooseTube Layer1	: 09(Nine)LooseTube
No of LooseTube Layer2	: 15(Fifteen)LooseTube
Tube Identification Layer1	: Blue,Orange,Green,BrownSlate,White, Red,Black& Yellow
Tube Identification Layer2	: Blue,Orange,Green,Brown,Slate,White, Red,Black,Yellow, Violet, Pink,Aqua,BlueStrip Marked, OrangeStrip Marked& GreenStrip Marked
Water BlockingElements	: Water SwellableTape& Water BlockingYarns
Central StrengthMember	: FiberReinforcedPlastic FRP(Non Metallic) 3.0±0.1 mm UpsheatTo 4.0±0.1 mm
Moisture Barrier(Protection)	: Water BlockingYarns& Water SwellableTape
CoreWrapping	: Water SwellableTapeWith BinderYarn
Armouring	: Corrugated ECCSTape Applied Over the Core
CoreWrapping	: CoreWrappedWith Water BlockingTape& BinderYarn
RipCord	: Two Ripcord providedBelowTheSheath
OuterSheath	: HDPEUVBlackColour 1.60mm(Nominal)

1. Optical Fiber Cable

2F to 48F G652D / G657 A1/A2 Multitube Unarmoured OF Cable

Fiber Allocation Scheme

Tube Colour	Fiber Type	No of Fiber
Blue	SM G 652 D	8
Orange	SM G 652 D	8
Green	SM G 652 D	8
Brown	SM G 652 D	8
Slate	SM G 652 D	8
White	SM G 652 D	8

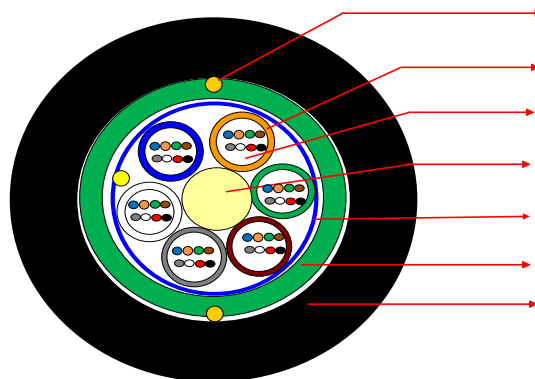

- 2-RIP CORD BELOW ARMOUR
- PBT LOOSE TUBE
- G 652 D OPTICAL FIBER 8 FIBER/TUBE
- FRP AS CSM
- POLYESTER WRAPPING AND IGFR
- ECCS TAPE Armouring
- Outer Jacket

Construction Details

NoofFibre/Tube	: 8Fper Tube-Blue,Orange,Green,Brown,Slate,White, Red& Black.
LooseTube	: PBTLooseTubeFilledWith ThixotropicJelly(2.1±0.2 mm)
NoofLooseTube	: SixLooseTubes
NoofFillers	: NA
Tube& FillerIdentification	: Blue,Orange,Green,Brown,Slate& White
CentralStrengthMember	: FiberReinforcedPlastic- FRP(NonMetallic)(2.2mm±0.1 mm)
CoreWrapping	: CoreWrappedWith PolyesterTape& BinderYarn
PeripheralStrengthMember	: IGFR(Non-waterBlockingType)Applied in the peripheryoverthe Core.
Armouring	: CorrugatedSteelTapeArmouringBelowTheOuter Sheath(Thickness0.155±0.005)
RipCord	: Two RipCordsprovidedbelow the Armouring
OuterJacket	: Outer JacketHDPEUV BlackColour- 1.6mm(Nominal)

1. Optical Fiber Cable

Fibre Characteristics (As per ITU-T Rec. G. 652 D)			
Attenuation (Transmission Characteristics)		Geometrical Characteristics	
@ 1310 nm	: ≤ 0.335 (dB/Km) - Before cabling : ≤ 0.34 (dB/Km) - After cabling	Mode Field Diameter @ 1310 nm	: 9.2 ± 0.4 μm
@ 1550 nm	: ≤ 0.19 (dB/Km) - Before cabling : ≤ 0.20 (dB/Km) - After cabling	Mode Field Diameter @ 1550 nm	: 10.4 ± 0.5 μm
@ 1625 nm	: ≤ 0.215 (dB/Km) - Before cabling : ≤ 0.220 (dB/Km) - After cabling	Cladding Diameter	: 125 ± 0.7 μm
Dispersion		Cladding Non Circularity	: ≤ 1%
A. Total Dispersion (Chromatic Dispersion)		Core Clad Concentricity Error	: ≤ 0.5 μm
1285-1330 nm	: ≤ 3.5 ps/nm.km	Coating Diameter	: 245 ± 10 μm
1270-1340 nm	: ≤ 5.3 ps/nm.km	Coating/Cladding Concentricity	: ≤ 12 μm
1550 nm	: ≤ 18.0 ps/nm.km	Cut Off Wavelength	
1625 nm	: ≤ 22.0 ps/nm.km	Fibre cut-off Wavelength	: ≤ 1320 nm
B. Polarization Mode Dispersion at 1310 & 1550 nm		Cable Cut-off Wavelength	: ≤ 1260 nm
At Fibre Stage	: ≤ 0.2 ps/sqrt.km	Mechanical & Operating Characteristics	
At Cable Stage	: ≤ 0.6 ps/sqrt.km	Operating Temperature	: -20° C to +60° C
C. Dispersion Slope & Wave Length		Fibre Proof Test	: 1%
Zero Dispersion Wavelength	: 1300-1324 nm	Stripability Force	: 1.3 ≤ F ≤ 8.9 N
Zero Dispersion Slope	: ≤ 0.092 ps/nm².km	Fibre Curl	: 4 meter radius of curvature
Cable Mechanical & Physical Characteristics			
Cable Mechanical Characteristics		Cable Physical Characteristics	
Max. Tensile Strength	: 9.81 x 2.5 x W (Newton) @ 0.25%	Cable Diameter (Nominal)	: 10.5 ± 0.5 mm
Crush Resistance	: 3000 N/10 CM	Nominal Cable Weight	: 110 ± 10 Kg/Km
Impact Resistance	: 50 N for 0.5m	Packing Length	: 2 Km ± 10% : 4 Km ± 5% & SLG > 500 Meter
Torsion	: ±180°	Water Penetration	: 3mts Sample for 24Hrs
Min. Bending Radius - Long Term - Short Term	: 20D (D= Cable Diameter mm) : 10D (D= Cable Diameter mm)	Printing Details	: As Per Customer Requirement

2. Simplex Cable

A simplex fiber optic cable consists of a single strand of glass or plastic fiber. Simplex fiber is most often used where only a single transmit and/or receive line is required between devices or when a multiplex data signal is used (bi-directional communication over a single fiber).

PRODUCT APPLICATION

Simplex Cables are used mostly for patch cord. Duplex Cables are used in applications where data needs to be transferred bi-directionally.


STANDARDS

IEC 60794; ITU-T

CONSTRUCTION DETAILS

1-OUTER SHEATH LSZH & PVC | 2-PERIPHERAL STRENGTH MEMBER ARAMID YARN | 3-COLORED TIGHT BUFFERED WITH FIBER

SIMPLEX CABLE (1F)

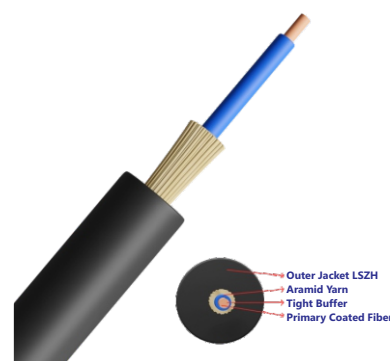

TECHNICAL DATA

	SIMPLEX	SIMPLEX	DUPLEX	DUPLEX
FIBER COUNT	3	2	3 x 6.2	2 x 4.2
CABLE DIAMETER (MM) +/- 5%	3	2	3 x 6.2	2 x 4.2
CABLE WEIGHT (KG/KM) +/- 10%	9	4	18	8

MECHANICAL PARAMETER

MAX. TENSILE STRENGTH (N)	150	100	200	150
CRUSH RESISTANCE (N/100 X 100 MM)	300	200	300	200
BENDING RADIUS (DYNAMIC)	20D			
ENVIRONMENTAL CONDITIONS	Operating Temperature: -20°C to + 70°C Storage Temperature: -30°C to + 70°C Installation Temperature: -10°C to + 70°C			

OPTICAL PARAMETER

FIBER TYPE	G.657A1	G.657A2
ATTENUATION (dB/km)	TYPICAL/MAXIMUM	TYPICAL/MAXIMUM
1310 nm	0.34	0.335/0.380
1550 nm	0.25/0.3	0.200/0.250

3. Duplex Cable

A duplex fiber optic cable consists of two strands of glass or plastic fiber. Typically found in a “zipcord” construction format, this cable is most often used for duplex communication between devices where a separate transmit and receive are required.

PRODUCT APPLICATION

Simplex Cables are used mostly for patch cord. Duplex Cables are used in applications where data needs to be transferred bi-directionally.

STANDARDS

IEC 60794; IEC 60793; ITU-T ;Telecordia GR-20

CONSTRUCTION DETAILS

- 1-OUTER SHEATH | 2-PERIPHERAL STRENGTH MEMBER**
3-COLORED TIGHT BUFFERED WITH FIBER

DUPLEX CABLE (2F)



TECHNICAL DATA

	SIMPLEX	SIMPLEX	DUPLEX	DUPLEX
FIBER COUNT	3	2	3 x 6.2	2 x 4.2
CABLE DIAMETER (MM) +/- 5%	3	2	3 x 6.2	2 x 4.2
CABLE WEIGHT (KG/KM) +/- 10%	9	4	18	8

MECHANICAL PARAMETER

MAX. TENSILE STRENGTH (N)	150	100	200	150
CRUSH RESISTANCE (N/100 X 100 MM)	300	200	300	200
BENDING RADIUS (DYNAMIC)	20D			
ENVIRONMENTAL CONDITIONS	Operating Temperature: -20°C to + 70°C Storage Temperature: -30°C to + 70°C Installation Temperature: -10°C to + 70°C			


OPTICAL PARAMETER

FIBER TYPE	G.657A1	G.657A2
ATTENUATION (dB/km)	TYPICAL/MAXIMUM	TYPICAL/MAXIMUM
1310 nm	0.38/0.4	0.335/0.380
1550 nm	0.25/0.3	0.200/0.250

4. FTTH

Ftth cable (Fiber to the home) drop cable, the outer skin is generally black and white, the diameter is relatively small, and the flexibility is good; the cross section is 8-shaped, the reinforcing member is located at the center of the two circles, and the metal or non-metal structure can be used, and the optical fiber is located at the geometric center of the 8-shaped shape. The fiber inside the cable is mostly G.657A2 small bending radius fiber, which can be laid at a bending radius of 20mm. It is suitable for entering the house by pipe or distribution openly. The unique 8-shaped structure of the drop cable can realize the field end in the shortest time.

- **Single Fiber**
- **Dual Fiber**
- **Figure 8**

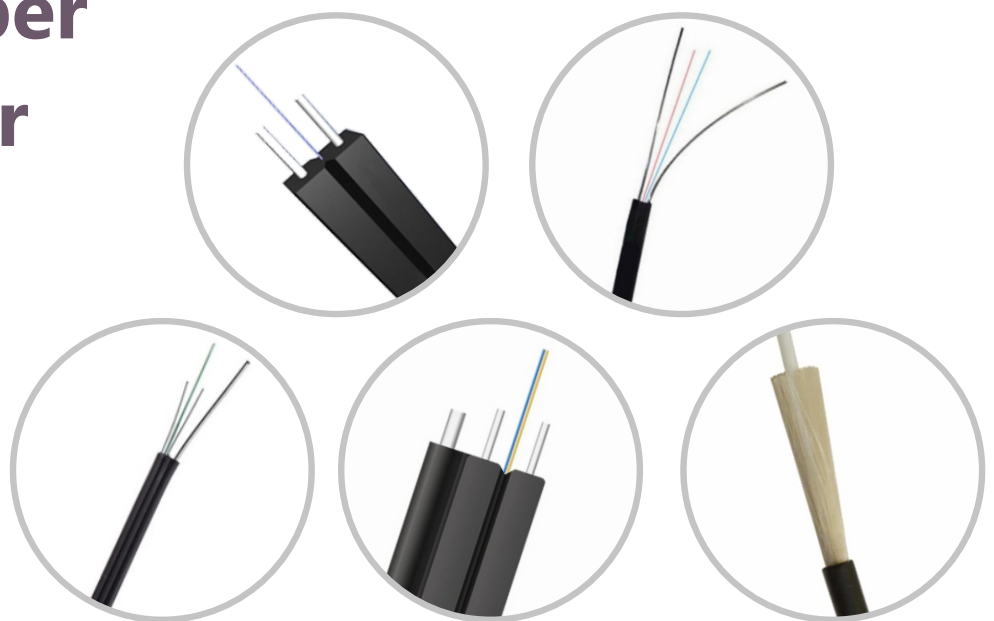



5. LAN Cable

CAT6

TIA's CAT6 standard sets the bar for CAT6 cables and connectivity. The data transmission must perform above the TIA limit for up to 250MHz. The cable can extend up to 100 meters and transfer data at a maximum data rate of 1Gbps (1000-BASE-T).

CAT6e

CAT6e is not an actual standard. It has not been implemented or qualified by the TIA or any other reputable organization or commission. CAT6e is incomparable to CAT6 because the standard technically does not exist. A correct comparison would be between CAT6 and CAT6A. CAT6 is the original version, while CAT6A is the advanced version.

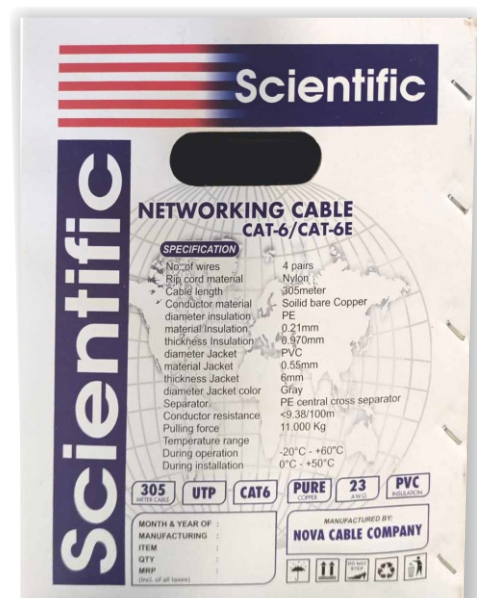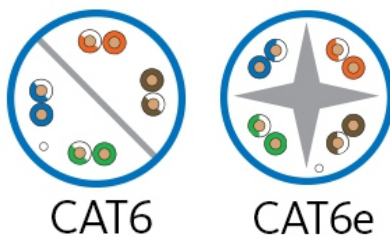

5. LAN Cable

CAT 6 & CAT 6E

FEATURES

- ❖ Comply with Cat 6 specifications
- ❖ 4-pair unshielded twisted pair (UTP) cable / (STP) cable
- ❖ Pairs are braided in aluminum foil with drain wire
- ❖ 23 AWG solid copper conductor for superior conductivity
- ❖ FR PVC Jacket
- ❖ Verified compliant with EIA/TIA standards by ETL
- ❖ Packaged in an easy-to-pull box for easier installation



6. CPRI Cable



CPRI Armored Single Mode Optical Fiber Cable
Fiber Mode: Singlemode
Armoring: Armored
Fiber Type: 9/125 μ m Optical Fiber
Fiber Count: 2
Cable Dia.: 8.2 ± 0.2 mm
Connector: LC-LC
Operating Temp.: -40degC to +85degC



CPRI Armored Multi Mode Optical Fiber Cable
Fiber Mode: Multimode OM4
Armoring: Armored
Fiber Count: 2
Cable Dia.: 8.2 ± 0.2 mm
Connector: LC-LC, Duplex
IP Protection: IP68 (with waterproof boot)
Operating Temp.: -40degC to +85degC



CPRI Armored Single-mode Outdoor Cable
Fiber Mode: Single Mode
Armoring: Armored
Fiber Count: 2
Cable Dia.: 4.8 ± 0.2 mm
Connector: LC-LC, Duplex
IP Protection: IP66 & IP67
Operating Temp.: -40degC to +75degC

7. Coaxial Cables

Advantages of Coaxial Cable

In a world enamored with fiber optics and blazing speeds, it's easy to underestimate the humble coaxial cable, often nicknamed "coax." But don't let its unassuming demeanor fool you – coax still packs a punch in the connectivity arena, boasting a unique set of advantages that keep it relevant in the digital age.

Reliability in Signal Transmission

Coaxial cable construction provides a reliable means of signal transmission. Its shielding protects against external interference, ensuring a consistent and clear signal.


Resistance to Interference

The metallic shield surrounding the core conductor acts as a barrier against electromagnetic interference. This resistance is crucial for maintaining signal integrity in various applications.

Durability and Longevity

coaxial wire is known for its robustness. Designed to withstand environmental factors, it ensures a durable and long-lasting connectivity solution for diverse settings.



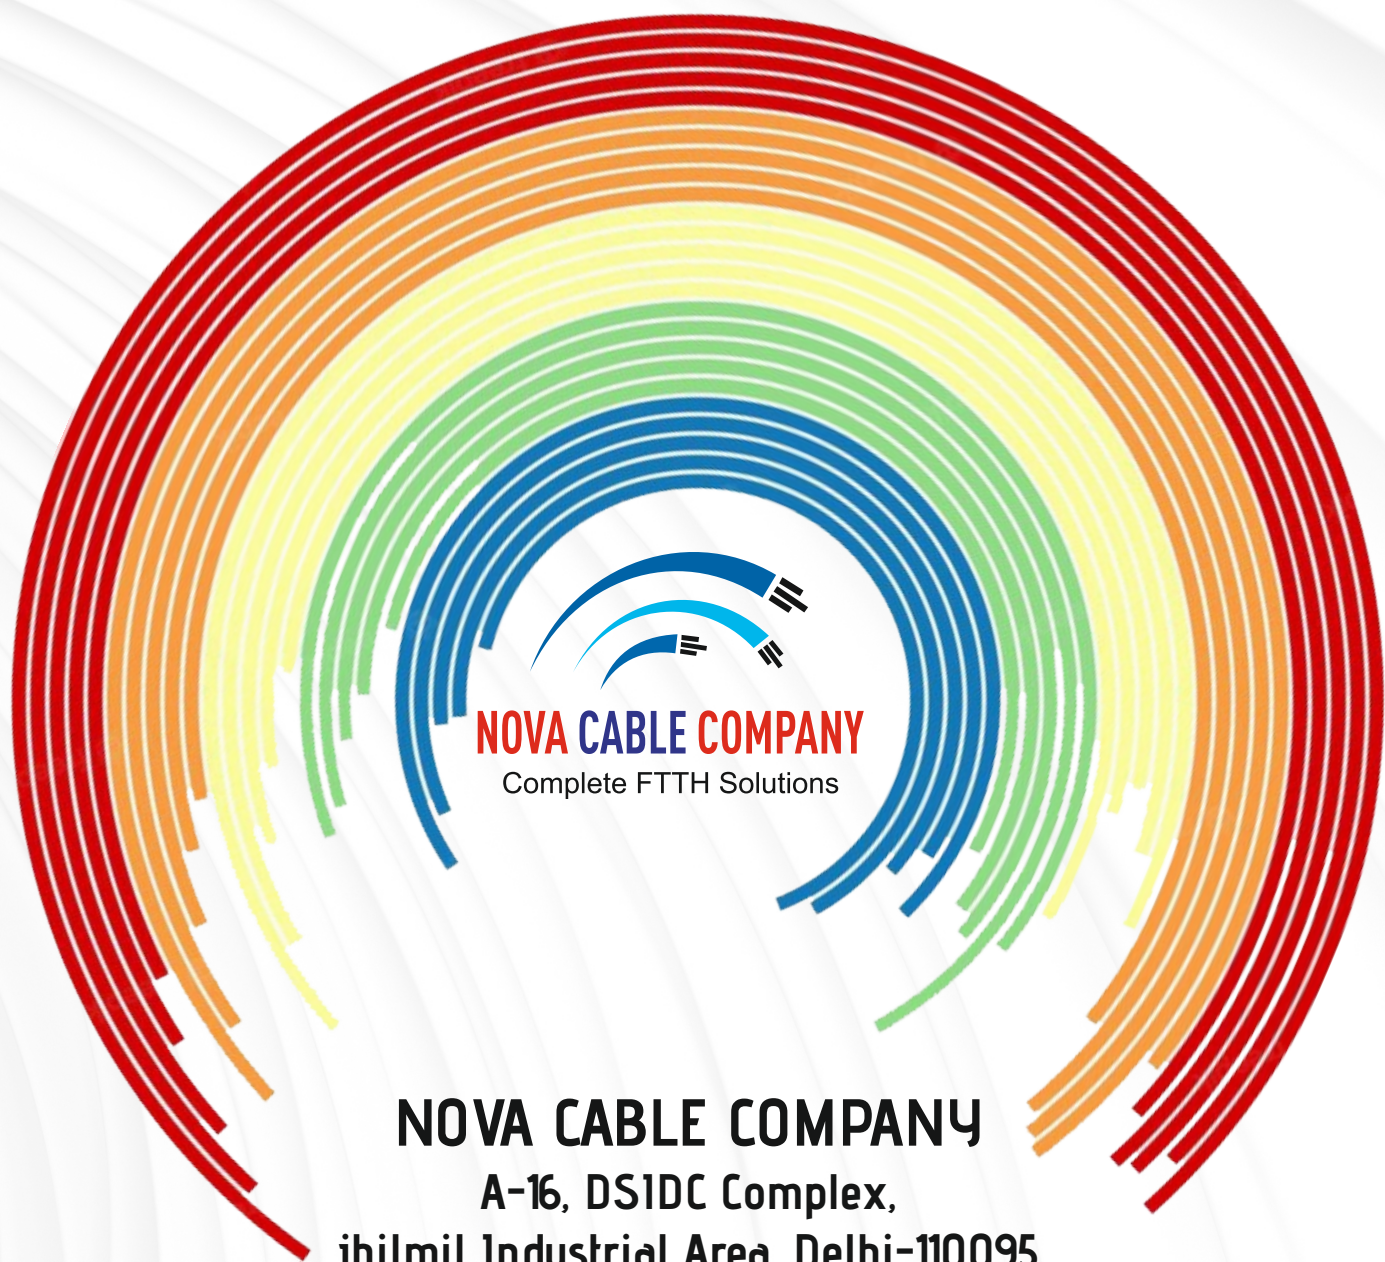

NOVA CABLE COMPANY

A-16, DS1DC Complex,
jhilmil Industrial Area, Delhi-110095

Phone No: +91-11-42683021

Email ID: info@novacablecompany.com

WWW.NOVACABLECOMPANY.COM

Follow us:      