

Single Fiber Fusion Splicer 72S Core Alignment



Innovation at your fingertips

Core Alignment Fusion Splicer 72S

Not just ease of use. Stable splicing quality with our standard features.

72S Specification



Item		Specification
Fiber alignment method		Active core alignment
Fiber count can be spliced		Single fiber
Applicable fiber	Fiber type	Single mode optical fiber
		Multi mode optical fiber
Applicable coating	Cladding dia.	80 to 150 μ m
	Sheath clamp	Coating dia.: Max. 3,000 μ m Cleave length : 5 to 16mm *1
	Fiber holder	Coating dia. : Refer to options Cleave length : Approx. 10mm
		ITU- T G.652 : Avg. 0.02dB ITU- T G.651 : Avg. 0.01dB ITU- T G.653 : Avg. 0.04dB ITU- T G.654 : Avg. 0.04dB ITU- T G.655 : Avg. 0.04dB ITU- T G.657 : Avg. 0.02dB
Fiber splice performance	Splice loss	SM FAST mode : Avg. 7 sec
	Splice time	
Applicable protection sleeve	Sleeve type	Heat shrinkable sleeve
	Sleeve length	Max. 66mm
Sleeve heat performance	Sleeve die	Max. 6.0mm before shrinking
	Heat Time	60mm slim mode : Avg. 14 to 21 sec. 60mm mode : Avg. 24 to 27 sec.
Fiber tensile test force		Approx. 2.0N
Electrode life		Approx. 6,000 splices
Physical discription		
	Dimensions	157mm (W) 178mm (D) 171mm (H)
	Weight	Approx. 2.6kg including battery
Environmental condition	Temperature	Operate : -10 to 50°C Storage : -40 to 80°C
	Humidity	Operate : 0 to 95% RH non - condensing Storage : 0 to 95% RH non - condensing
Display	Altitude	Max. 5,000m
	LCD monitor	TFT 4.95 inches with touch screen
Illumination	Magnification	Approx. 320x
	V - grooves	LED lamp
Interface	PC	USB2.0 Type C (USB PD is available) USB 3.0 is unavailable for communication Only Power receiving function is available for PD
	External LED lamp	USB 2.0 A type Approx DC5V, 500mA
Data storage	Ribbon Stripper	Mini DIN 6pin DC12V.max 1A
	Splice mode	100 splice modes
	Heat mode	30 Heat modes
	Splice result	20,000 splices
AC adaptor	Splice image	100 images
	Input	AC100 to 240V, 50/60Hz, Max. 1.5A
External Input	Output	Approx. DC 12V, Max. 5A
	Input	DC10-15V, Max. 7A
Battery Pack	Type	Rechargeable Lithium Ion
	Output	Approx. DC14.4V, 6,380mAh
	Capacity	Approx. 300 splice and heat cycles
	Recharge	4 to 6 hours from empty
Other features	Battery life	Approx. 500 recharge cycles
	Automatic functions	Splice Start Heater Start Sheath clamp : open Fusion Control
	Special splice	Attenuation splice
	Electrode	Replaceable without tool
	Software update	Splice firmware update via internet

Standard Package

Item	Model	Qty
Core Alignment Fusion Splicer	72S	1pc
(1) Battery Pack *	BTR-19	1pc
(2) AC Adapter	ADC-22	1pc
(3) AC Power Cord	ACC-19	1pc
(4) USB Cable	USB-02	1pc
(5) Fusion Splicer Strap	ST-02	1pc
(6) Electrodes, for spare	ELCT2-16C	1pairs
(7) Fiber Holder Set Plate	SP-05	1pairs
(8) Carrying Case	CC-47	1pc
(9) Splice Test Report		1pc
(10) Alcohol Dispenser	AP-02	1pc
(11) Instruction Manual	PDF File Store in Splicer	
(12) Single Fiber Stripper	SS05	1pc
(13) Optical Fiber Cleaver	CT16	1pc
(1) Fiber Scrap Collector	FDB-06	1pc
(2) Fiber Setting Plate	AD-16A	1pc
(4) Hexagonal Wrench	HEX-01	1pc

Our after-sales service

Keith has a PAN India sales & service Network. We provide comprehensive after-sales services, this ensures our products maximum lifetime.

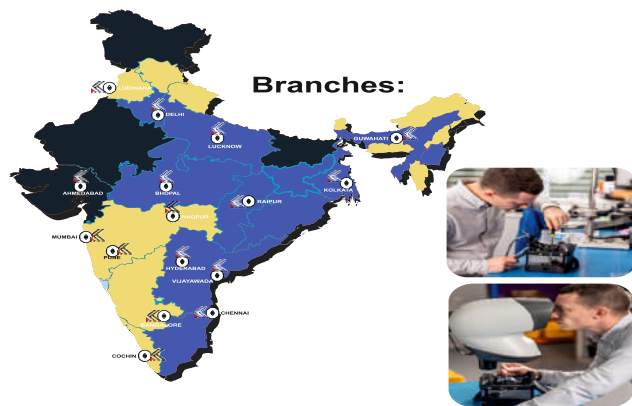

ACTIVE FUSION
CONTROL TECHNOLOGY

~ For optimal arc conditions ~

Optical fiber type and end-face condition are analyzed in real-time, and arc conditions are automatically adjusted for optimal performance. This ensures consistently low splice loss.

*Please follow IATA regulation when shipping the battery by air.

TOLL FREE NO. : 1800-1020-429

Keith Electronics Pvt. Ltd.

Arise Tower, C-117, 8th Floor, Naraina Industrial Area, Phase-I, New Delhi-110028, INDIA

Phone: +91-8800484008, 9312266960

E-mail: feedback@kepl.co.in, info@keithelectronics.com, Website: www.keithelectronics.com



BRANCHES:

Ahmedabad, Bangalore, Bhopal, Chennai, Cochin, Guwahati, Hyderabad, Kolkata, Lucknow, Ludhiana, Mumbai, Nagpur, Pune, Raipur, Vijayawada