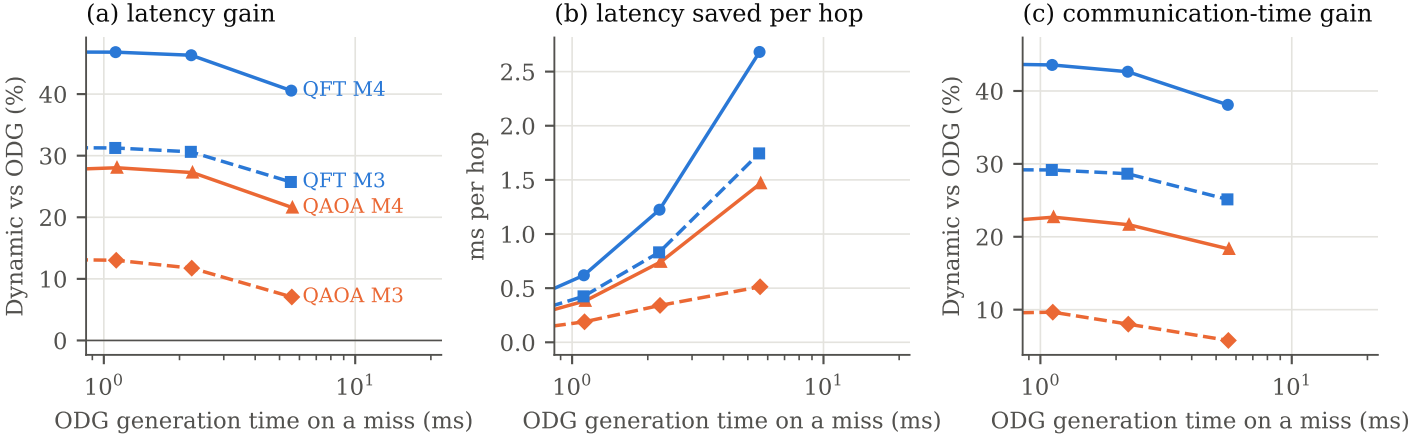
(a) latency gain
Dynamic vs ODG (%)
40
30
20
10
0
QFT M4
QFT M3
QAOA M4
QAOA M3
10^0
10^1
ODG generation time on a miss (ms)
(b) latency saved per hop
ms per hop
2.5
2.0
1.5
1.0
0.5
0.0
10^0
10^1
ODG generation time on a miss (ms)
(c) communication-time gain
Dynamic vs ODG (%)
40
30
20
10
10^0
10^1
ODG generation time on a miss (ms)