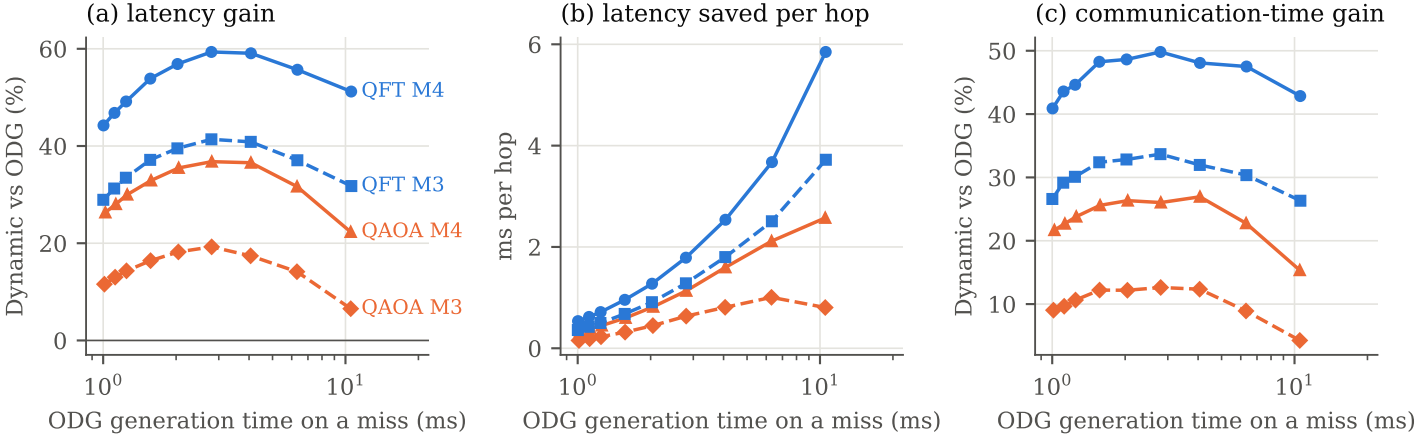
(a) latency gain
Dynamic vs ODG (%)
60
40
20
0
QFT M4
QFT M3
QAOA M4
QAOA M3
10^0
10^1
ODG generation time on a miss (ms)
(b) latency saved per hop
ms per hop
6
4
2
0
10^0
10^1
ODG generation time on a miss (ms)
(c) communication-time gain
Dynamic vs ODG (%)
50
40
30
20
10
10^0
10^1
ODG generation time on a miss (ms)