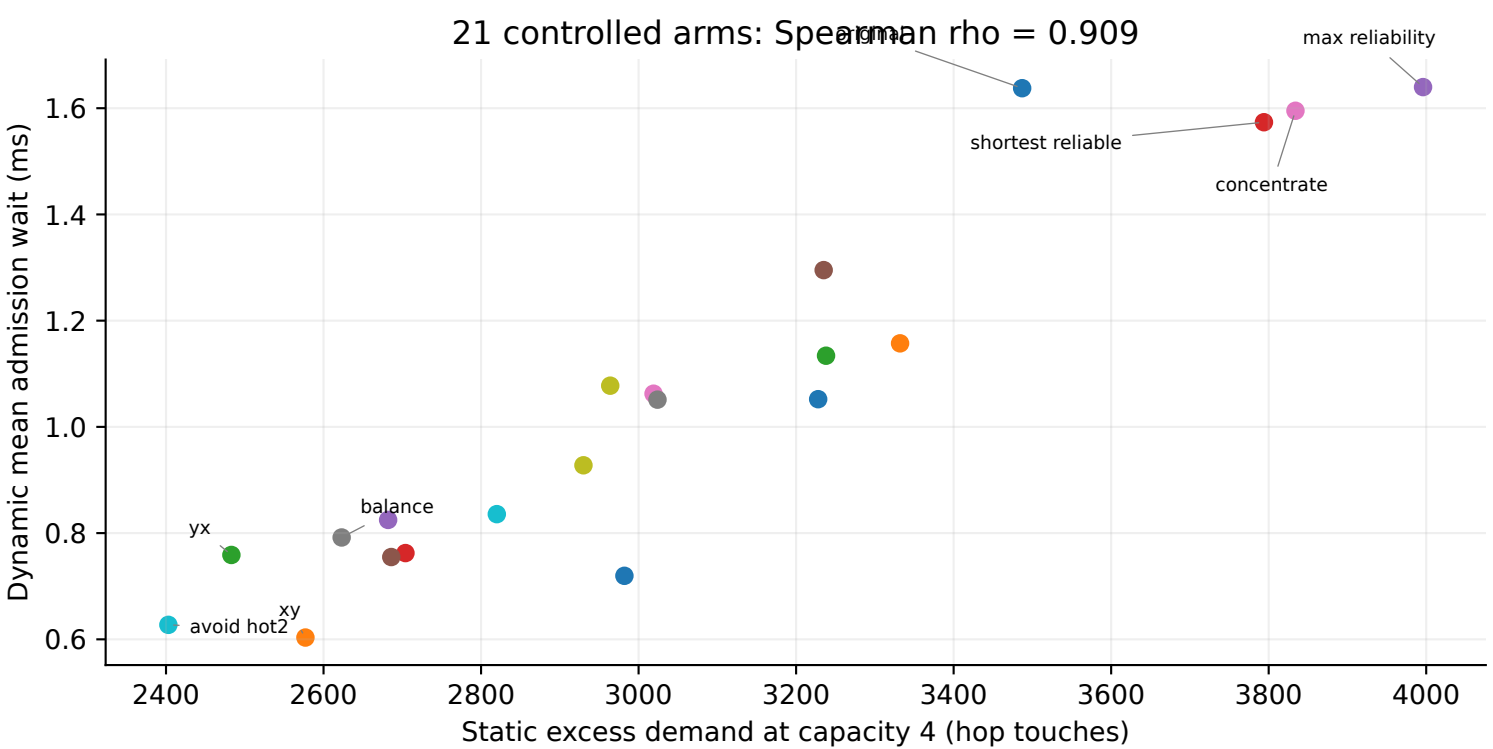
21 controlled arms: Spearman rho = 0.909
Dynamic mean admission wait (ms)
Static excess demand at capacity 4 (hop touches)
1.6
1.4
1.2
1.0
0.8
0.6
2400
2600
2800
3000
3200
3400
3600
3800
4000
arrival
max reliability
shortest reliable
concentrate
balance
yx
xy
avoid hot2