


corvi[®]
Corvi LED Light

Pursuit of
Efficiency

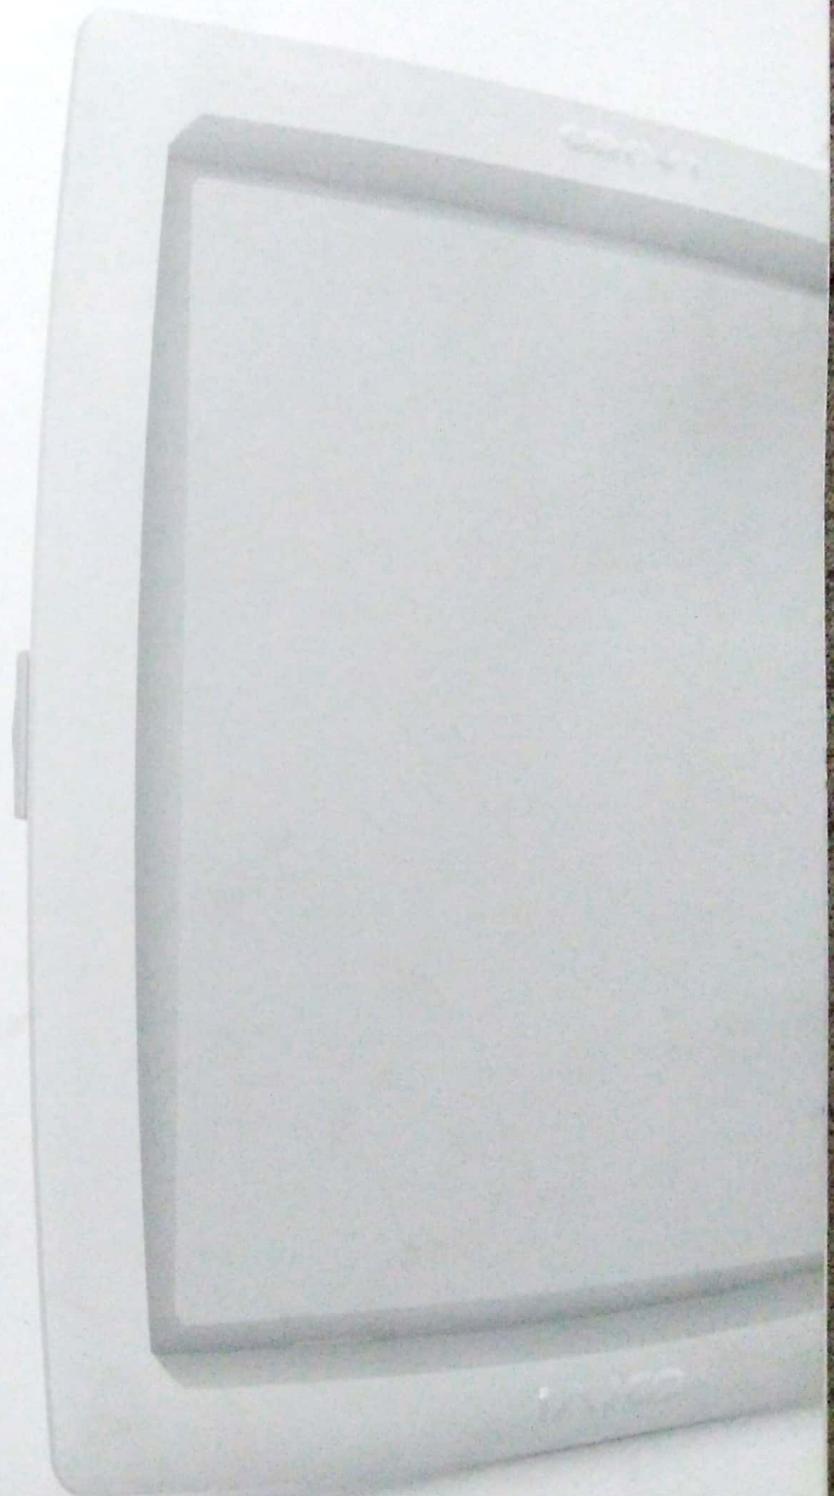

Dedicated to the pursuit of efficiency

Constant

The pursuit permeates all functions of the company. Everything that we do from designing a product to serving a customer, we strive for highest efficiency.


Continuous

Pursuit of efficiency is a dialectical process at Comvi. Every function is visited through an agile process and optimised based on:

- Availability of new technology
- New insights based on data

Change in paradigm

The underlying framework is guided by the principles of minimalism.

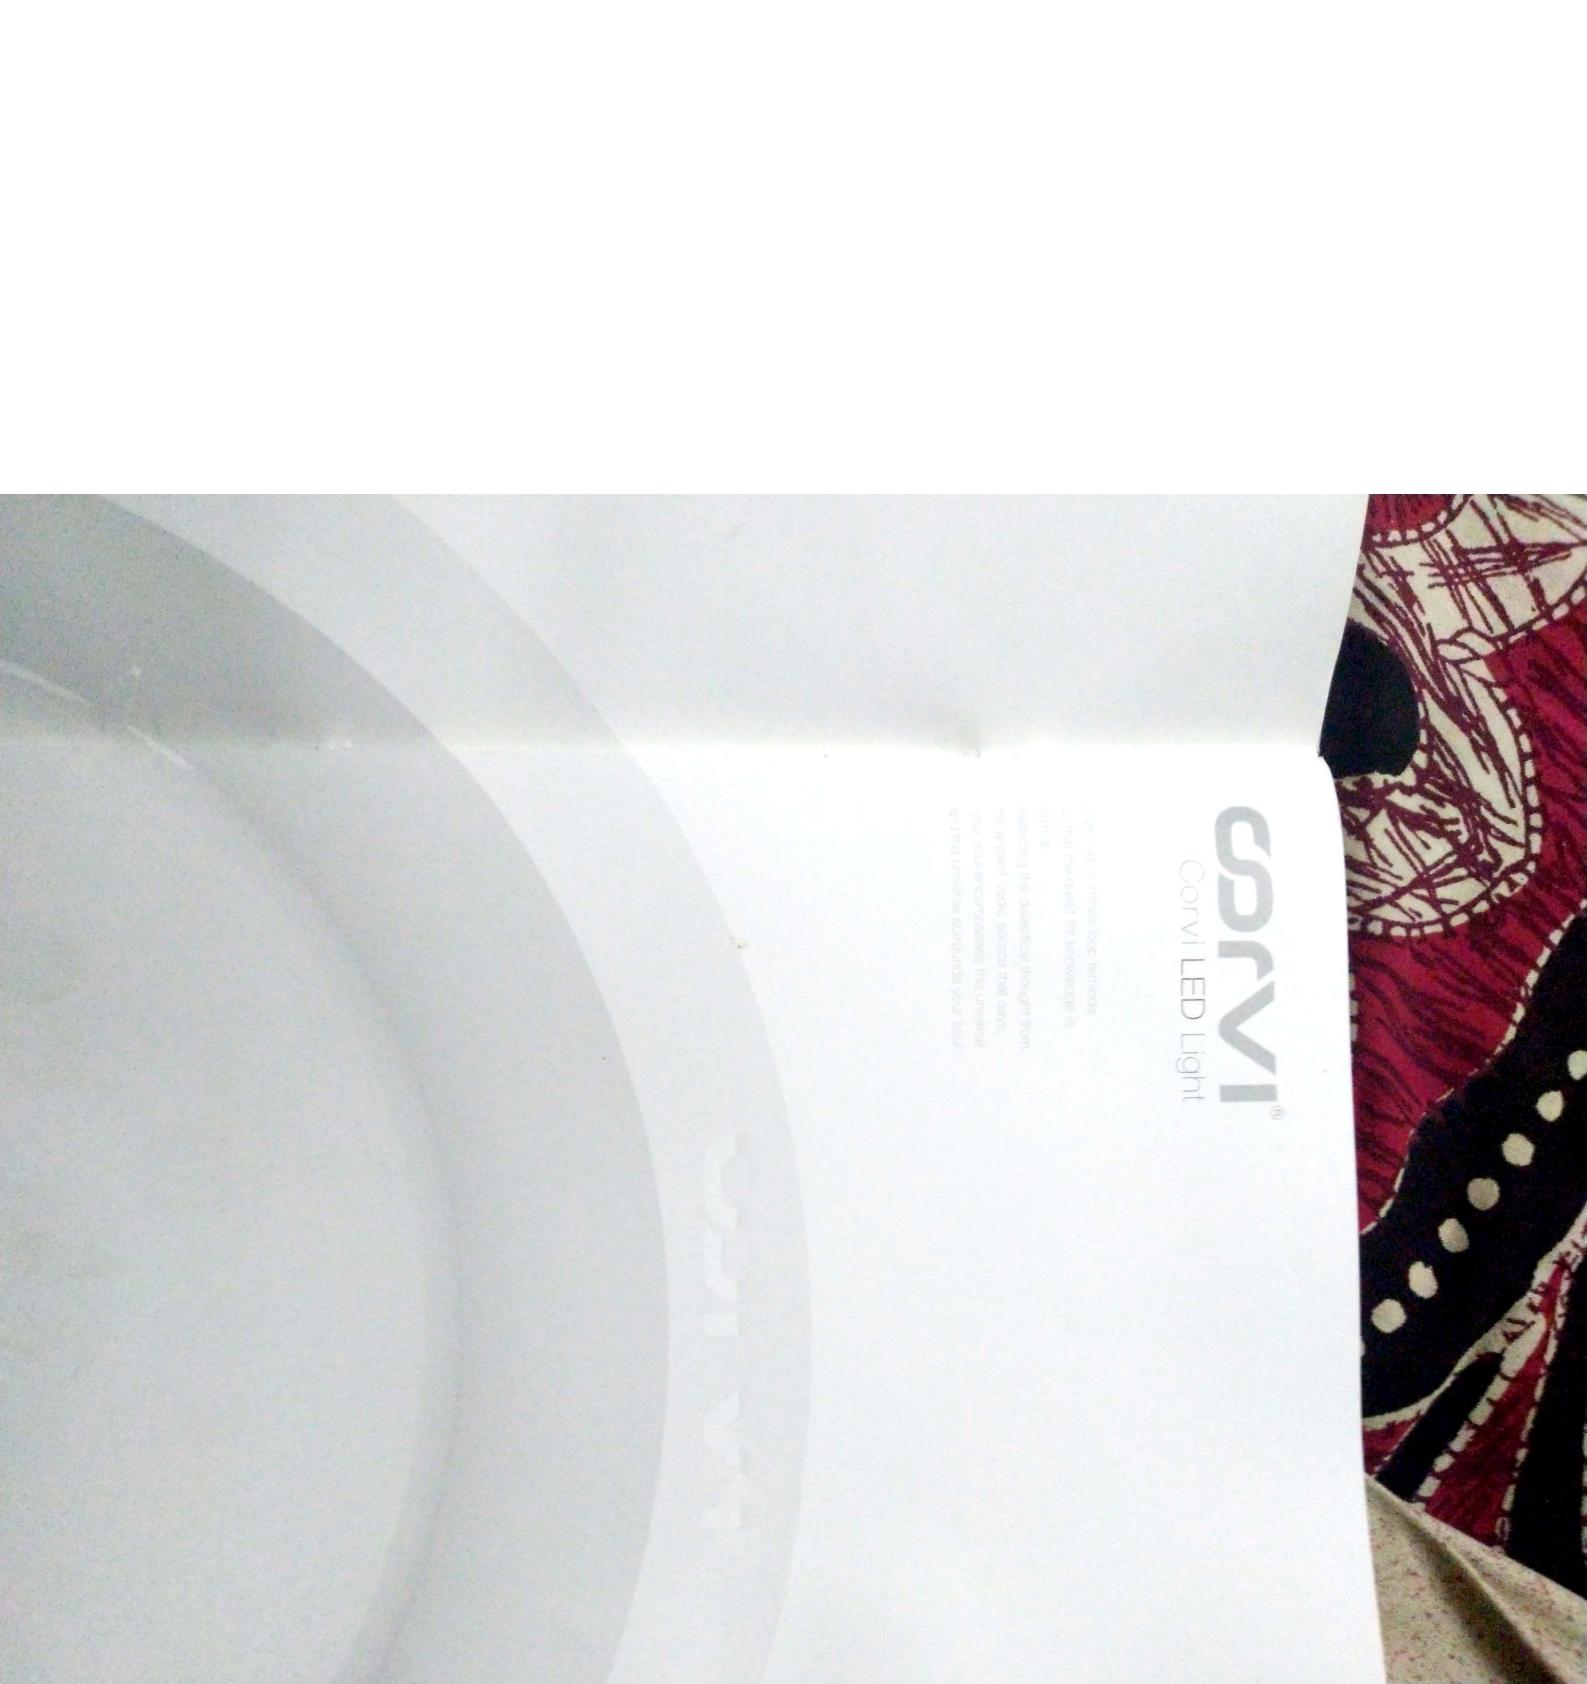

Corvi LED Light

...open up's infinite long moments
as you travel far knowledge is
stacked
against the tactical thought from
the ancient rock space that sits.
Your soul encompasses the universe
and the universe surrounds your soul.

Lifetime Warranty*

A standing testimony of our ability at Corvi

We underwrite our belief in delivering the finest product

Awards



reddot design award
winner 2016

Flat | Tube series



reddot design award
winner 2013

4 | 4S | Downlight 15



4S



Flat | Surface Series

Efficiency by Design

Minimalism

Efficiency is more than a company's ability to carry out its processes quickly and effectively. A process which is well-led by minimalist design, becomes the award-winning benchmark because the award is locality. A concern that is reflected in our processes and products too. A green approach, though challenging, it saves resources that are essential to tomorrow & money continues to satiate.

Industrialized Design

The design is highly customised to achieve standardisation, ensuring that every product conforms to stringent quality standards at a value-laden price.

Zero Maintenance

Safe-guarded design minimises the need for ongoing maintenance. High quality products through a systematic product life cycle.

Bulb

The tradition of fundamental disruption at Corvi reaches its epitome with the bulb.
The most important object of illumination stands redesigned.

Lifetime Warranty, 150 Lumens Per Watt
and the broadest illumination area lead
the feature list of this innovation
powerhouse called - The Bulb



1050 turns*

7 Watt

200 ~ 240V


Bulb = 25 gm

CRI > 80


Power Factor > 0.97

● 3000K ● 4000K

● 5700K

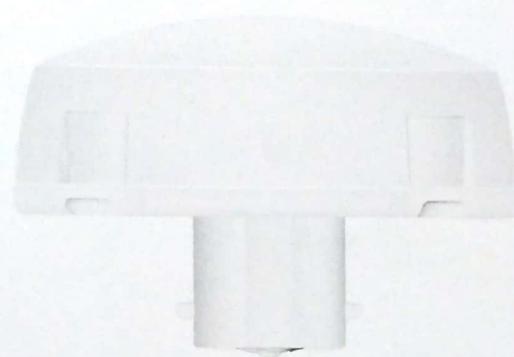



Bulb

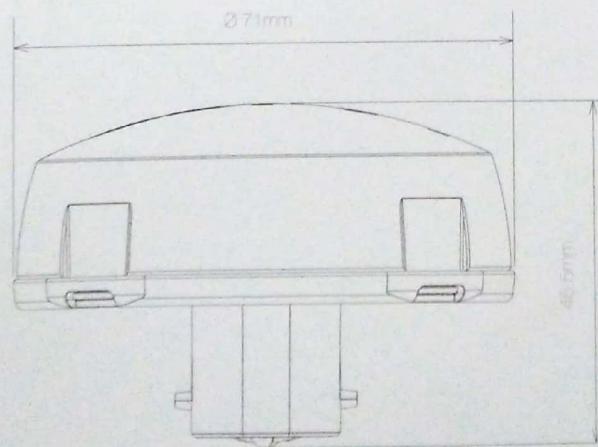



The Flat series manifests itself in a square grid round form. One of the most recessed luminaire here. The minimalist tone achieves sublime aesthetics. These beautiful products are superior in functionality. Up to 150 lumens of light output per watt. In-built driver & dimmable, are power features. Represent the only of its kind in the world.

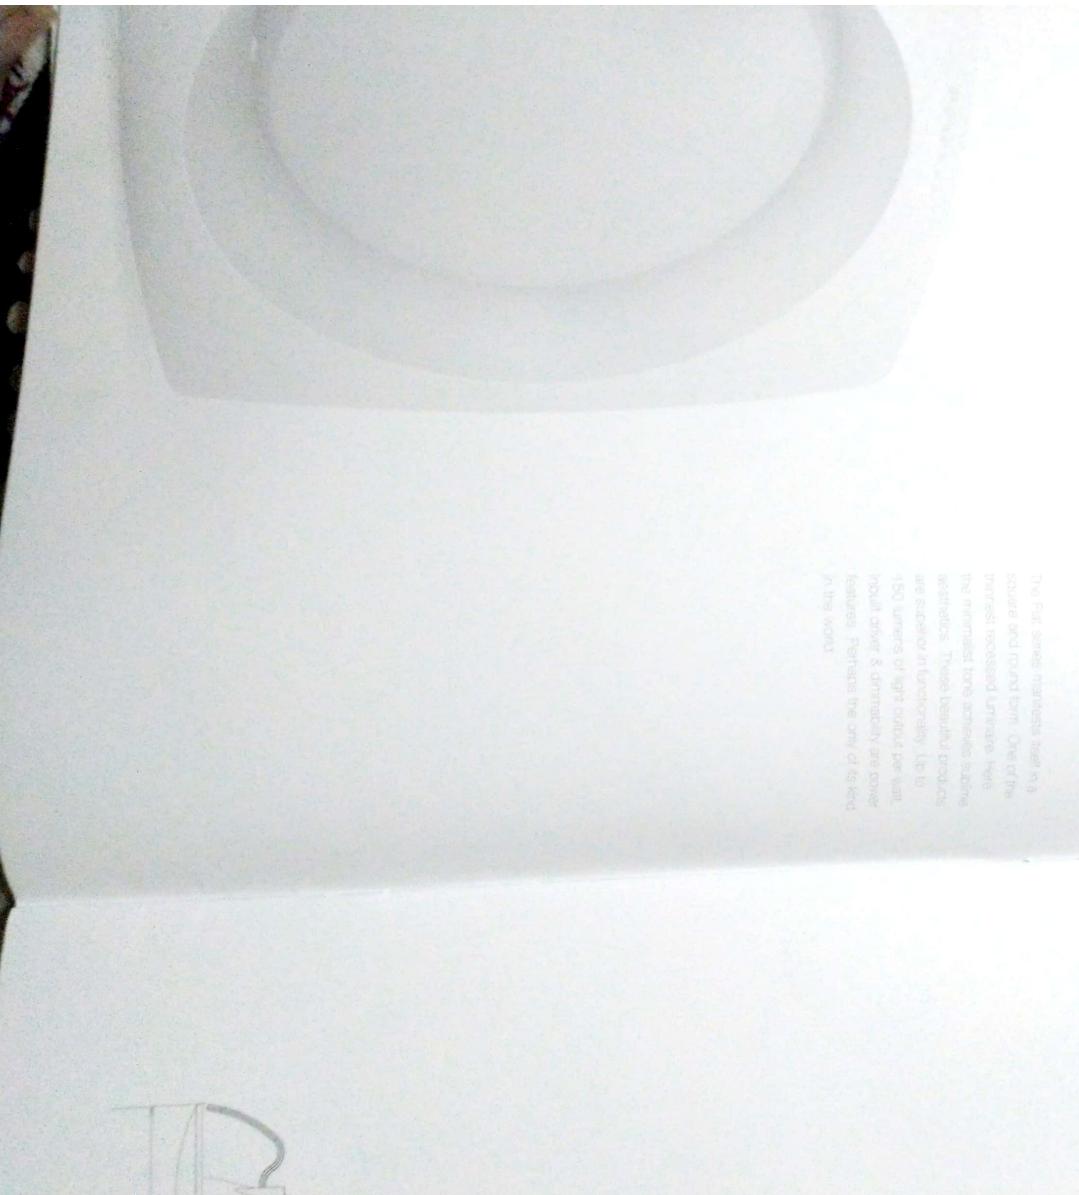

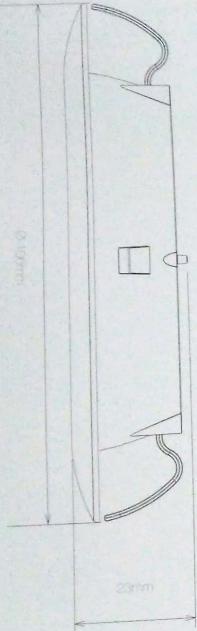

Flat 3



Ø190mm
Ø shaft
300 - 450N
300 - 270N
ØB = Ø190
Outer Circle = Ø197
SODI: 5400K
SODI: 5700K



300 lumens*

0.5 Watt

200 - 240V

Flat 4 - 51 gm / 40 - 53 gm

CRI > 80


IP - 53

Power Factor > 0.97

● 3000K ● 4000K ● 5700K



Flat 4

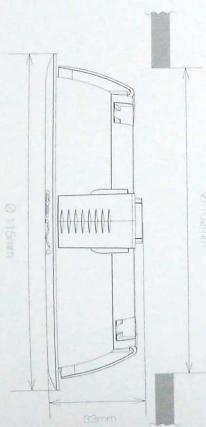

Flat 6



Flat 6Q



reddot design award
winner 2016



Flat 4Q



0.98 ± 0.00001

0.05 ± 0.01

0.03 ± 0.00001

0.00 ± 0.00001

0.00 ± 0.00001

0.00 ± 0.00001

Power Factor = 0.97

3000K  4000K  5700K 



Flat 8

3000K warm*

20 Watt

200 - 240V

100 BD 214 JN

CRI > 80



IP: L3


Power Factor > 0.97

3000K ● 4000K ● 5700K



Flat 8Q

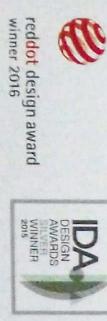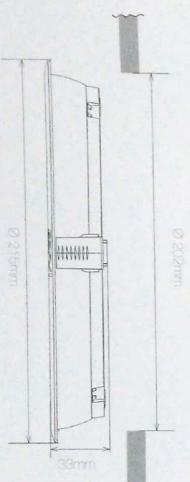

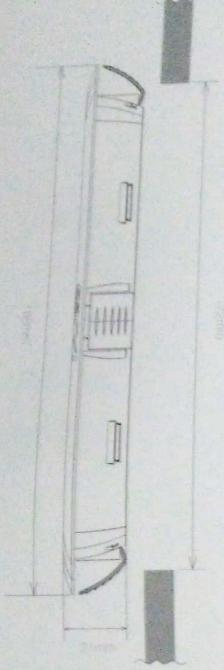


Flat 6S



● 3DOK
● 4DOK
● 5DOK



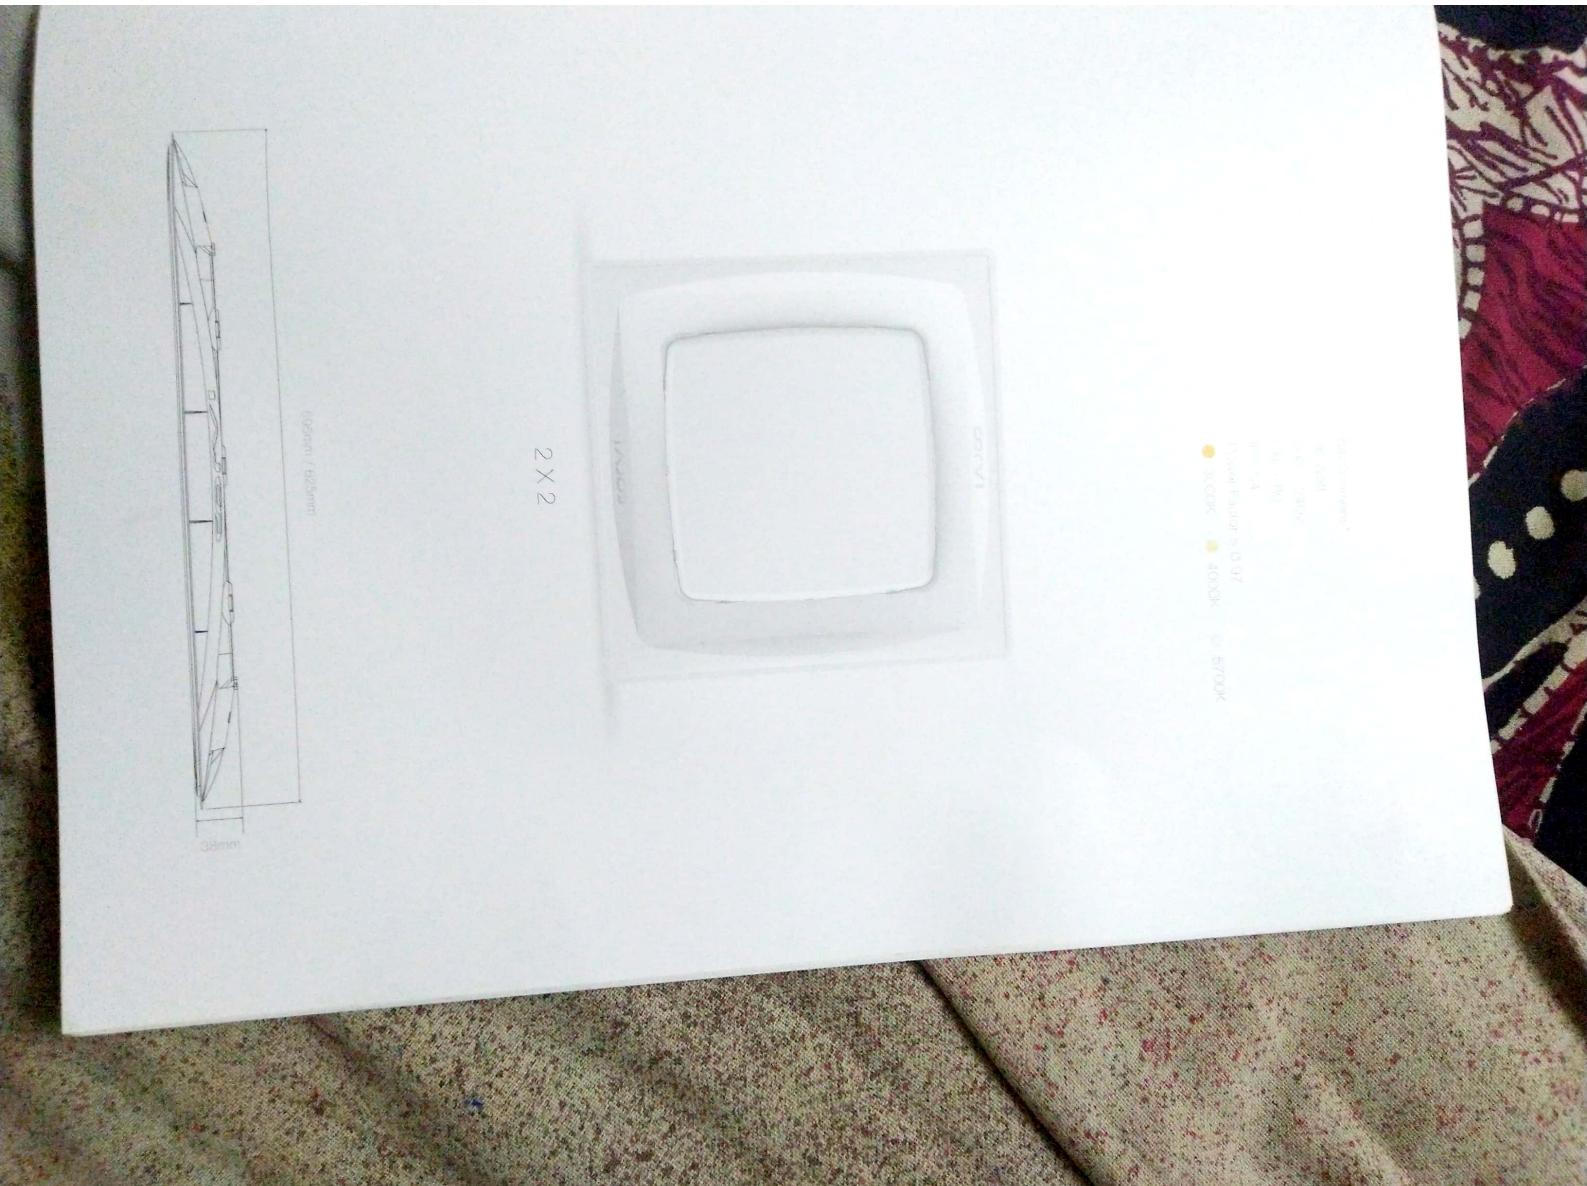


Surface

The Surface series maintains itself in a consolidated form. Its simplicity lies in the design prowess where all lights have a simple plug in bayonet fitting. Up to 150 lumens of light output per watt, multi-level driver dimmability across the range are power features.




Surface 4

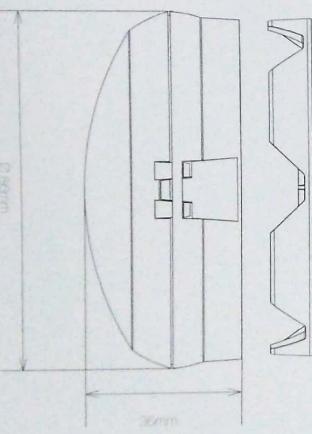

Surface 4



900 lumens*
6 Watt
200 – 240V
Surface 4 – 48 gm
CRI > 80
IP ~43
Power Factor > 0.97
3000K
4000K
5700K

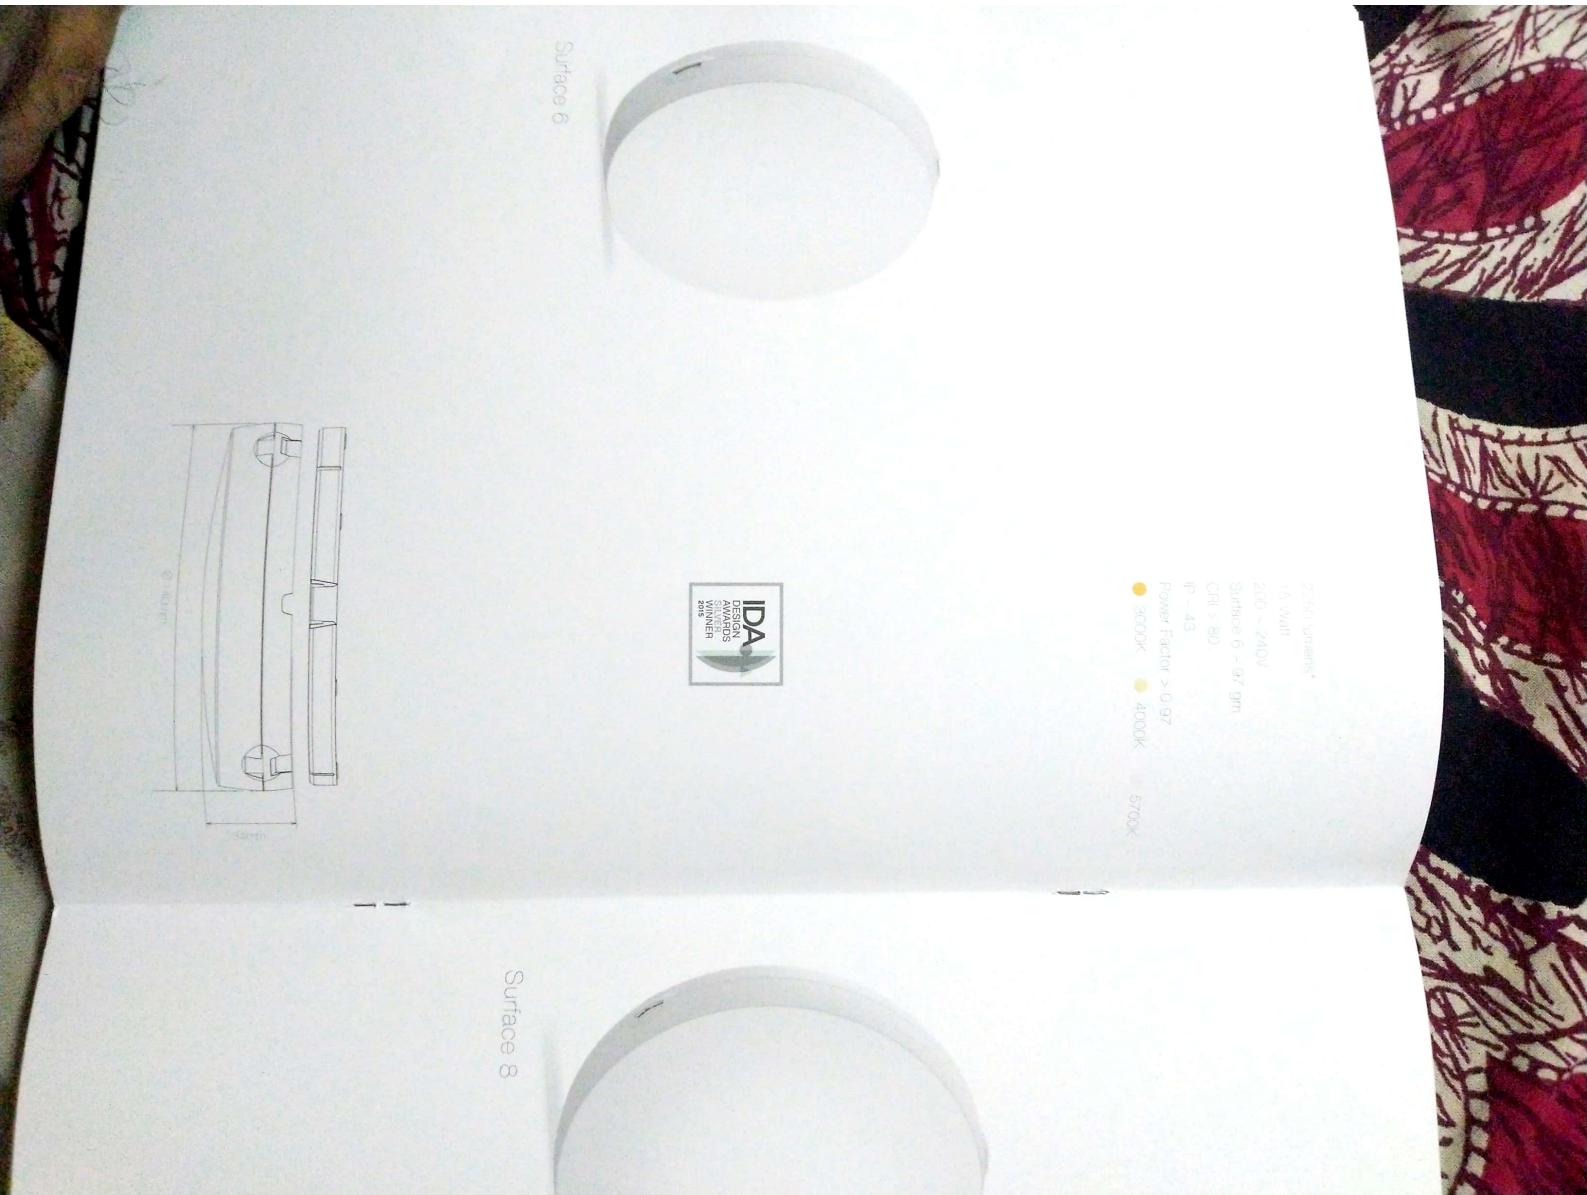

8000 Lumen

15 W

200 - 240V

Surface B - 210 mm

G9x8D

φ = 43

Power Factor > 0.97

300K


4000K


5000K

6000K



Surface B

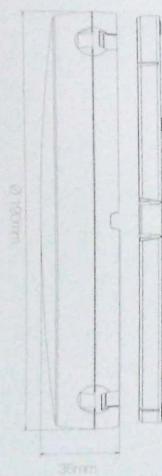

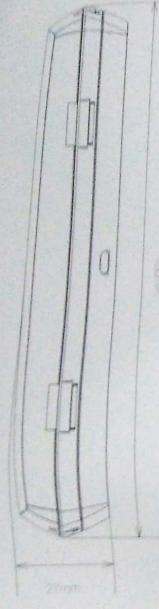

Surface 6S




Microsoft Surface 6S
Dimensions:
Width: 27.0mm
Height: 19.0mm
Thickness: 0.8mm
Weight: 360g

8400 lumens*
36 Watt
200 - 240V
CRI > 80
Power Factor > 0.97
● 3000K ● 4000K ● 5700K



Surface 15S

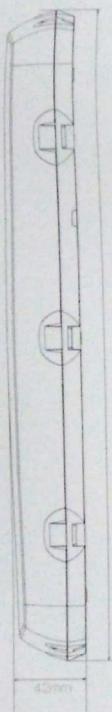

Tube

Tube 2

Tube 1

T4

T2

T5

T1 : 800 lumens

12W

200 ~ 240V
OPi > 80
Power Factor > 0.97

3000K

4000K

5000K



T2 : 1800 lumens | 12 Watt | 61.5 gm




reddot design award
winner 2016



T4 : 800 lumens | 120 Watt | 99 gm



Tube 15W : 2260 lumens | 15 Watt | 70 gm

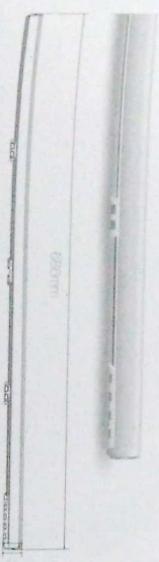

Tube 20W : 3000 lumens | 20 Watt | 90 gm




...but you're not
alone. In fact, you're part
of a massive, global community
of people who share your passion
for travel. And we're here to help.
We offer a wide range of services,
from travel planning and booking
to destination guides and
travel tips. So whether you're
planning a trip or just looking
for inspiration, we've got you
covered.



Travel
Community





Spot 3

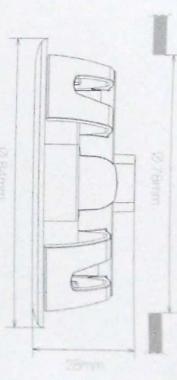

Spot 3D (Deep recessed)



Spot 30

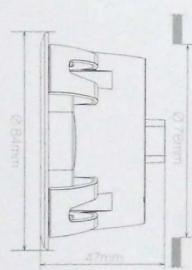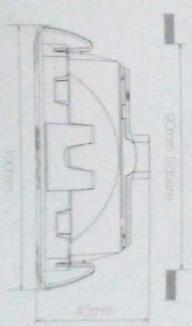

900 lumens*

6 Watt

200 - 240V

CRI > 80

IP - 53

Power Factor > 0.97

3000K ● 4000K ○ 5700K

900 lumens*

6 Watt


200 - 240V

CRI > 80


IP - 53

Power Factor > 0.97


● 3000K ● 4000K ○ 5700K

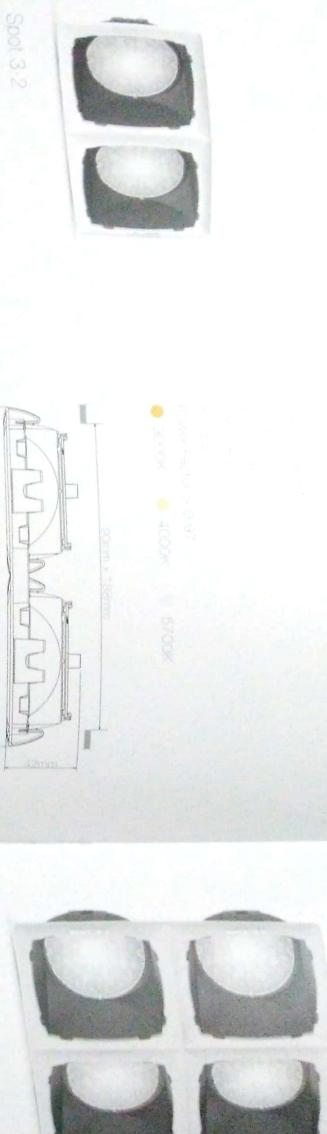


Spot 3-2x2

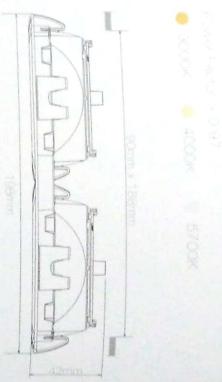


Spot 3-2x2

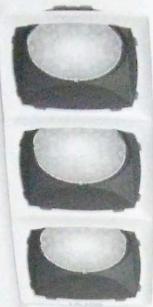


Spot 3-3

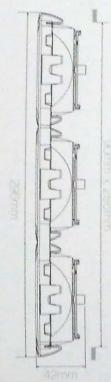

Spot 3-3

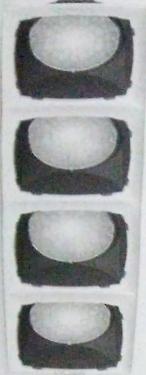

Spot 3-4



Spot 3-4




Honeycomb Grid


Honeycomb Grid (Optional)




Spot 3 Surface

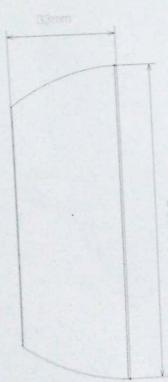

Spot 3-2X2

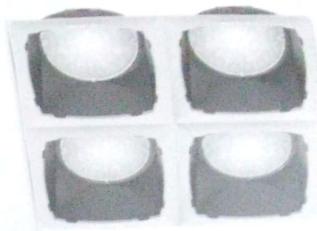

- 3000K ● 4000K ● 5700K

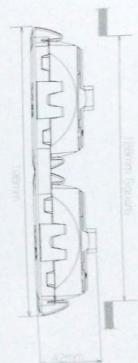

3000K

4000K


5700K

High-Bay

The unique design allows for a lamp-like mechanism where multiple units of High-Bay can be easily attached to get the desired scale. Such a system remains yet to be seen. One High-Bay is built to provide normal functionality. Light management coupled with this, CRI depicts our respect for the human element.



HB50

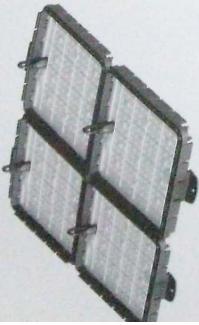

Linkable



Linkable



Linkable



nB50



7600 lumens*

50 Watt


200 ~ 240V

CRI > 80

IP - 67

Power Factor > 0.97

- 3000K
- 4000K
- 5700K

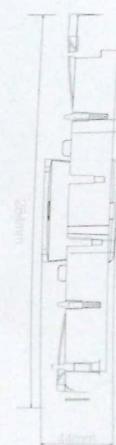

15000 lumens*

100 Watt


200 ~ 240V

CRI > 80

IP - 67

Power Factor > 0.97

- 3000K
- 4000K
- 5700K

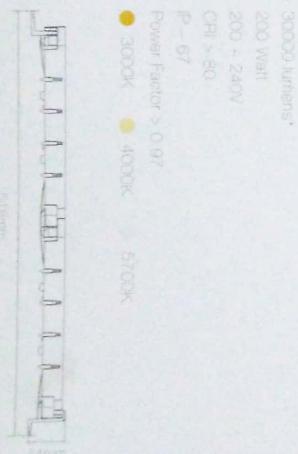



Street light

Streetlight uses signature thermal management of Corvi. The ubiquitous metal heat sink has been taken away from the equation.


A consolidated design with innovative beam angle management allows for a broader illuminated area. High efficacy of 150 lumens per watt coupled with Lifetime Warranty* provides unbeatable value. Its self-contained design results in Zero Operational Maintenance.



SL25

3750 lumens*
25 Watt
200 – 240V
50, 25 + 200 lm/W
CRI > 80
IP – 67
Power Factor > 0.97


● 3000K ● 4000K ● 5700K

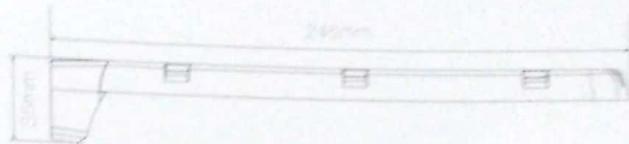

SL50

7600 lumens*
50 Watt
200 – 240V
CRI > 80
IP – 67
Power Factor > 0.97


● 3000K ● 4000K ● 5700K

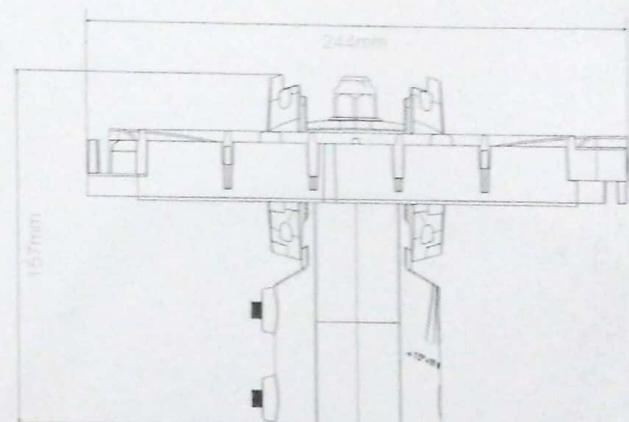

Linkable

15000 lumens*
100 Watt
200 – 240V
CRI > 80
IP – 67
Power Factor > 0.97

● 3000K ● 4000K ● 5700K

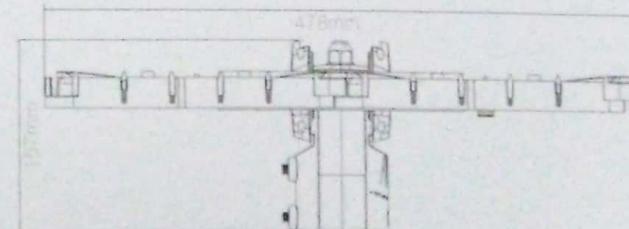

Outdoor

Functional aesthetics achieve its true meaning with Corvi outdoor products. An apparent duality is intertwined to serve both sides of the equation. The luminaire itself is an object of beauty, designed to illuminate the desired subject in the most beautiful manner.

After all the outdoor light is a part of the landscape itself.



FL25



Spot 3S




Spot 3O




FL25

9750 lumens*
25 Watt
200 ~ 240V
CRI > 80
IP - 67
Power Factor > 0.97
● 3000K ● 4000K ● 5700K

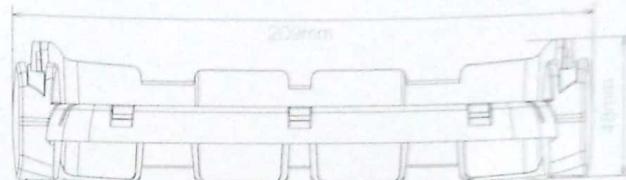

Spot 3S

900 lumens*
6 Watt
200 ~ 240V
CRI > 80
IP - 67
Power Factor > 0.97
● 3000K ● 4000K ● 5700K

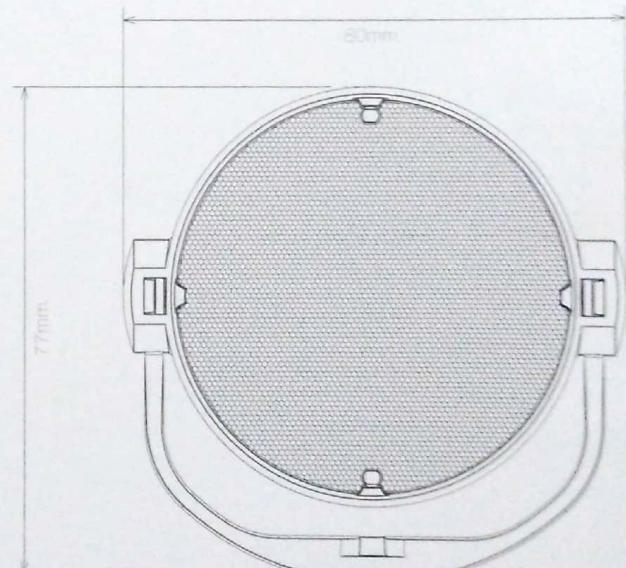

Spot 30



Honeycomb Grid (Optional)

Standard Features



Model	Wattage	Light Output (lumens*)	Dimension (mm)
Bulb	7	1050	271 x 46.5
Flat 3	7	900	Ø106 x 23
Flat 4	6	900	Ø115 x 33
Flat 4Q			115 x 115 x 33
Flat 6	15	2250	Ø165 x 33
Flat 6Q	20	3000	165 x 165 x 33
Flat 6S	15	2250	188 x 188 x 21
2x2	36	5400	595 x 595 x 38 / 625 x 625 x 38
Surface 4	6	900	Ø86 x 36
Surface 6	15	2250	Ø140 x 34
Surface 8	20	3000	Ø190 x 36
Surface 6S	15	2250	160 x 160 x 27
Surface 15S	36	5400	395 x 395 x 42
T1	6	900	250 x 19 x 16
T2	12	1800	500 x 19 x 16
T4	20	3000	1000 x 19 x 16
Tube 15W	15	2250	686 x 24 x 26
Tube 20W	20	3000	911 x 24 x 26
Spot 3	6	900	Ø84 x 28
Spot 3D			Ø84 x 47
Spot 3Q			100 x 100 x 42
Spot 3-2	12	1800	198 x 100 x 42
Spot 3-3	18	2700	296 x 100 x 42
Spot 3-4	24	3600	394 x 100 x 42
Spot 3-2x2	24	3600	198 x 198 x 42
Spot 3 Surface	6	900	Ø90 x 33
HB50	50	7500	284 x 245 x 44
HB50 - 2 (Linkable)	100	15000	478 x 259 x 44
HB50 - 4 (Linkable)	200	30000	478 x 518 x 44
SL25	25	3750	246 x 149 x 35
SL50	50	7500	244 x 353 x 157
SL50 - 2 (Linkable)	100	15000	478 x 353 x 157
FL25	25	3750	209 x 200 x 48
Spot 3S	6	900	80 x 203 x 22
Spot 3Q			80 x 77 x 22



CorVI®
Corvi LED Light

©2014 Corvi LED Light LLC. All rights reserved. Corvi LED Light is a registered trademark of Corvi LED Light LLC.

corvilight.com • [CorviLight](#) • [CorviLight](#) • [CorviLight](#)