


# TELNET

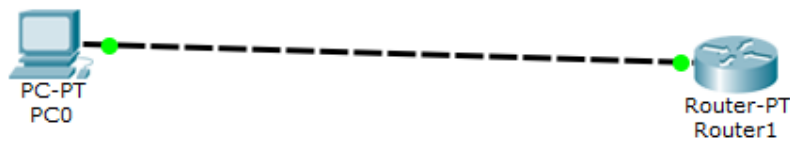

```
Router1
Physical Config CLI
IOS Command Line Interface
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Continue with configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Continue with configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Continue with configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#config terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#hostname r1
r1(config)#enable secret pl
r1(config)#interface fastethernet 0/0
r1(config-if)#ip address 10.0.0.1 255.0.0.0
r1(config-if)#no shutdown
r1(config-if)#no shutdown
^
% Invalid input detected at '^' marker.
r1(config-if)#no shutdown
```

Copy Paste

