

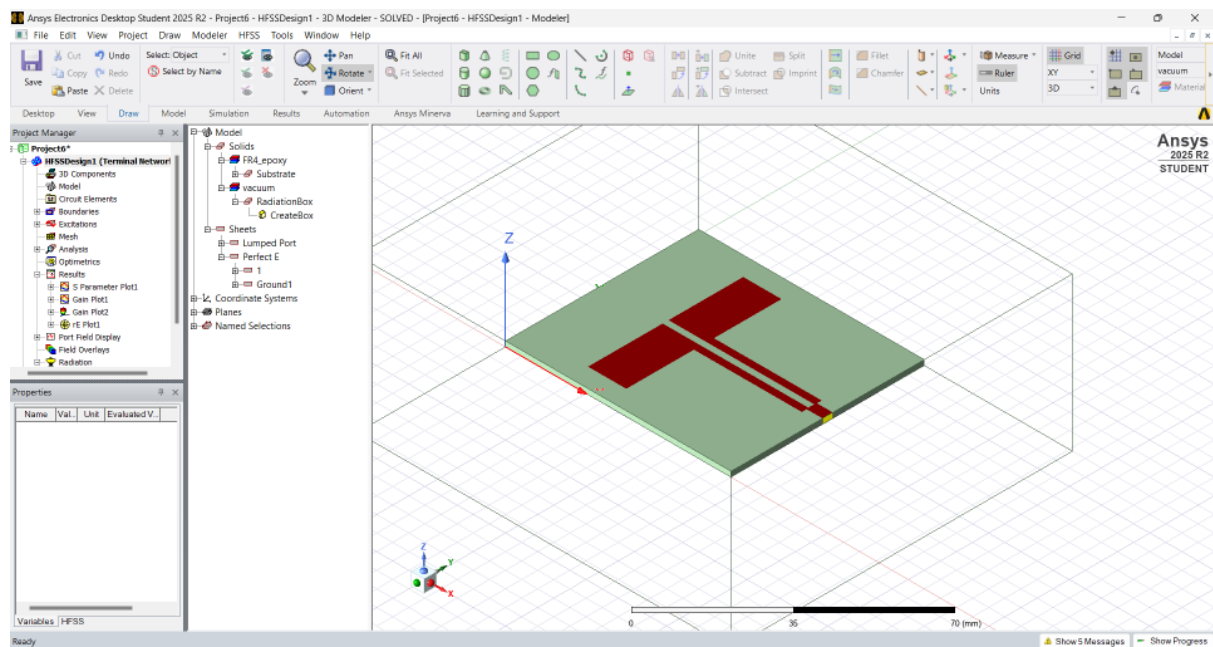


Design of Dual-Band T-Shaped, U-Shaped and H-Shaped Microstrip Antennas for Wireless Applications


1. Design of T-shape Antenna.

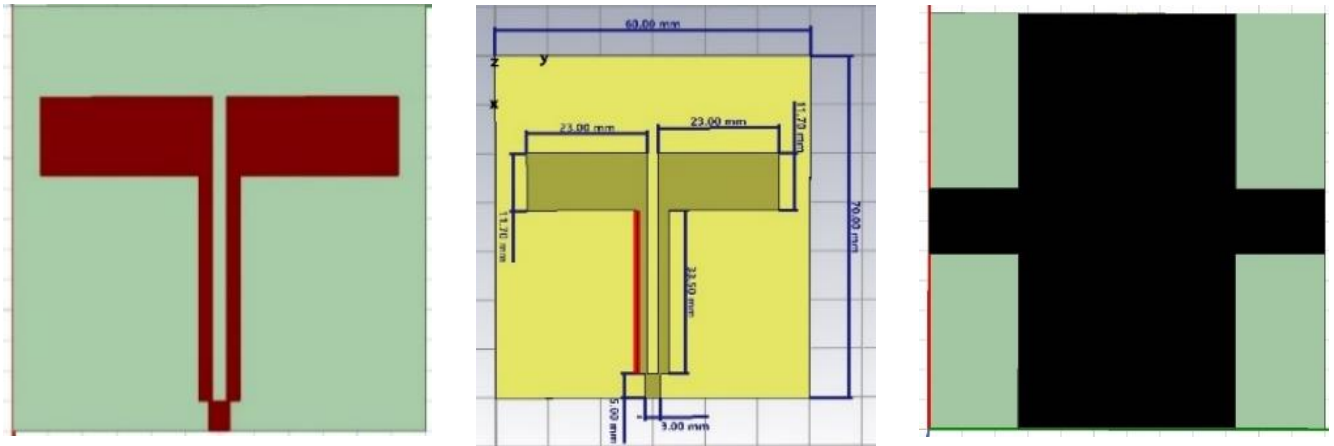

2.S(1,1) Parameter Plot.

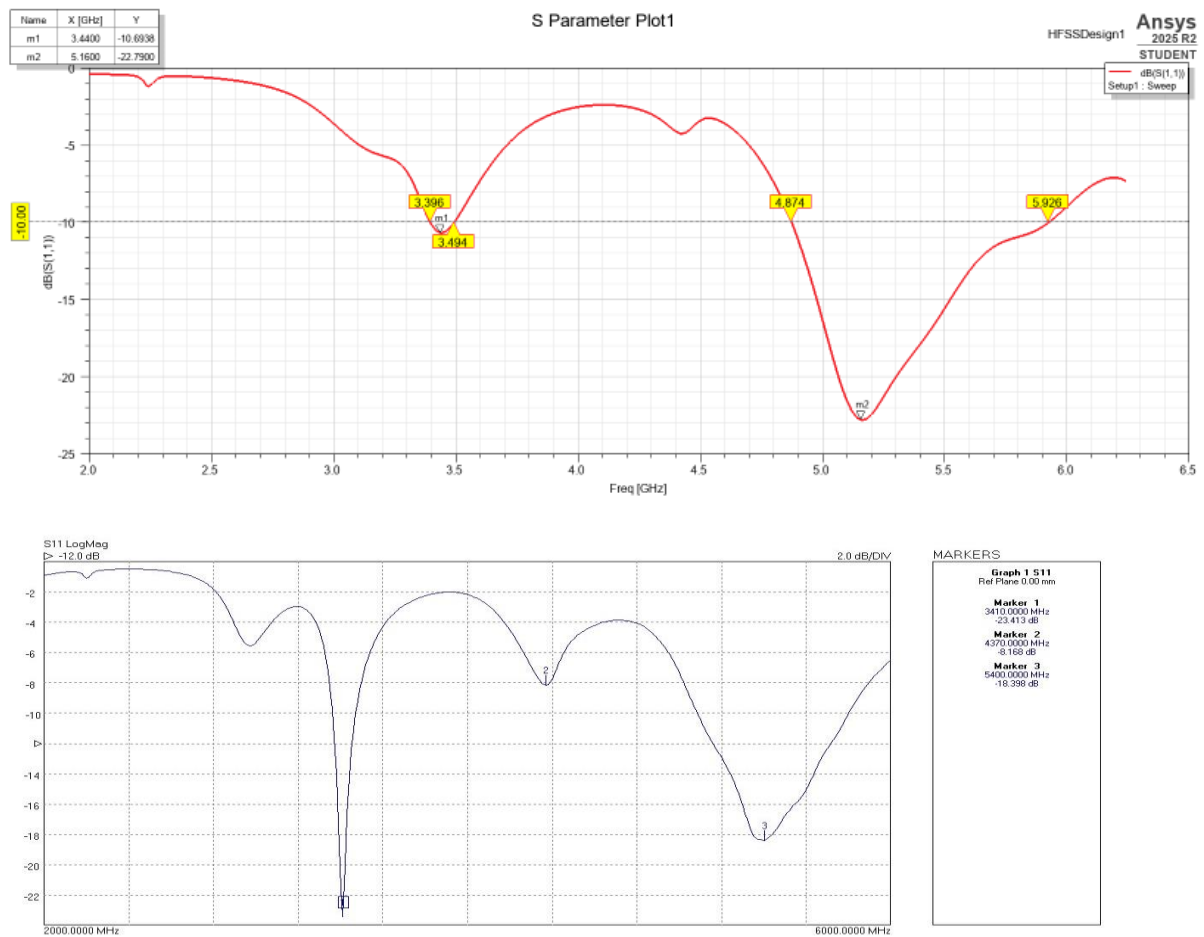

3. Radiation Pattern.

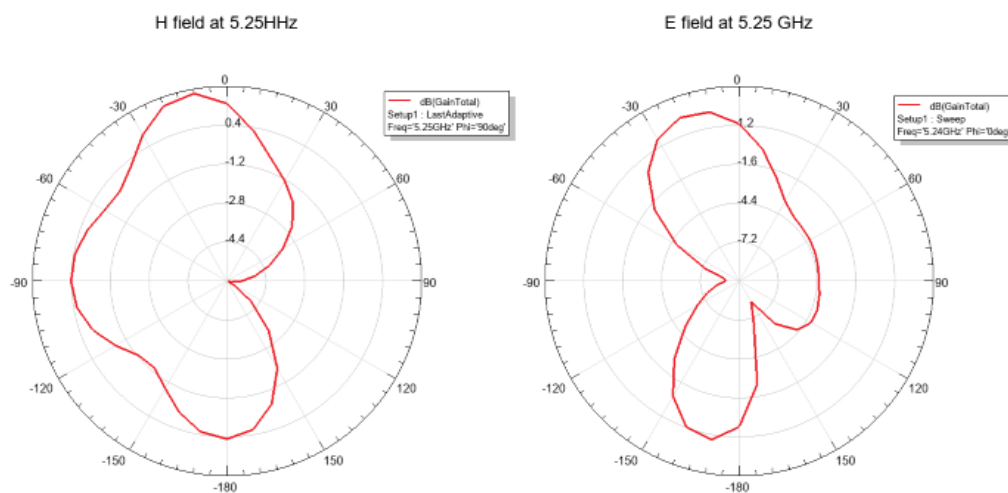


4. Gain Analysis.

Ansys Inc.




Gain Plot4



Ansys
2025 R2
STUDENT

4. VSWR & Smith Charts:

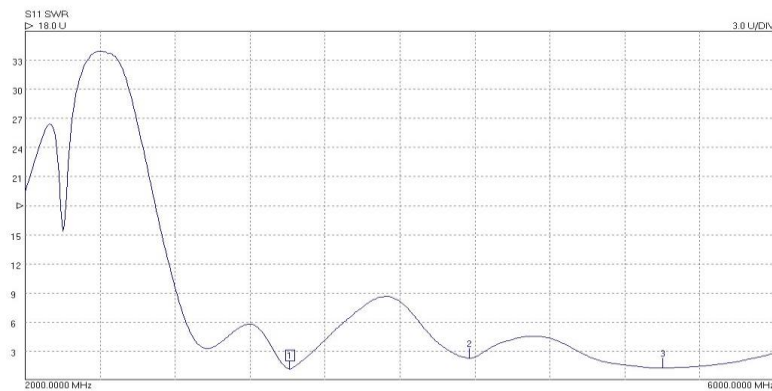


MARKERS

Graph 1 S11
Ref Plane: 0.00 mm

Marker	Freq (MHz)	SWR
Marker 1	3410.0000	1.144 U
Marker 2	4370.0000	2.279 U
Marker 3	5400.0000	1.281 U

S11 Reflection Z




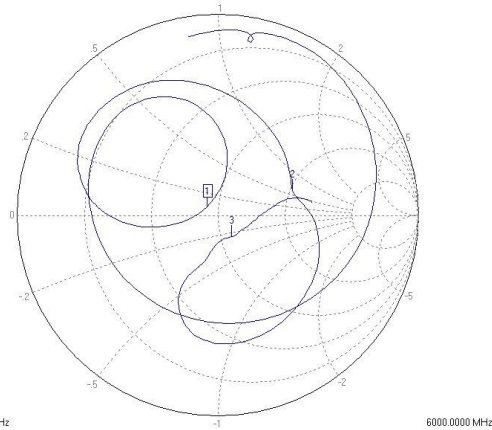


MARKERS


Graph 1 S11
Ref Plane: 0.00 mm

Marker	Freq (MHz)	SWR	Gamma (dB)
Marker 1	3410.0000	1.144 U	44.532, 3.973 U, 185.43pH
Marker 2	4370.0000	2.279 U	102.704, 20.289 U, 1.10nH
Marker 3	5400.0000	1.281 U	95.012, -11.808 U, 2.50pF


1. Design of U-shape Antenna.

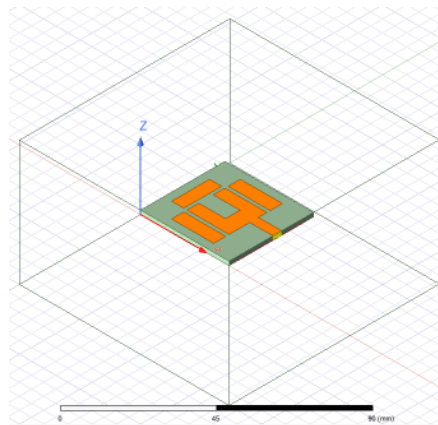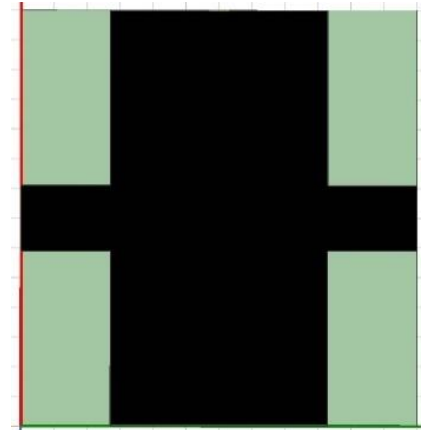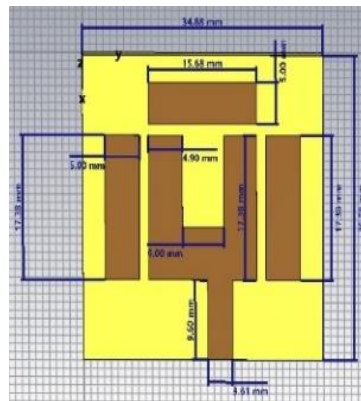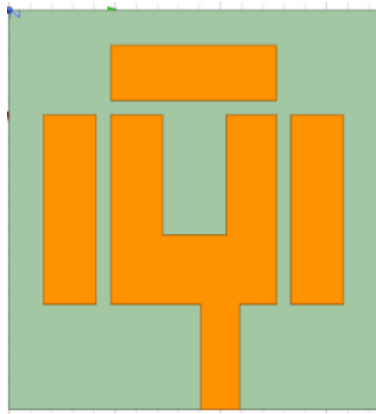


2.S(1,1) Parameter Plot.

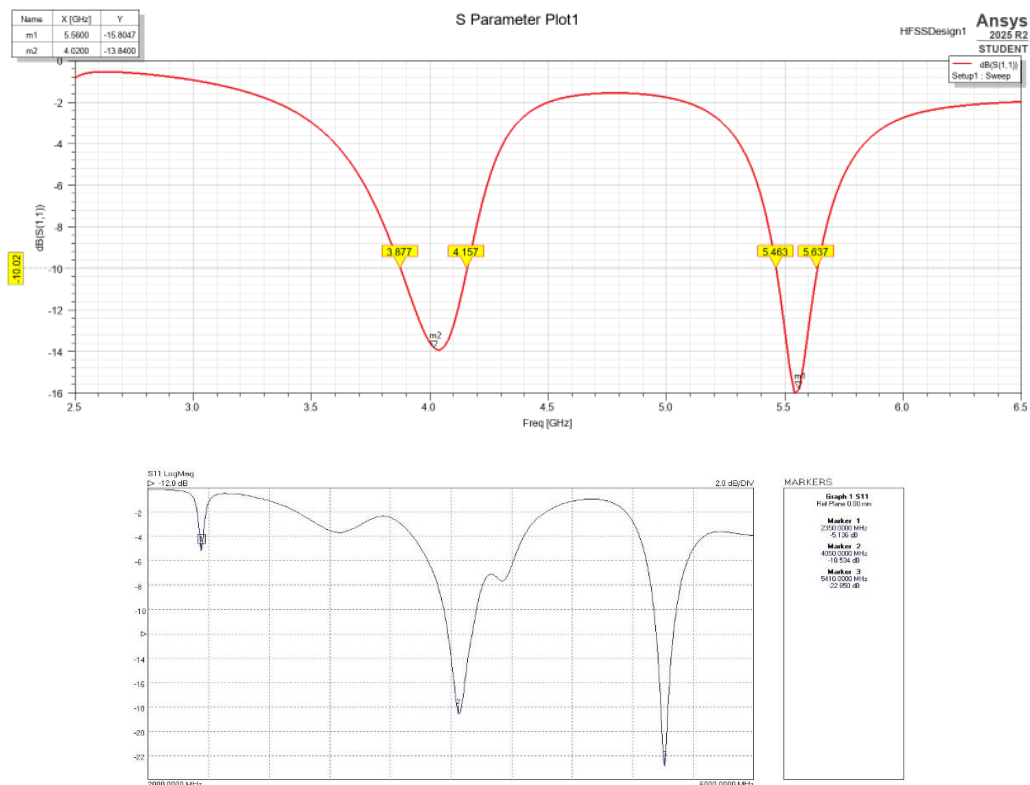


3. Radiation Pattern.

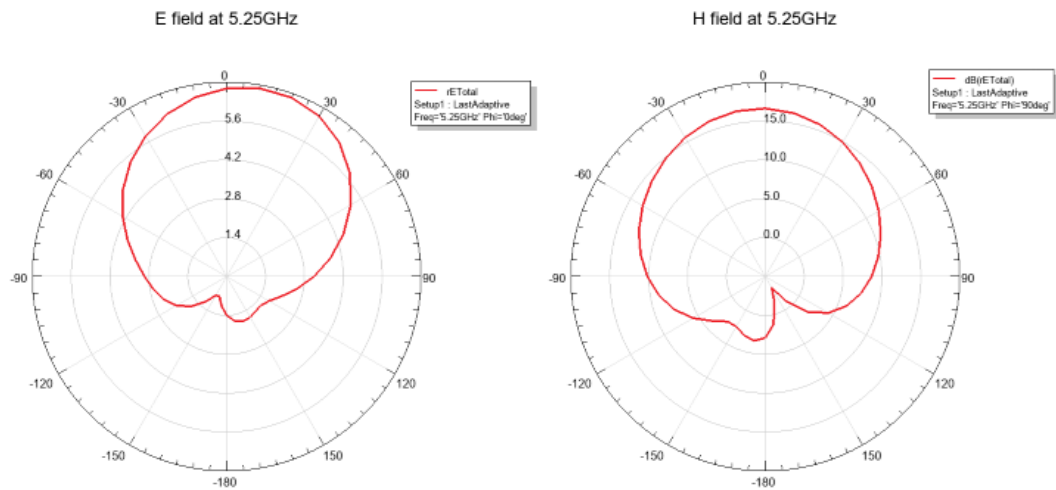


4. Gain Analysis.

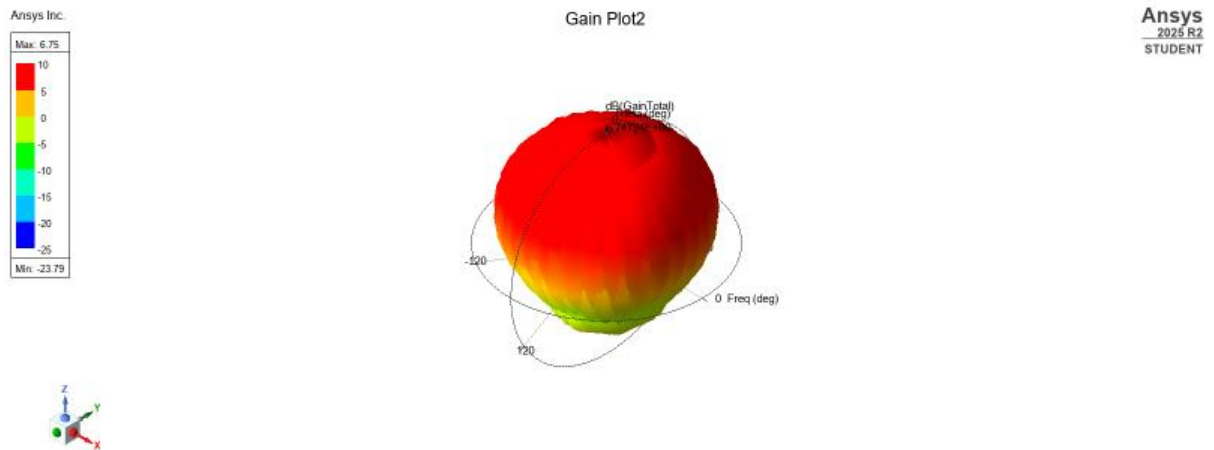

4. VSWR & Smith Charts:

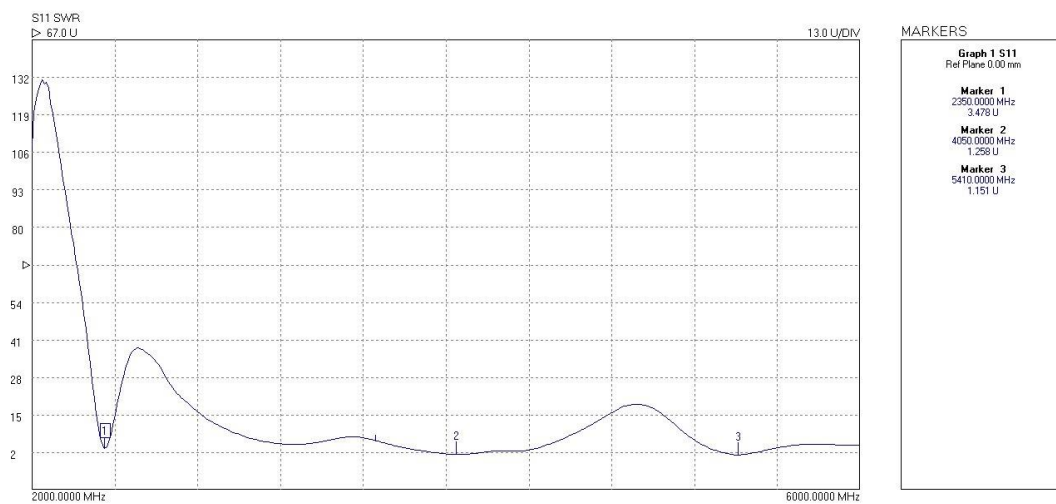

S11 Reflection Z

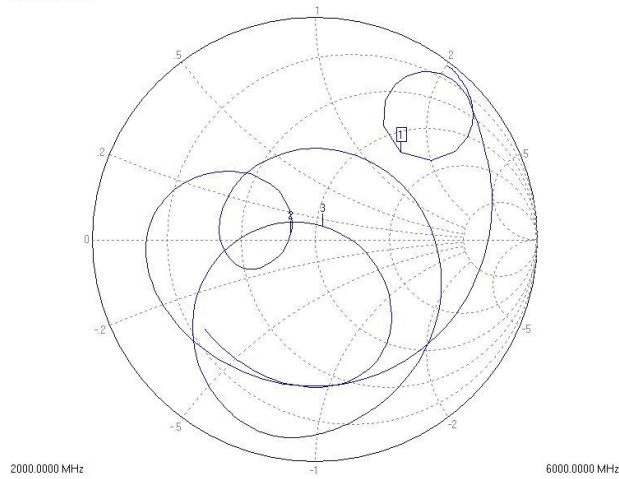

MARKERS





Graph 1 S11
Ref Plane 0.00 mm

Marker 1
2350.0000 MHz
64.816, 74.167°, 5.02dB



Marker 2
4750.0000 MHz
40.014, 2.482°, 97.54dB

Marker 3
5410.0000 MHz
53.042, 6.575°, 193.43dB


1. Design of H-shape Antenna.

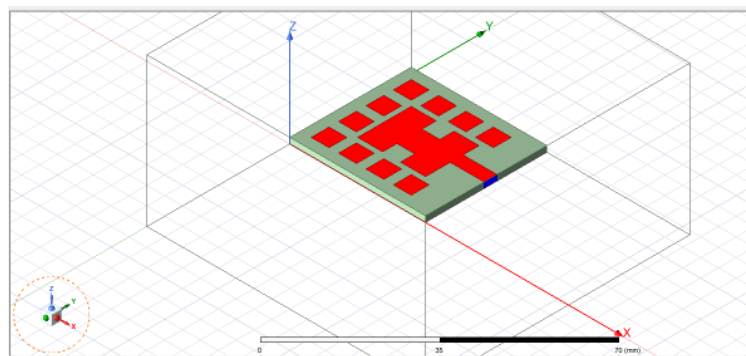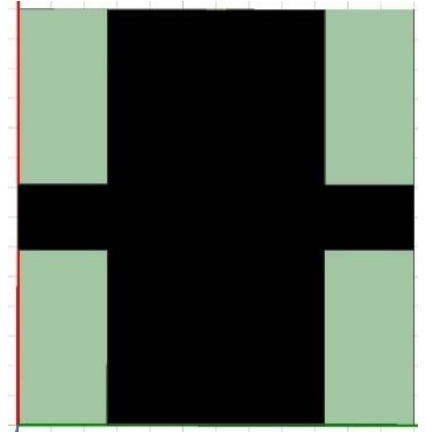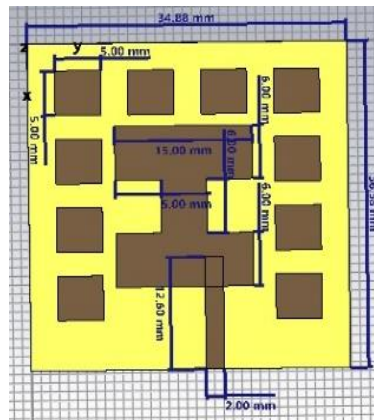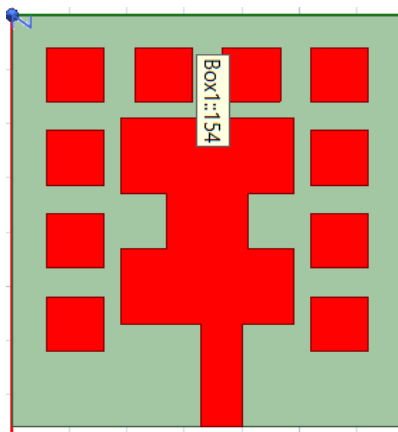

2.S(1,1) Parameter Plot.

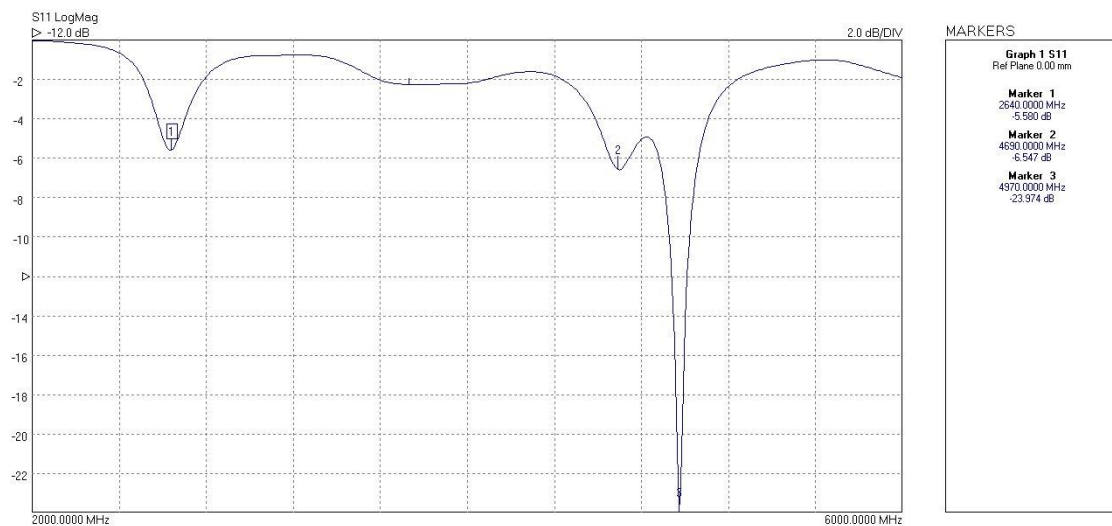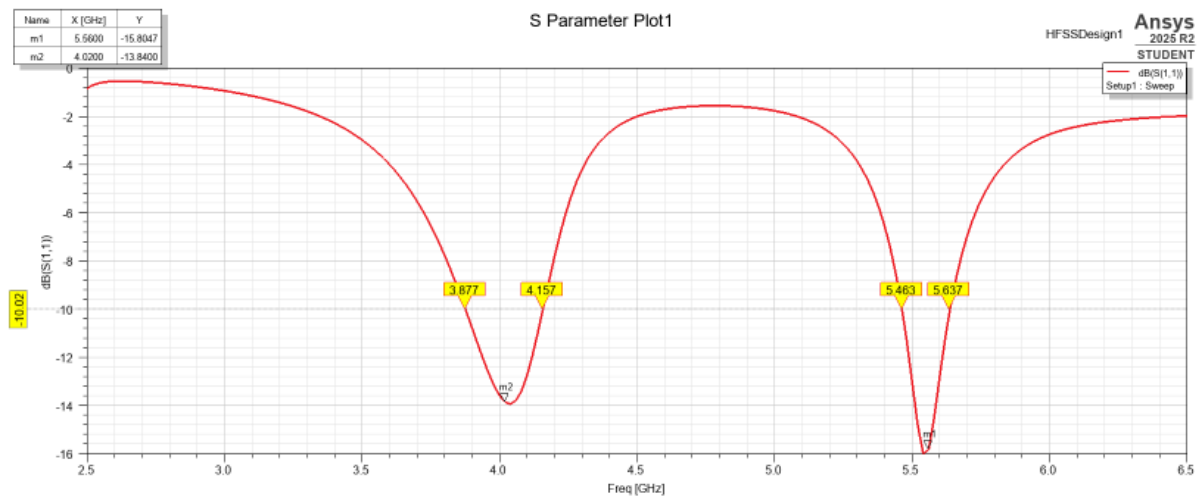


3. Radiation Pattern.

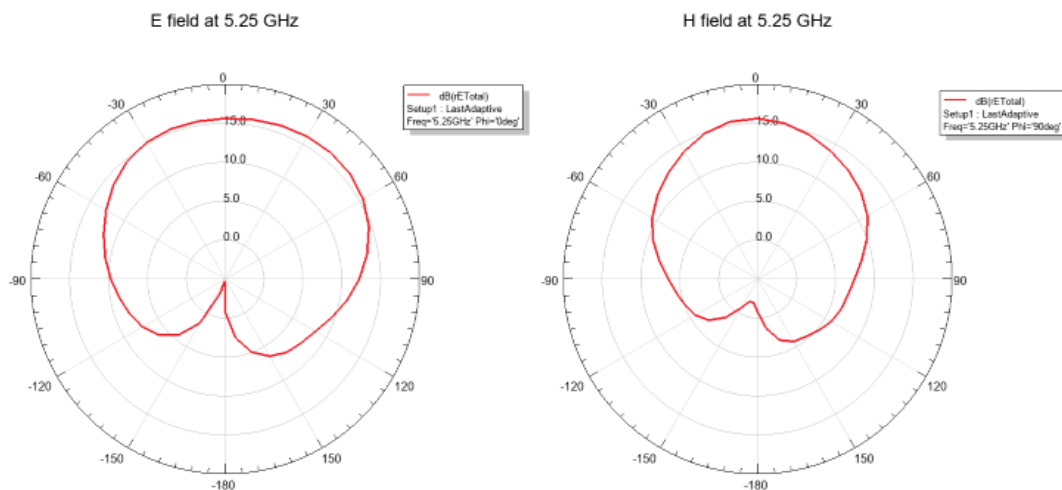


4. Gain Analysis.

Ansys Inc.




Gain Plot1



Ansys
2025 R2
STUDENT

4. VSWR & Smith Charts:

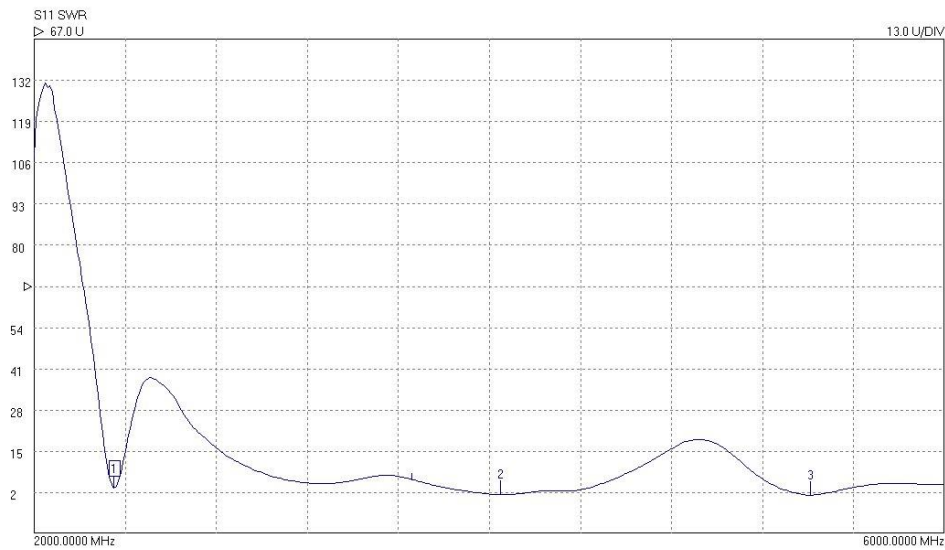

MARKERS


Graph 1 S11
Ref Plane 0.00 mm

Marker 1
2350.0000 MHz
3.478 U

Marker 2
4050.0000 MHz
1.258 U

Marker 3
5410.0000 MHz
1.151 U

S11 Reflection Z

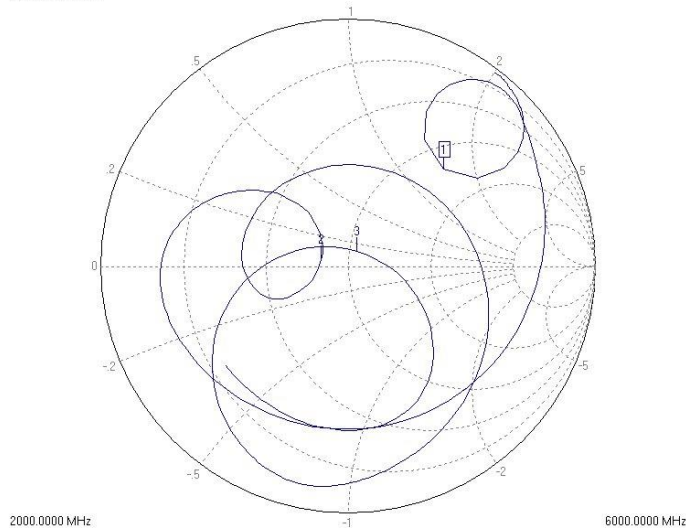

MARKERS

Graph 1 S11
Ref Plane 0.00 mm

Marker 1
2350.0000 MHz
64.818, 74.167 i, 5.02nH

Marker 2
4050.0000 MHz
40.014, 2.482 i, 97.54pH

Marker 3
5410.0000 MHz
53.042, 6.575 i, 193.43pH