
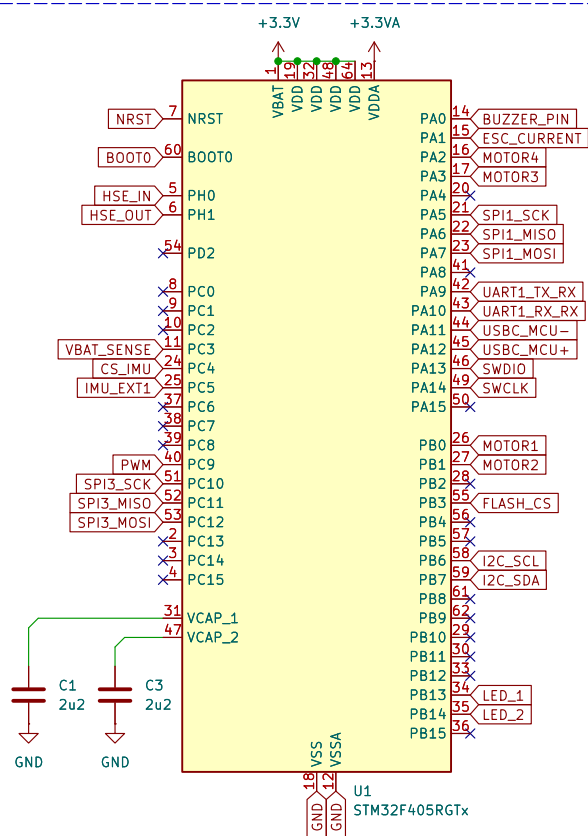


Decoupling and Filtering

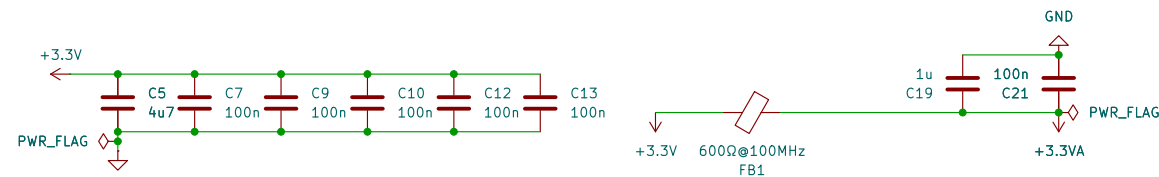

R5
4k7

I2C_SCL → +3.3V


R6
4k7

I2C_SDA → +3.3V



The diagram shows three parallel LED branches connected to a +3.3V supply. Each branch contains an LED (D3, D4, D5) and a resistor (R11, R12, R13) in series. The LEDs are labeled LED_1 (Blue), LED_2 (Green), and LED_3 (Orange). The resistors are labeled R11 (1k), R12 (1k5), and R13 (1k). The circuit is connected to +3.3V and GND.

The diagram shows the NRST pin connected to a pull-up resistor R10 (10k) to +3.3V and a capacitor C23 (100n) to GND.


IMU

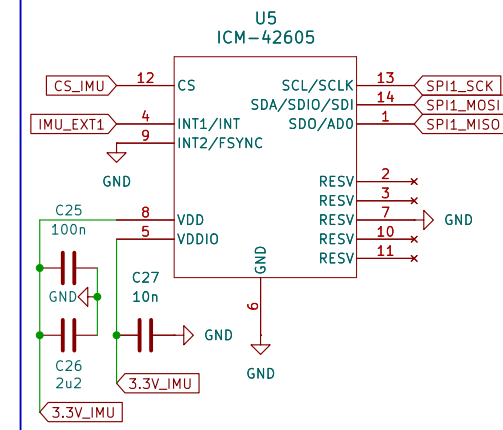

ESC

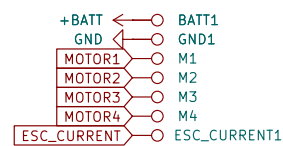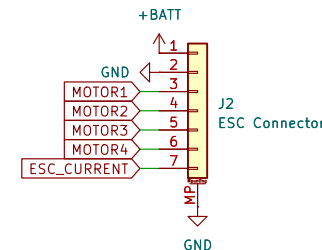


External Buzzer

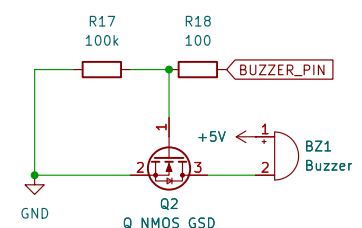


SWDIO ← SWDIO1 +3.3V
SWCLK ← SWCLK1 +5V
NRST ← NRST1 GND

Reverse Voltage and Overvoltage Protection

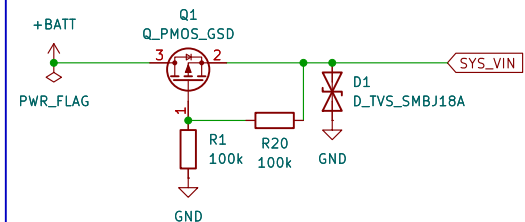

ESD Protection



Sanoj Siby

File: BLDC_FC.kicad_sch

Title: BLDC Flight Controller

Date:

0.4

KiCad E.D.A. 10.0.4

Rev: V1

Id: 1/1