

Cisco Packet Tracer - D:\static route project 2.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x 1544 y 591

Simulation Panel

Event List

Vis	Time(sec)	Last Device
	1.050	-
	1.051	Switch0(2)
	1.051	Switch0(2)
	2.065	-
	2.066	Switch0(1)
	2.068	Switch0(1)
	2.944	-
	2.945	Switch0
	2.945	Switch0
	2.945	-
	2.946	PC2

Reset Simulation Constant Delay Captured to 2.946 s

Play Controls

Event List Filters - Visible Events

ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPsec, ISAKMP, IoT, IoT TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PoP, POP3, PPP, PPPoE, PTP, Protocol, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Edit Filters Show All/None

Time: 00:52:06.410 PLAY CONTROLS

Scenario 0

New Delete

Toggle PDU List Window

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

```
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
                  192.50.20.1

Bluetooth Connection:
Connection-specific DNS Suffix.:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                  0.0.0.0

C:\>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Reply from 223.0.50.10: bytes=32 time=16ms TTL=125

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 16ms, Maximum = 16ms, Average = 16ms

C:\>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time<1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=13ms TTL=125
Reply from 223.0.50.10: bytes=32 time=13ms TTL=125
Reply from 223.0.50.10: bytes=32 time=11ms TTL=125

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 13ms, Average = 9ms

C:\>
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Pinging 223.0.50.10 with 32 bytes of data:
Reply from 223.0.50.10: bytes=32 time<1ms TTL=125
Reply from 223.0.50.10: bytes=32 time=13ms TTL=125
Reply from 223.0.50.10: bytes=32 time=13ms TTL=125
Reply from 223.0.50.10: bytes=32 time=11ms TTL=125

Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 13ms, Average = 9ms

C:\>
C:\>
C:\>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Reply from 172.36.0.10: bytes=32 time=11ms TTL=124

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),
Approximate round trip times in milli-seconds:
    Minimum = 11ms, Maximum = 11ms, Average = 11ms

C:\>ping 172.36.0.10


Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time<1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=12ms TTL=124
Reply from 172.36.0.10: bytes=32 time=12ms TTL=124
Reply from 172.36.0.10: bytes=32 time=12ms TTL=124

Ping statistics for 172.36.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 12ms, Average = 9ms

C:\>
```

Top

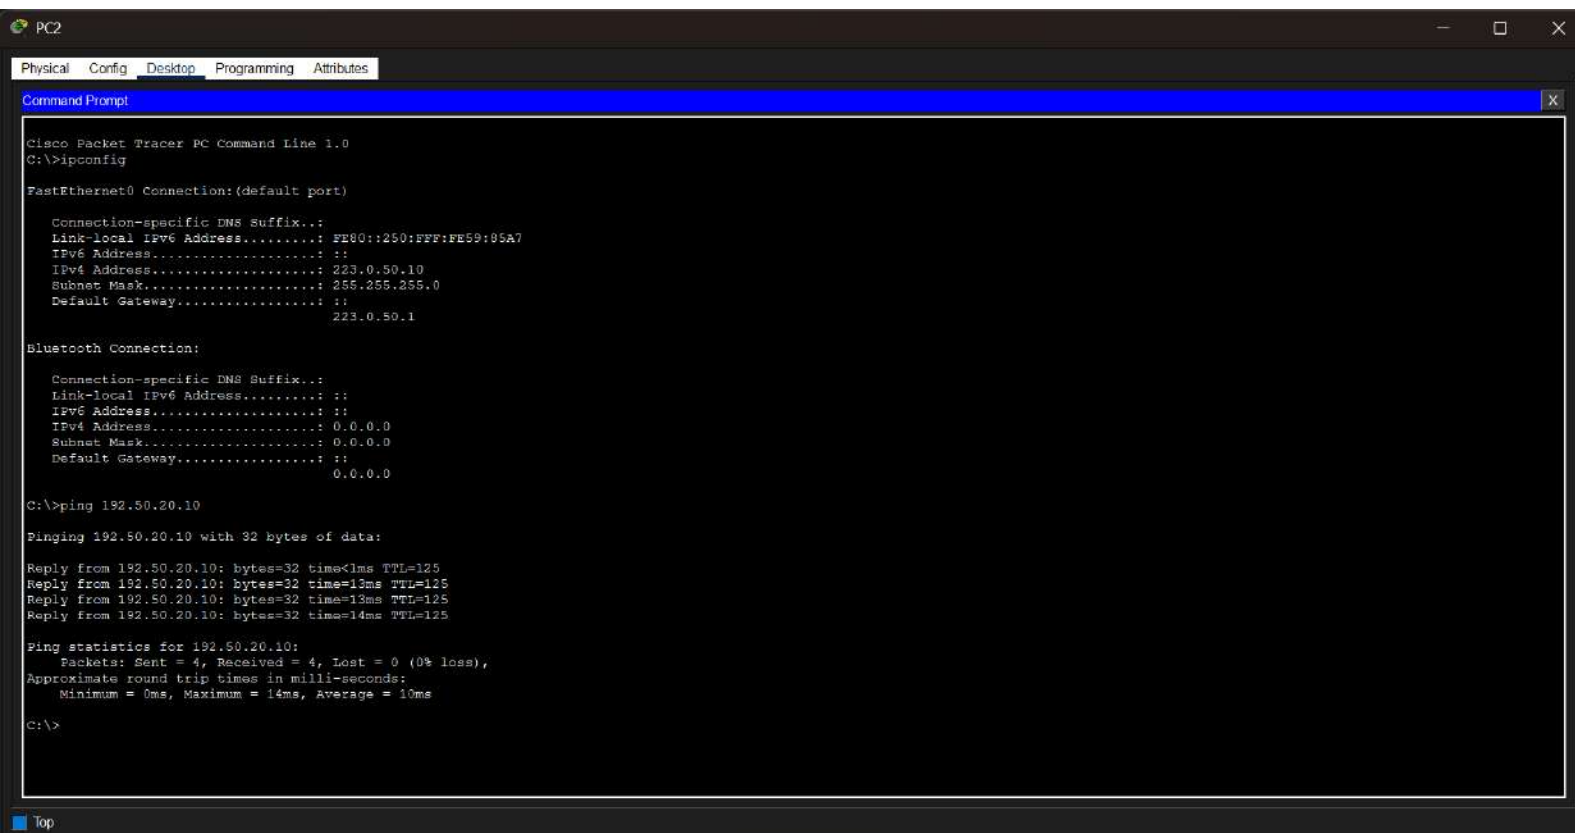

PC2

Physical Config Desktop Programming Attributes

Command Prompt

Subnet Mask.....: 255.255.255.0
Default Gateway.....: ::
 223.0.50.1

Bluetooth Connection:

Connection-specific DNS Suffix...:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
 0.0.0.0

C:\>ping 192.50.20.10

Pinging 192.50.20.10 with 32 bytes of data:

Reply from 192.50.20.10: bytes=32 time<1ms TTL=125
Reply from 192.50.20.10: bytes=32 time=13ms TTL=125
Reply from 192.50.20.10: bytes=32 time=13ms TTL=125
Reply from 192.50.20.10: bytes=32 time=14ms TTL=125

Ping statistics for 192.50.20.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 14ms, Average = 10ms

C:\>ping 172.36.0.10


Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time=1ms TTL=124
Reply from 172.36.0.10: bytes=32 time=16ms TTL=124
Reply from 172.36.0.10: bytes=32 time=11ms TTL=124
Reply from 172.36.0.10: bytes=32 time=11ms TTL=124

Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 16ms, Average = 9ms

C:\>

Top

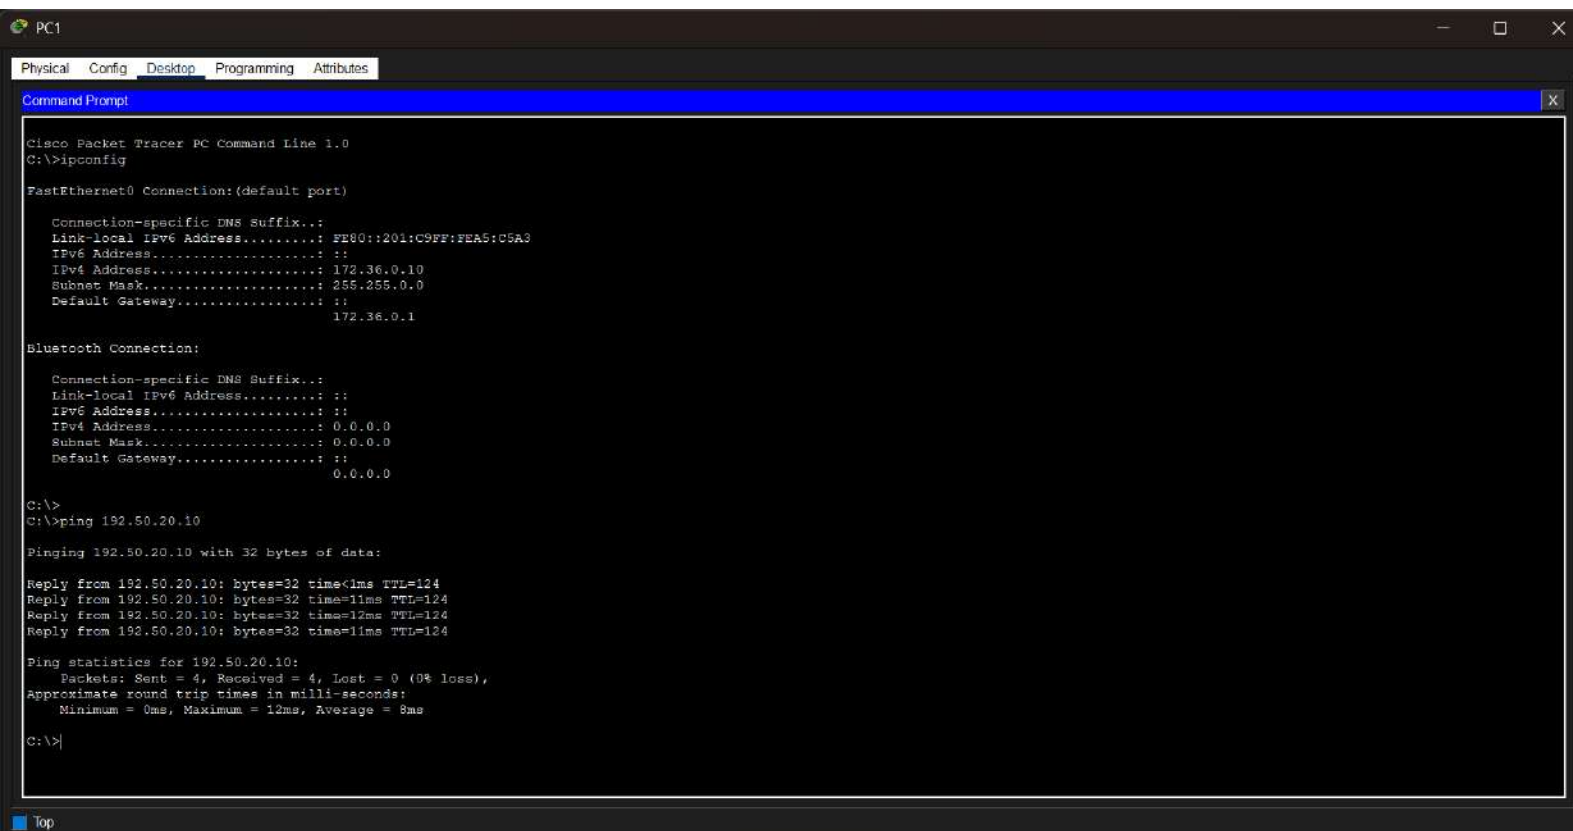

```
PC1
Physical Config Desktop Programming Attributes
Command Prompt
Default Gateway.....: ::
                        172.36.0.1

Bluetooth Connection:

Connection-specific DNS Suffix.:
Link-local IPv6 Address.....: ::
IPv6 Address.....: ::
IPv4 Address.....: 0.0.0.0
Subnet Mask.....: 0.0.0.0
Default Gateway.....: ::
                        0.0.0.0

C:\>
C:\>ping 192.50.20.10

Pinging 192.50.20.10 with 32 bytes of data:

Reply from 192.50.20.10: bytes=32 time<1ms TTL=124
Reply from 192.50.20.10: bytes=32 time=11ms TTL=124
Reply from 192.50.20.10: bytes=32 time=12ms TTL=124
Reply from 192.50.20.10: bytes=32 time=11ms TTL=124

Ping statistics for 192.50.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 8ms


C:\>ping 223.0.50.10


Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time<1ms TTL=124
Reply from 223.0.50.10: bytes=32 time=12ms TTL=124
Reply from 223.0.50.10: bytes=32 time<1ms TTL=124
Reply from 223.0.50.10: bytes=32 time=11ms TTL=124


Ping statistics for 223.0.50.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 5ms


C:\>
```

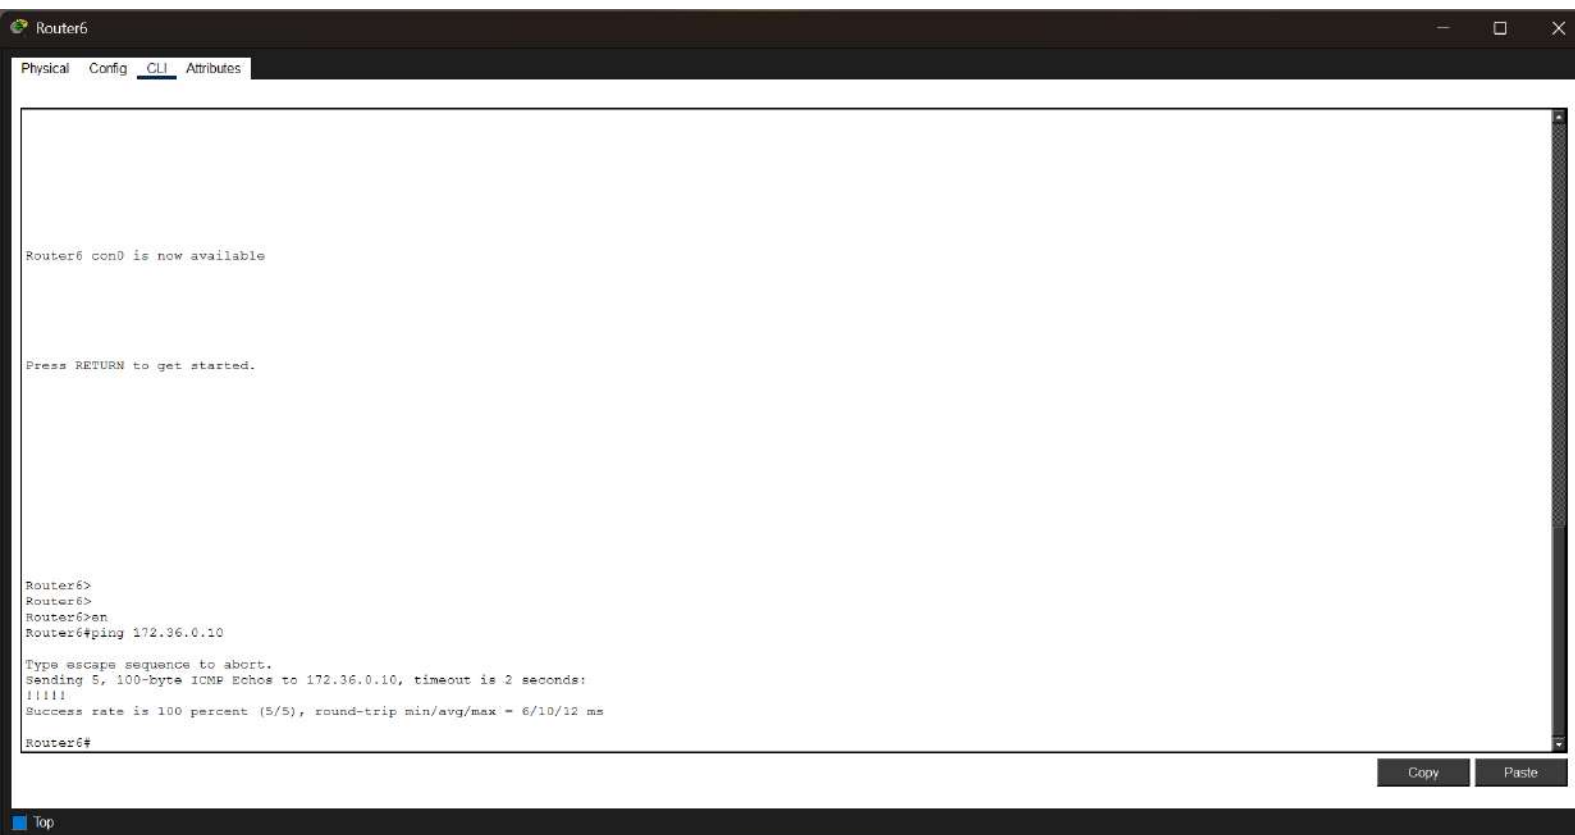

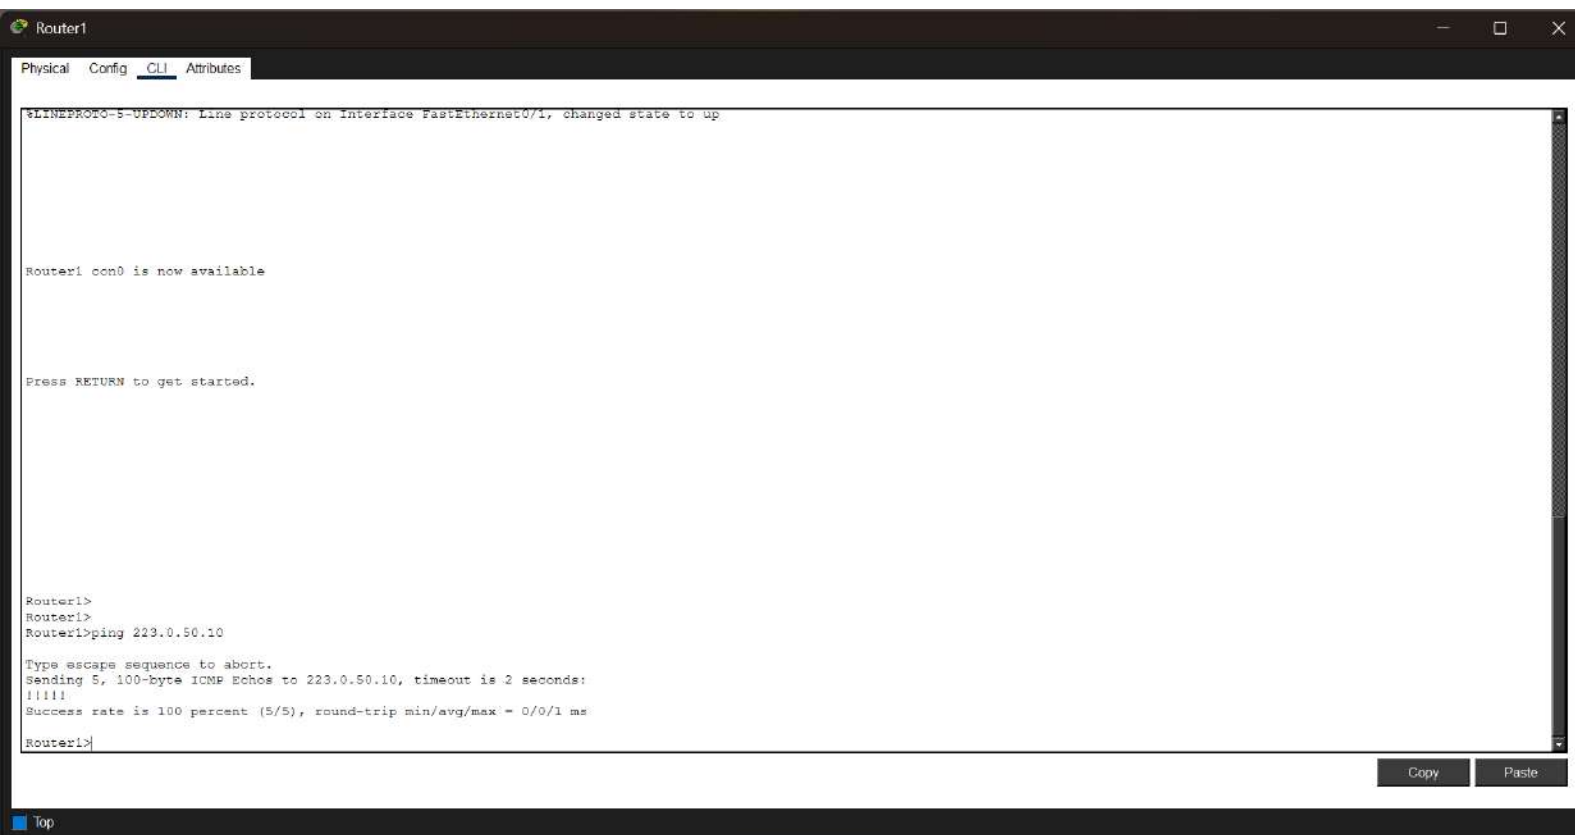



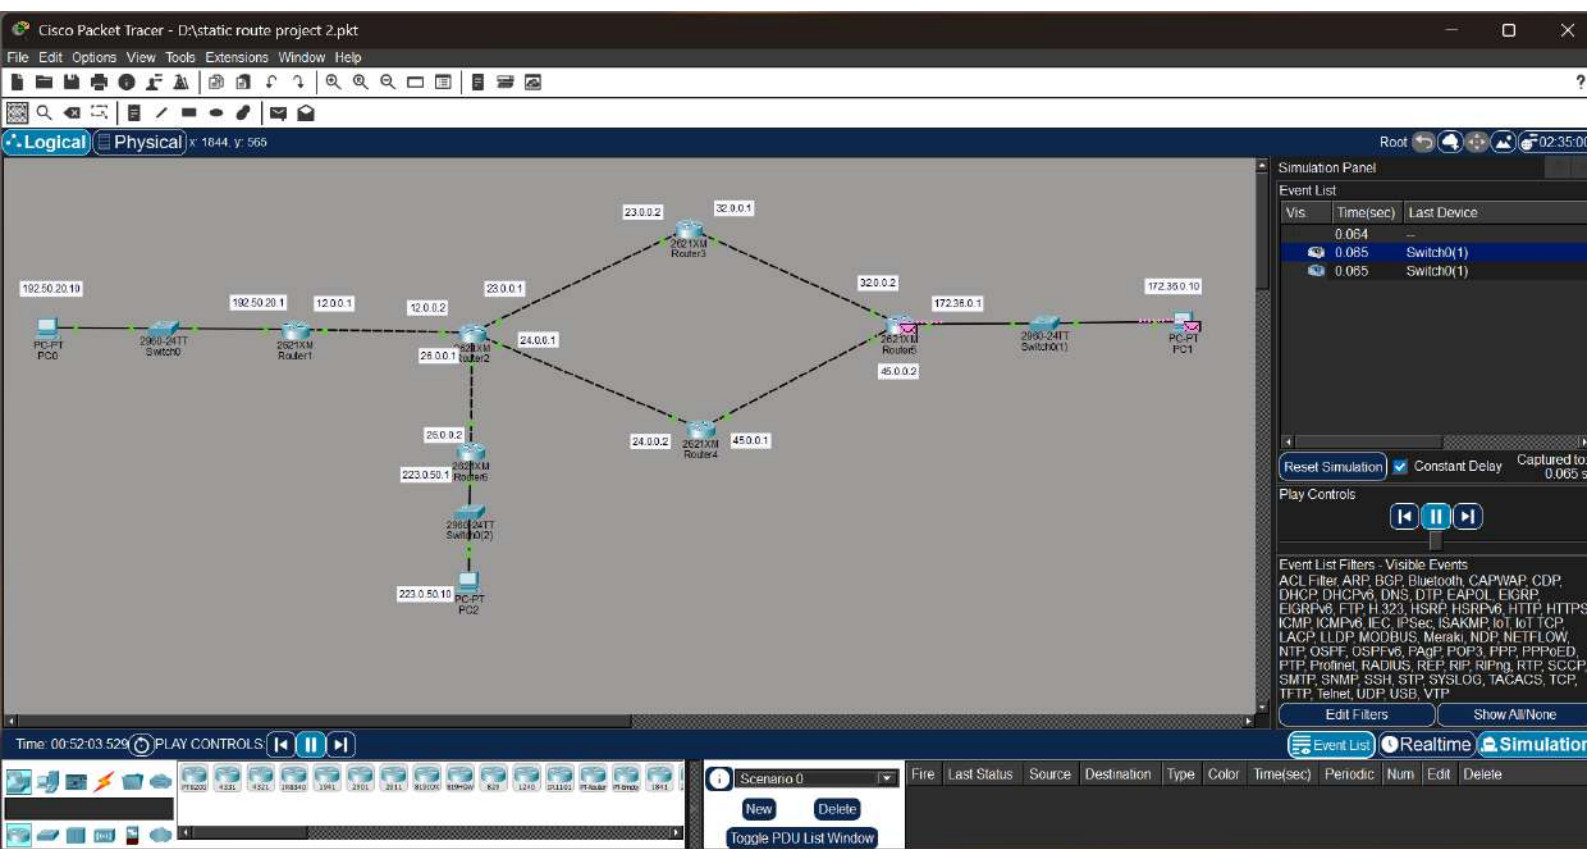

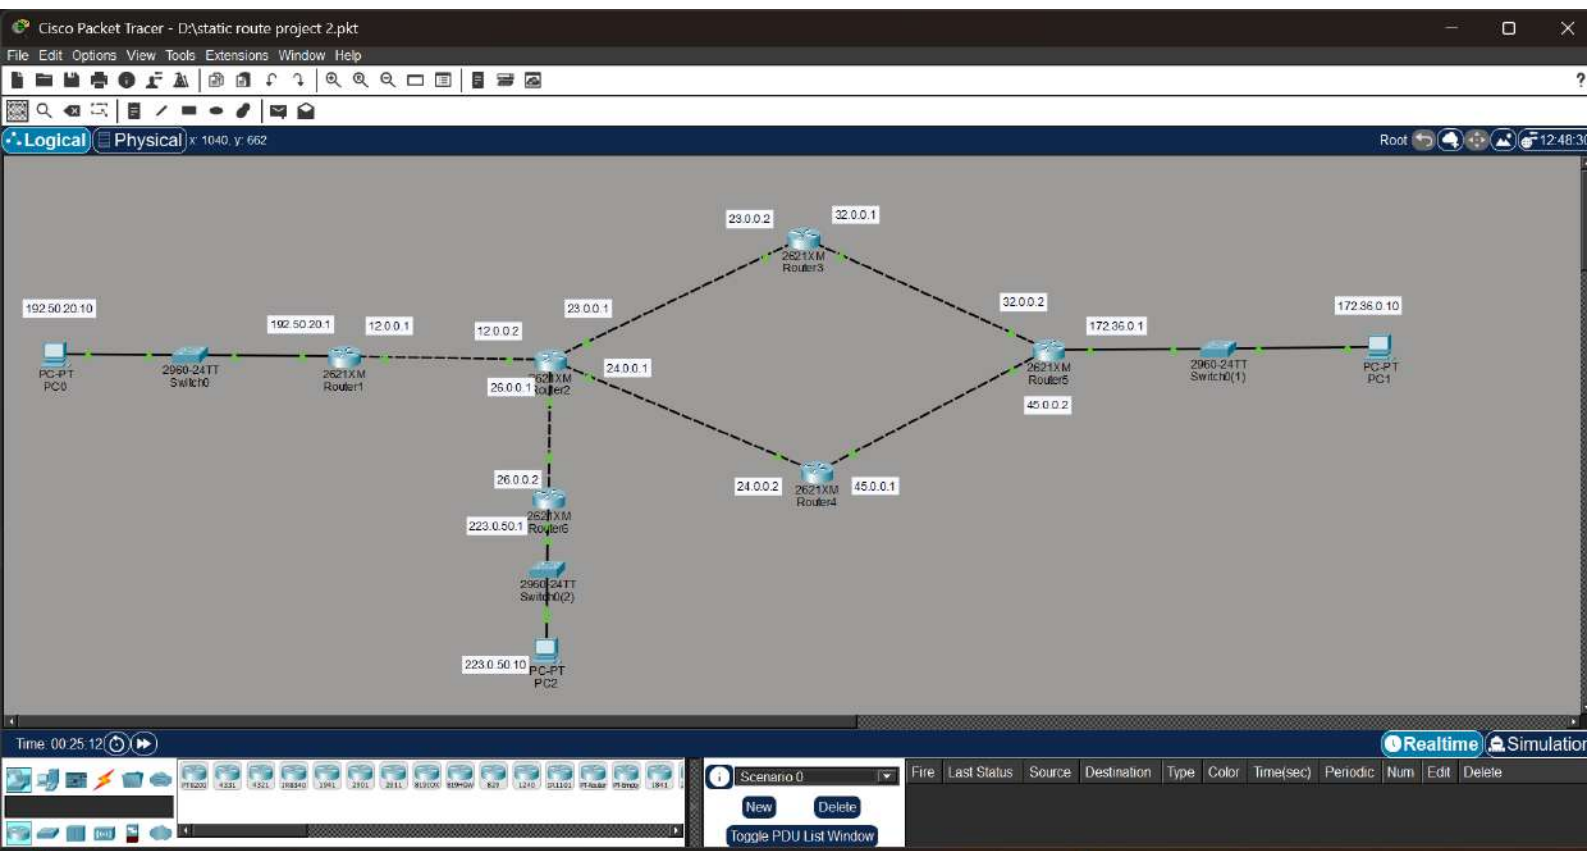

sta.txtA2.1 H28.96.5step1160+7httpsgCreate a treradd thshow iRouter 0 cor0th ROUTERrouter

FileEditViewH1BILSSA

router 0 configuration commands

```
r1>en
r1>#conf t
r1(config)>#int fa0/0
r1(config-if)>#ip add 192.50.20.10 255.255.255.0
r1(config-if)>#no sh
r1(config-if)>#ex
r1(config)>#int fa0/1
r1(config-if)>#ip add 12.0.0.1 255.0.0.0
r1(config-if)>#no sh
r1(config-if)>#exit
r1(config)>#ip route 26.0.0.0 255.0.0.0 12.0.0.2
r1(config)>#ip route 223.0.50.0 255.255.255.0 12.0.0.2
r1(config)>#ip route 24.0.0.0 255.0.0.0 12.0.0.2
r1(config)>#ip route 45.0.0.0 255.0.0.0 12.0.0.2
r1(config)>#ip route 172.36.0.0 255.255.0.0 12.0.0.2

first router to all

ip route 0.0.0.0 0.0.0.0 12.0.0.2
```

Ln 22, Col 34 | 576 charactersAA Formatted100%Windows (CRLF)UTF-8