





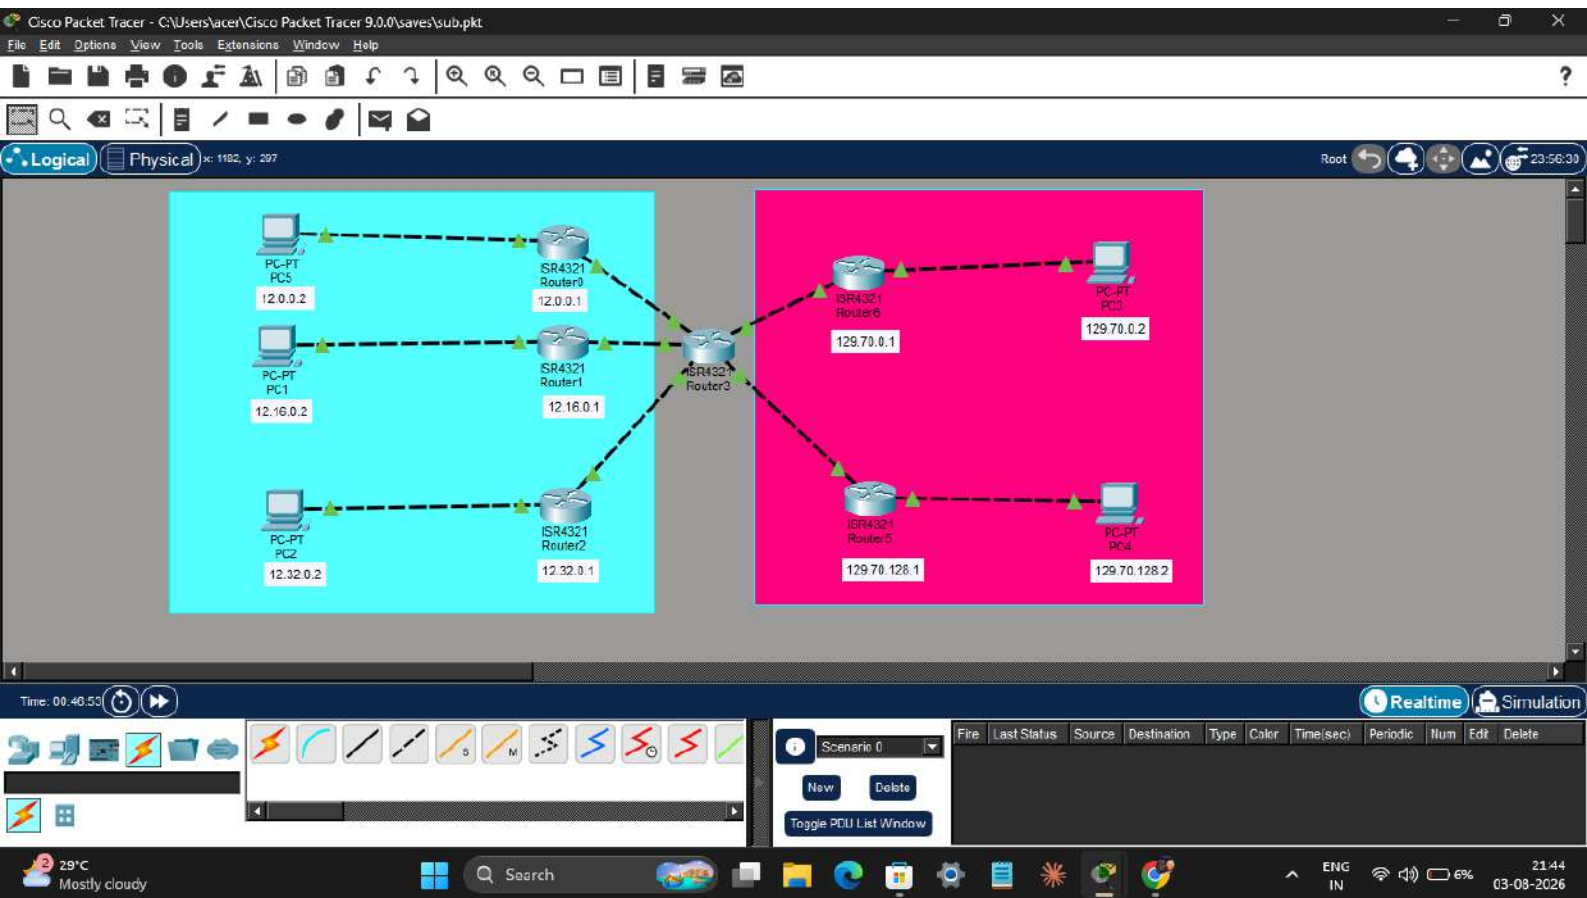

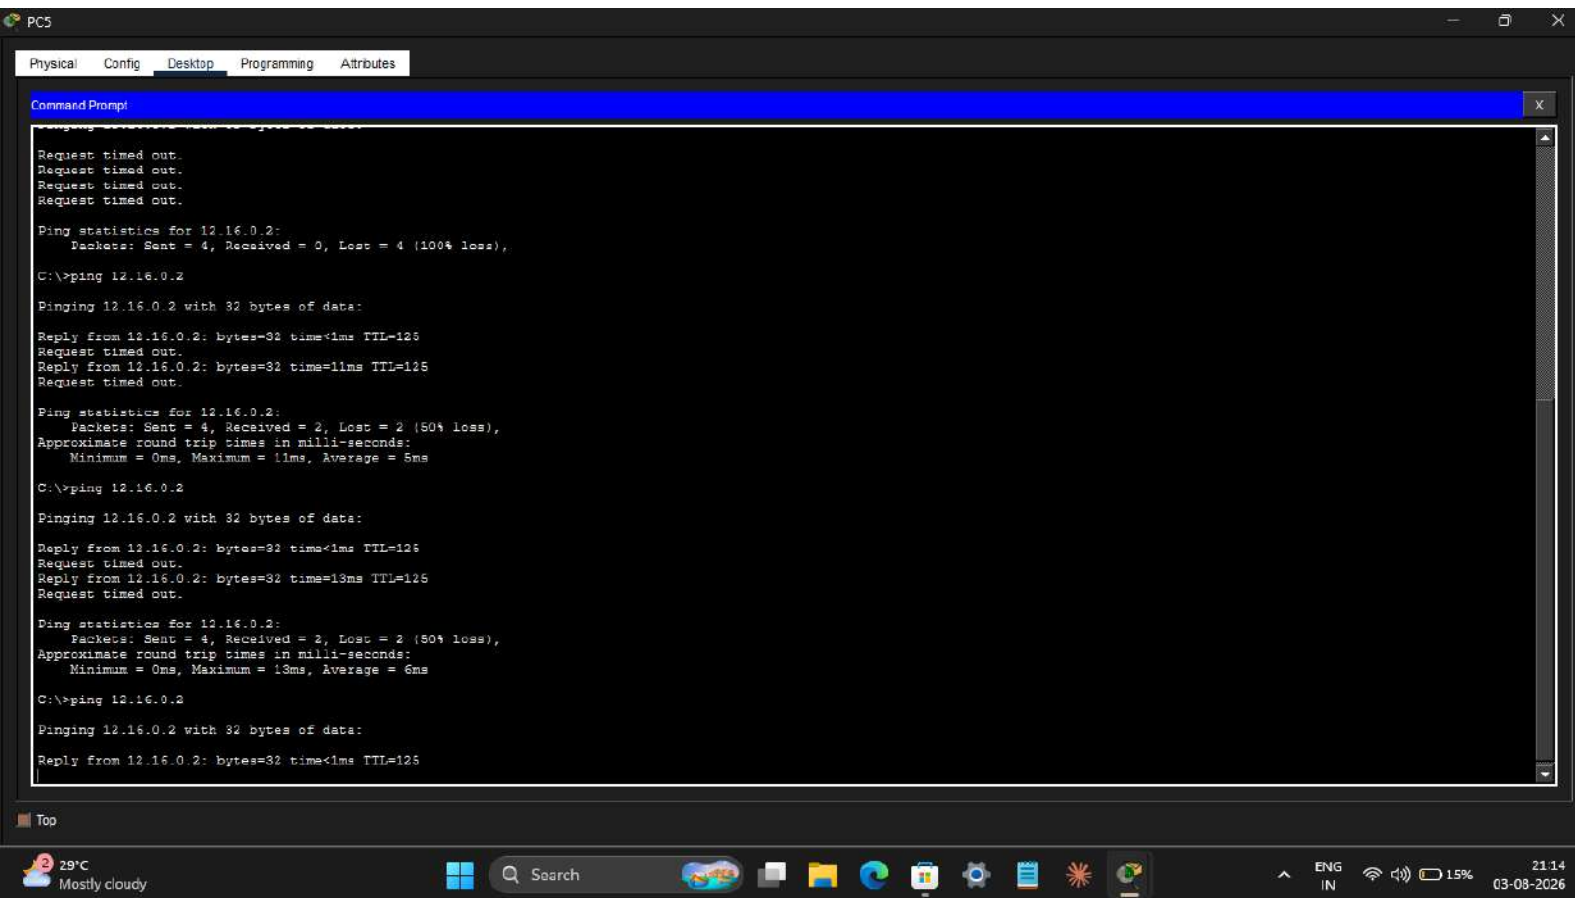

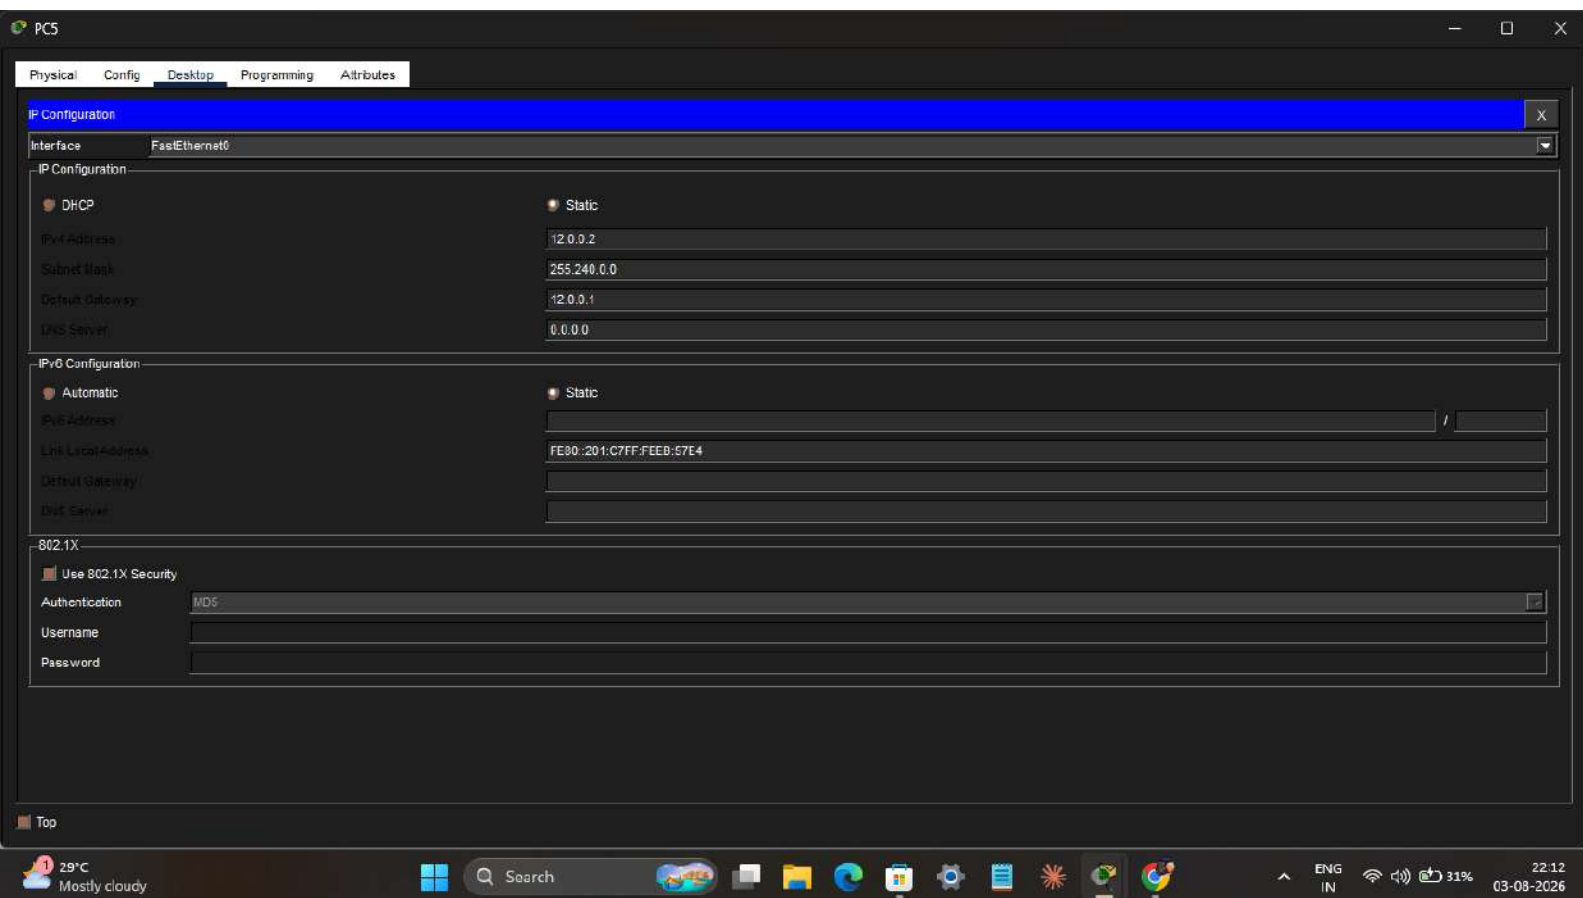

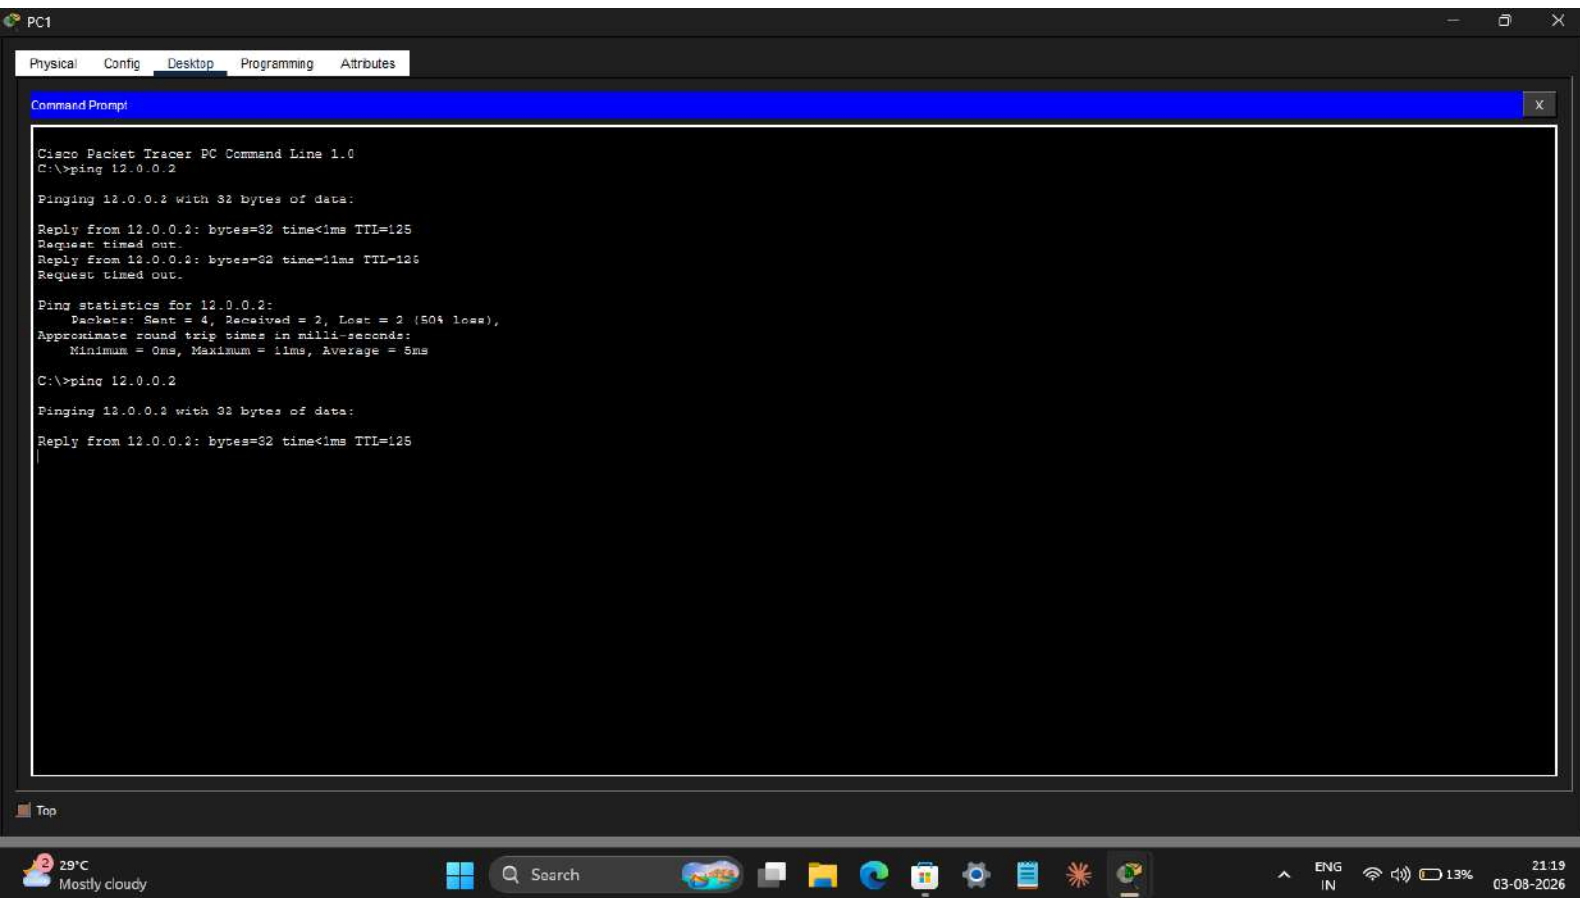

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 12.0.0.2

Pinging 12.0.0.2 with 32 bytes of data:

Reply from 12.0.0.2: bytes=32 time<1ms TTL=125
Request timed out.
Reply from 12.0.0.2: bytes=32 time=11ms TTL=125
Request timed out.

Ping statistics for 12.0.0.2:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 11ms, Average = 5ms
```

```
C:\>ping 12.0.0.2

Pinging 12.0.0.2 with 32 bytes of data:

Reply from 12.0.0.2: bytes=32 time<1ms TTL=125
```

Router3

Physical Config CLI Attributes

```
Router(config)#ip route 12.16.0.0 255.240.0.0 192.168.2.2
Router(config)#ip route 12.32.0.0 255.240.0.0 192.168.3.2
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#ping 12.0.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.0.0.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/4 ms

Router#ping 12.16.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.16.0.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/1/5 ms

Router#
```

Copy Paste

Top

29°C Mostly cloudy

Search

ENG IN 14% 2110 03-08-2026

Router3

Physical Config CLI Attributes

```
!inconsistent address and mask
Router(config)#
Router(config)#
Router(config)#
Router(config)#ip route 12.0.0.0 255.240.0.0 192.168.1.1
!Invalid next hop address (it's this router)
Router(config)#ip route 12.0.0.0 255.240.0.0 192.168.1.2
Router(config)#ip route 12.16.0.0 255.240.0.0 192.168.1.2
Router(config)#ip route 12.32.0.0 255.240.0.0 192.168.1.2
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#ex
Router#
!SYS-5-CONFIG_I: Configured from console by console

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#ping 12.0.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.0.0.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/4 ms

Router#
```

Copy Paste

Top

29°C Mostly cloudy

Search

ENG IN

14%

2117 03-08-2026

Wi-Fi Properties

Networking

Internet Protocol Version 4 (TCP/IPv4) Properties

General

You can get IP settings assigned automatically if your network supports this capability. Otherwise, you need to ask your network administrator for the appropriate IP settings.

☐ Obtain an IP address automatically

☒ Use the following IP address:

IP address:

Subnet mask:

Default gateway:

☐ Obtain DNS server address automatically

☒ Use the following DNS server addresses:

Preferred DNS server:

Alternate DNS server:

☐ Validate settings upon exit

Advanced...

OK Cancel

Network & internet > Wi-Fi > Wi-Fi

LINUX143

Wi-Fi 5 (802.11ac)

WPA2-Personal

Realtek Semiconductor Corp.

Realtek 8821CE Wireless LAN 802.11ac PCI-E NIC

2024.10.138.0

Band (channel): 5 GHz (157)

Link speed (Receive/transmit): 433/433 (Mbps)

MAC address: 2409:40f4:124:76a4:cb17:3dab:e182:c5e9

IPv6 address: fe80::7e0f:4732:29c8:bfc2%16

Default gateway: fe80::ee91:51ff:fe0e:7976%16

Security: 2409:40f4:124:76a4:ee91:51ff:fe0e:7976 (Unencrypted)

IPsec: 192.168.31.38

VPN servers: 192.168.31.1 (Unencrypted)

Address (MAC): 58:E4:EB:5E:DB:F0

Copy

More adapter options

Edit

Get help

NIFTY
-0.28%



Search




ENG
IN



22%

11:40

13-07-2026

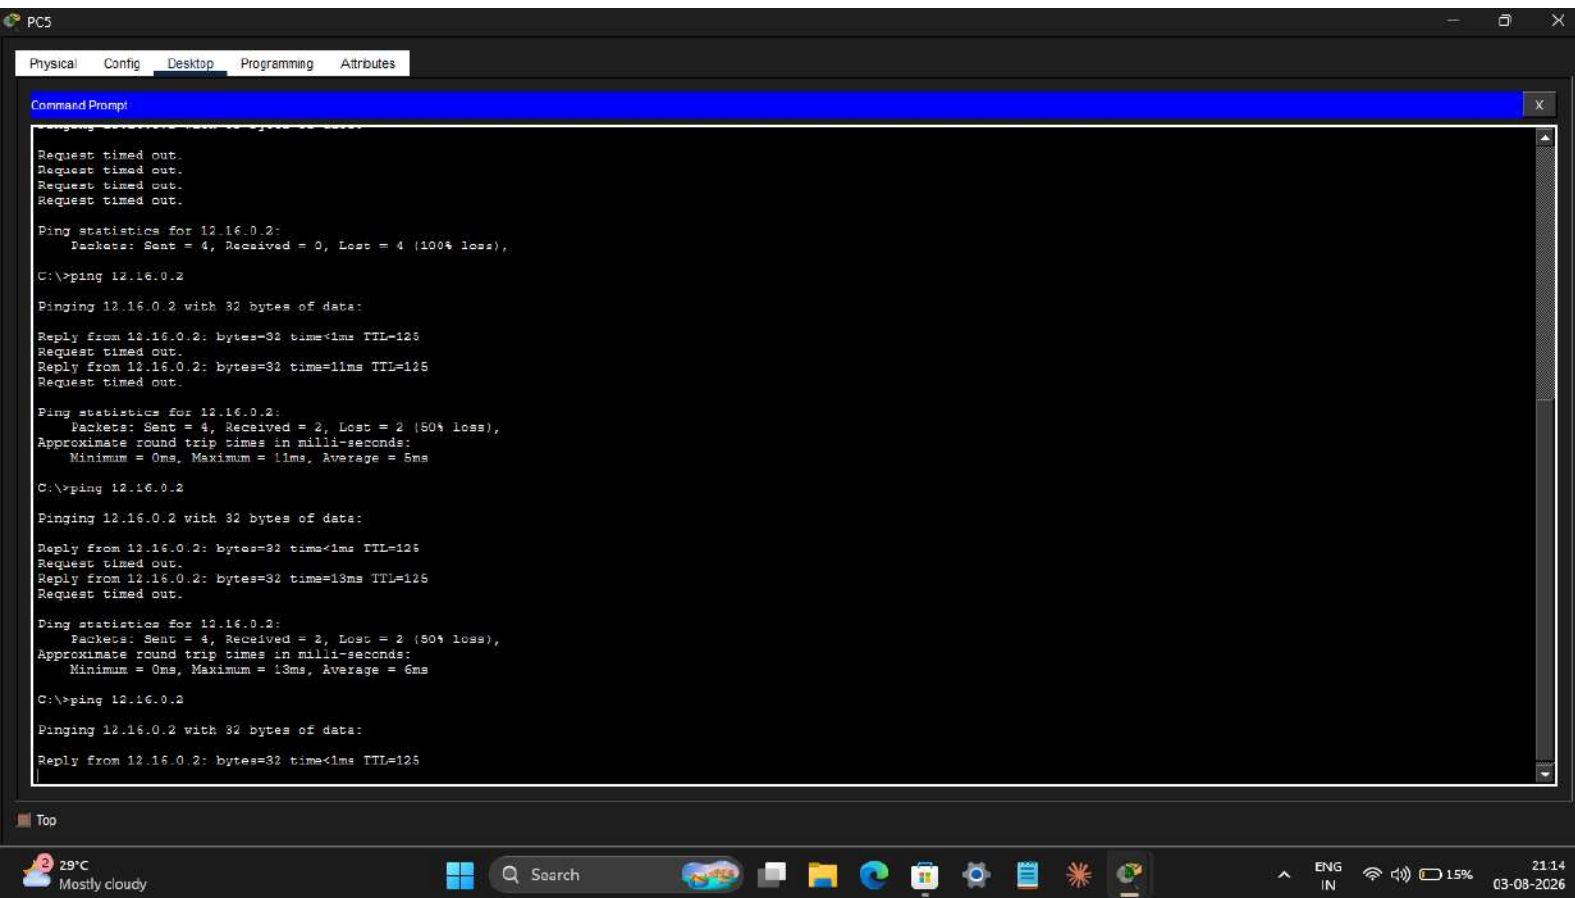

Router3

PhysicalConfigCLIAttributes

```
!inconsistent address and mask
Router(config)#
Router(config)#
Router(config)#
Router(config)#ip route 12.0.0.0 255.240.0.0 192.168.1.1
!Invalid next hop address (it's this router)
Router(config)#ip route 12.0.0.0 255.240.0.0 192.168.1.2
Router(config)#ip route 12.16.0.0 255.240.0.0 192.168.2.2
Router(config)#ip route 12.32.0.0 255.240.0.0 192.168.3.2
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#ex
Router#
!SYS-5-CONFIG_I: Configured from console by console

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#ping 12.0.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.0.0.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/4 ms

Router#
```

CopyPaste

Top

29°C
Mostly cloudy



ENG
IN

  14%

2117
03-08-2026

Router3

Physical Config CLI Attributes

```
Router(config)#ip route 12.16.0.0 255.240.0.0 192.168.2.2
Router(config)#ip route 12.32.0.0 255.240.0.0 192.168.3.2
Router(config)#
Router(config)#
Router(config)#
Router(config)#
Router(config)#ex
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
Router#ping 12.32.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.32.0.2, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#ping 12.0.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.0.0.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/4 ms

Router#ping 12.16.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 12.16.0.2, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/1/5 ms

Router#
```

Copy Paste

Top

29°C Mostly cloudy

Search

ENG IN 14% 2110 03-08-2026

