


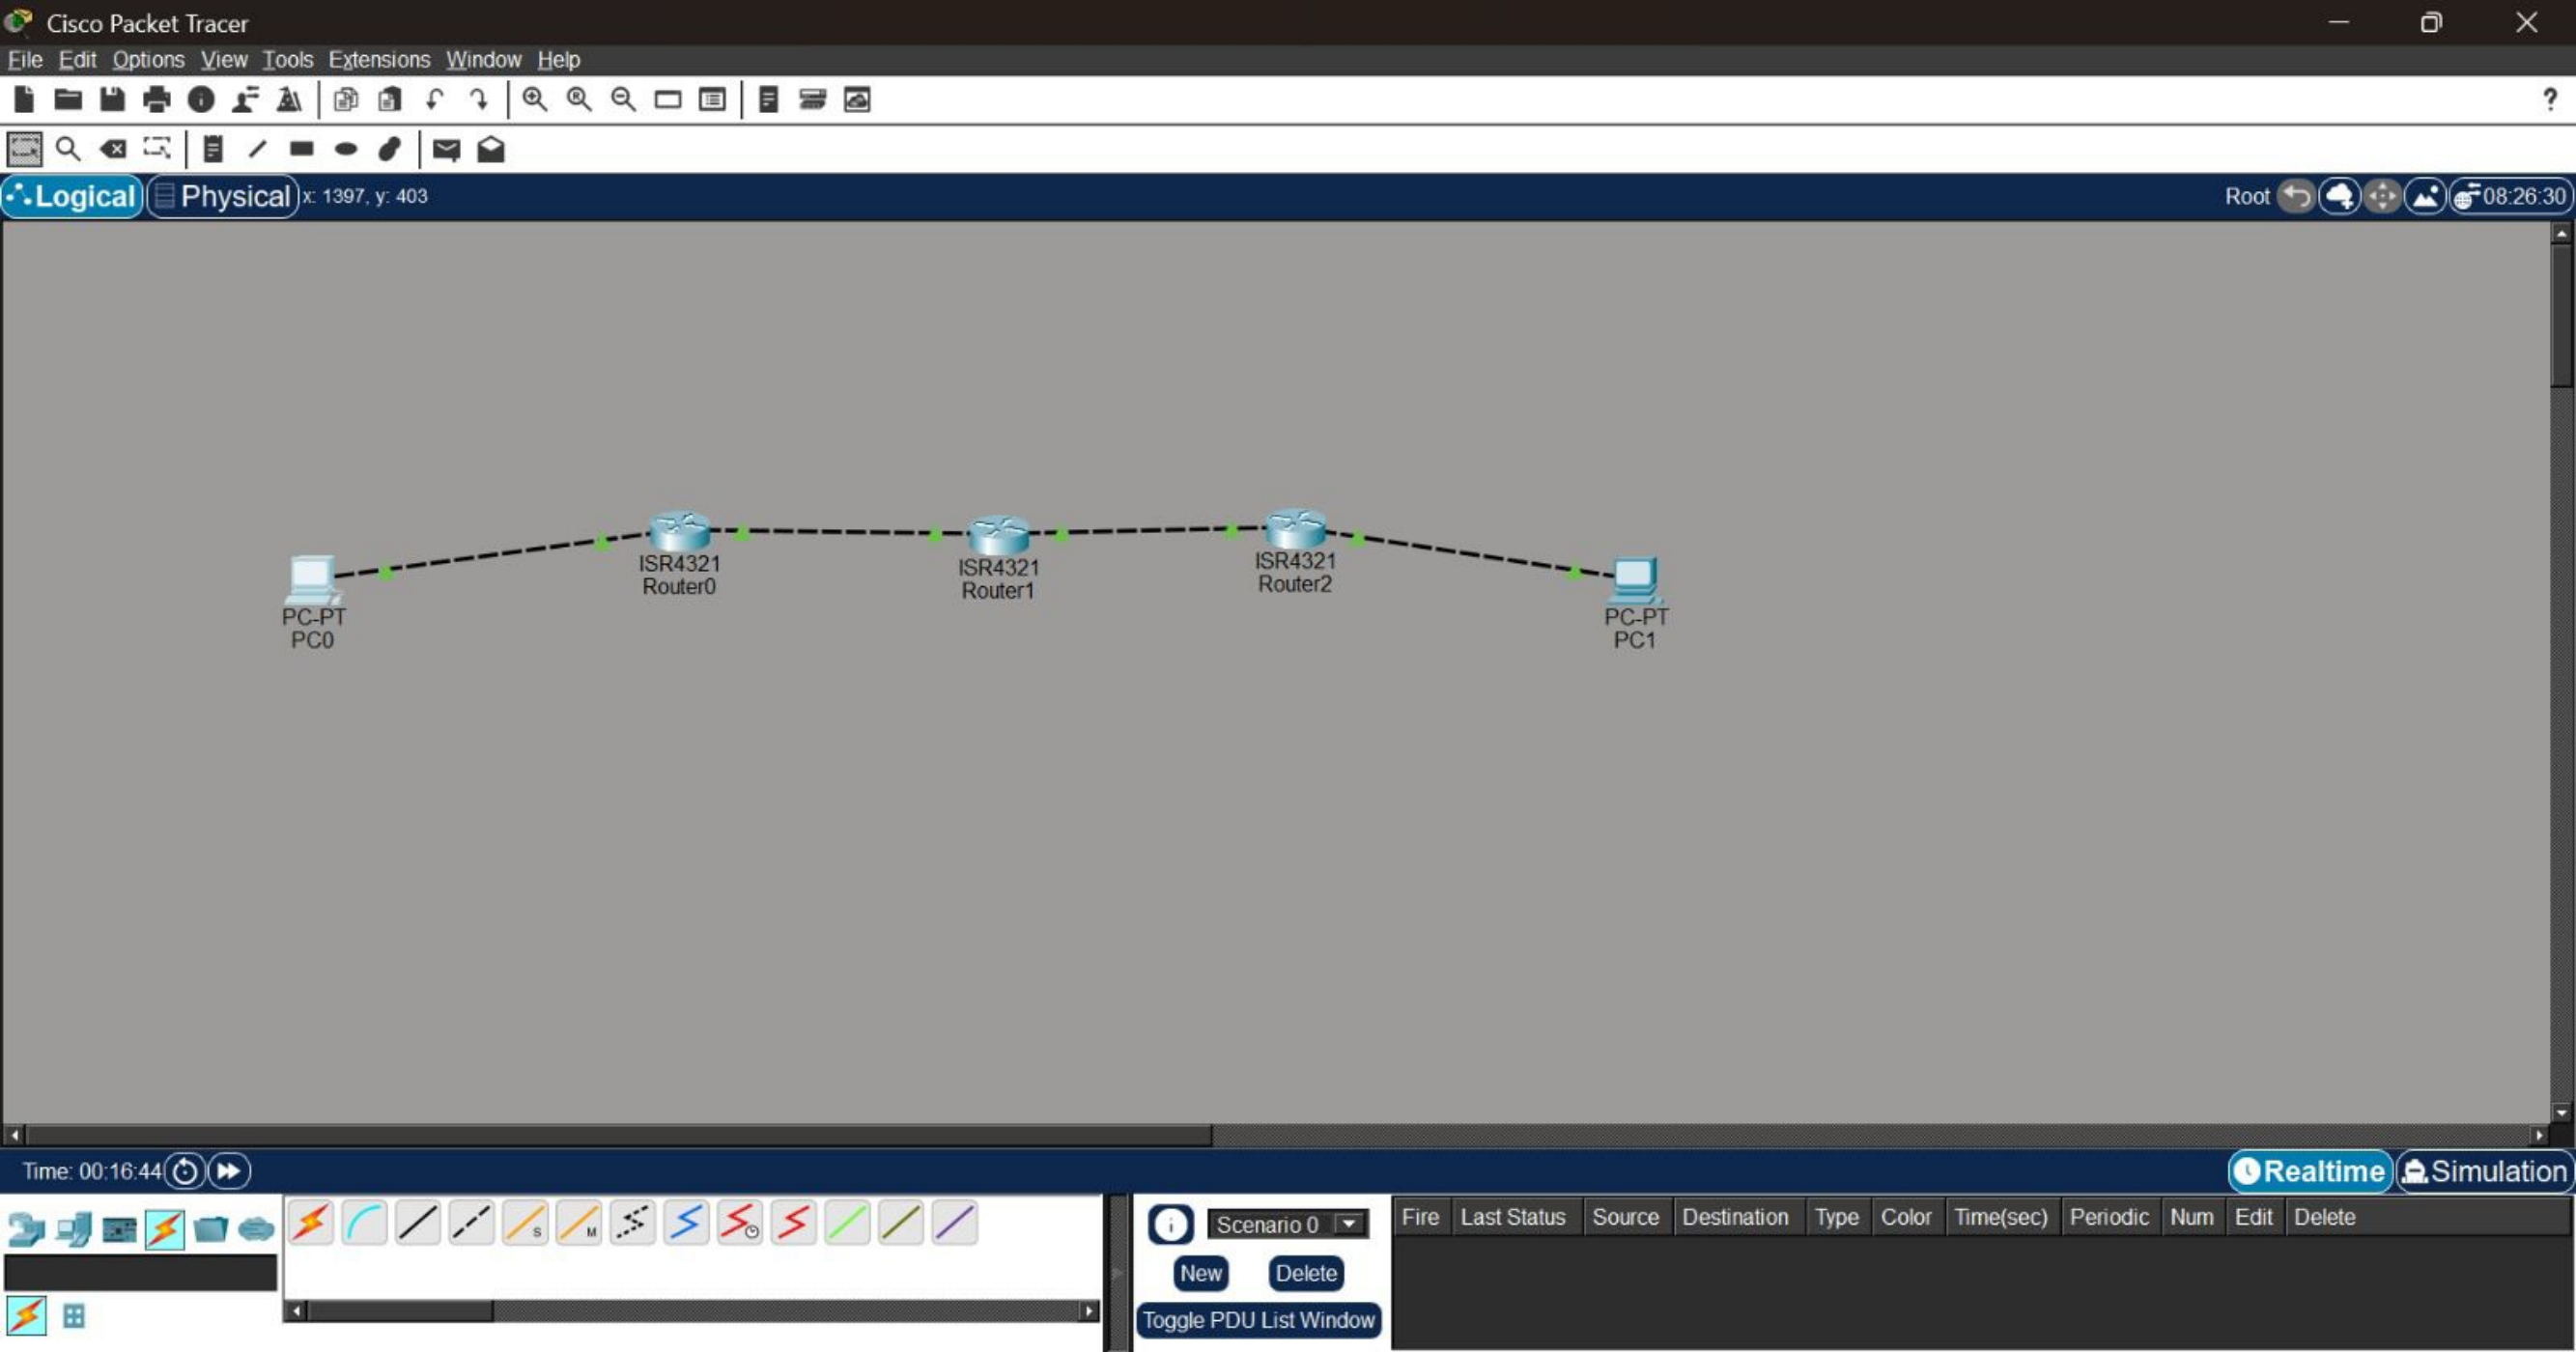

Would you like to enter the initial configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>en

Router#show ip interface brief

Interface	IP-Address	OK?	Method	Status	Protocol
GigabitEthernet0/0/0	unassigned	YES	unset	administratively down	down
GigabitEthernet0/0/1	unassigned	YES	unset	administratively down	down
Vlan1	unassigned	YES	unset	administratively down	down

Router#conf t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#int gi0/0/0

Router(config-if)#10.0.0.1 255.0.0.0

^
% Invalid input detected at '^' marker.

Router(config-if)#ip address 10.0.0.1 255.0.0.0

Router(config-if)#no sh

Router(config-if)#

%LINK-5-CHANGED: Interface GigabitEthernet0/0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up

Router(config-if)#exit

Router(config)#int gi0/0/1

Router(config-if)#ip address 30.0.0.1 255.0.0.0

Router(config-if)#no sh

Router(config-if)#

%LINK-5-CHANGED: Interface GigabitEthernet0/0/1, changed state to up

exit

Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2

Router(config)#ip route 70.0.0.0 255.0.0.0 30.0.0.2

Router(config)#exit

Router#

Copy

Paste

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 70.0.0.10

Pinging 70.0.0.10 with 32 bytes of data:

Request timed out.

Request timed out.

Request timed out.

Reply from 70.0.0.10: bytes=32 time=10ms TTL=125

Ping statistics for 70.0.0.10:

Packets: Sent = 4, Received = 1, Lost = 3 (75% loss),

Approximate round trip times in milli-seconds:

Minimum = 10ms, Maximum = 10ms, Average = 10ms

C:\>ping 70.0.0.10

Pinging 70.0.0.10 with 32 bytes of data:

Reply from 70.0.0.10: bytes=32 time=5ms TTL=125

Reply from 70.0.0.10: bytes=32 time=10ms TTL=125

Reply from 70.0.0.10: bytes=32 time=11ms TTL=125

Reply from 70.0.0.10: bytes=32 time<1ms TTL=125

Ping statistics for 70.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 11ms, Average = 6ms

C:\>

Command Prompt

Cisco Packet Tracer PC Command Line 1.0

C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=4ms TTL=125

Reply from 10.0.0.10: bytes=32 time=12ms TTL=125

Reply from 10.0.0.10: bytes=32 time=11ms TTL=125

Reply from 10.0.0.10: bytes=32 time=12ms TTL=125

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 4ms, Maximum = 12ms, Average = 9ms

C:\>