


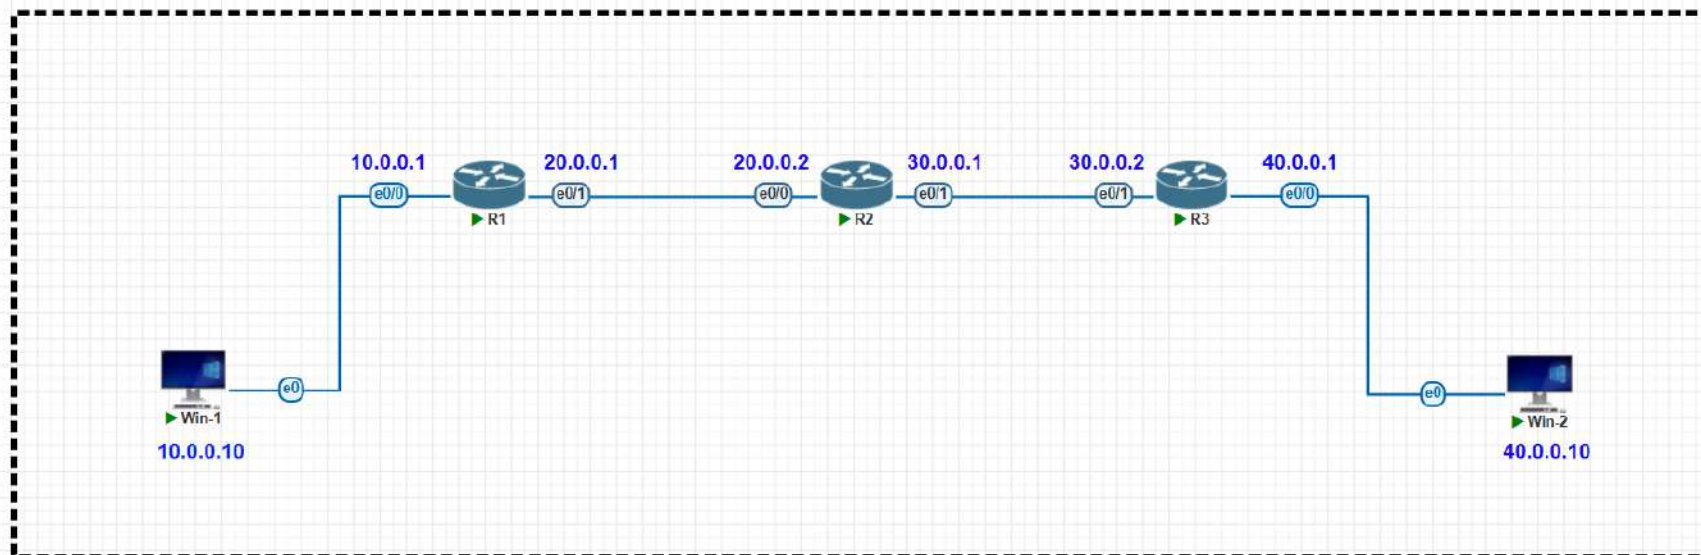

OSPF

Physical 01 : 00 : 00 START

QEMU (Win-1)

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-1...

Old Java ASDM

PuTTY

Tftp32

C:\WINDOWS\system32\cmd.exe

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . . . : 10.0.0.10

IP Address : 255.0.0.0

Subnet Mask : 10.0.0.1

Default Gateway : 10.0.0.1

C:\Documents and Settings\User>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=4ms TTL=125

Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Reply from 40.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 40.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),

Approximate round trip times in milli-seconds:

Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\User>

Win-1

10.0.0.10

Win-2

40.0.0.10

OSPF Physical 01 : 00 : 00 START

32° 19:49 19-08-2026 15%

QEMU (Win-2)

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-1...

Old Java ASDM

PuTTY

Tftp32

Win-1 10.0.0.10

Win-2 40.0.0.10

```
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address . . . . . : 40.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 40.0.0.1

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=3ms TTL=125
Reply from 10.0.0.10: bytes=32 time=1ms TTL=125
Reply from 10.0.0.10: bytes=32 time=1ms TTL=125
Reply from 10.0.0.10: bytes=32 time=1ms TTL=125

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 3ms, Average = 1ms

C:\Documents and Settings\user>
```

Start

C:\WINDOWS\system...

3:22 PM

R1

```
R1#
R1#
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#exit
R1#
*Aug 19 14:00:04.400: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip int br
Interface                IP-Address      OK? Method Status      Protocol
Ethernet0/0              10.0.0.1        YES TFTP    up          up
Ethernet0/1              20.0.0.1        YES TFTP    up          up
Ethernet0/2              unassigned      YES TFTP    down        down
Ethernet0/3              unassigned      YES TFTP    down        down
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int loopback 0
R1(config-if)#
*Aug 19 14:01:23.940: %LINEPROTO-5-UPDOWN: Line protocol on Interface Loopback0, changed state to up
R1(config-if)#ip add 100.0.0.1 255.0.0.0
R1(config-if)#ex
R1(config)#router ospf 10
R1(config-router)#network 10.0.0.0
*Aug 19 14:03:50.634: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config-router)#network 10.0.0.0 0.255.255.255 area 1
R1(config-router)#network 20.0.0.0 0.255.255.255 area 1
R1(config-router)#ex
R1(config)#
*Aug 19 14:07:20.725: %OSPF-5-ADJCHG: Process 10, Nbr 2.2.2.2 on Ethernet0/1 from LOADING to FULL, Loading Done
R1(config)#
```

32°



Search



19:36
19-08-2026

 R2

```
R2#
R2#
R2#en
R2#router ospf 2
      ^
% Invalid input detected at '^' marker.

R2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#router ospf 2
R2(config-router)#router-id 2.2.2.2
R2(config-router)#network 20.0.0.0 0.255.255.255 area 1
R2(config-router)#network 20.0.0.0 0.255.255.255 area 1
*Aug 19 14:07:20.725: %OSPF-5-ADJCHG: Process 2, Nbr 100.0.0.1 on Ethernet0/0 fr
om LOADING to FULL, Loading Done
R2(config-router)#network 30.0.0.0 0.255.255.255 area 1
R2(config-router)#ex
R2(config)#exit
R2#
*Aug 19 14:09:00.194: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip int br
Interface                IP-Address      OK? Method Status          Prot
Ethernet0/0              20.0.0.2        YES TFTP    up              up
Ethernet0/1              30.0.0.1        YES TFTP    up              up
Ethernet0/2              unassigned      YES TFTP    down            down
Ethernet0/3              unassigned      YES TFTP    down            down
R2#
```

```
R3#
R3#
R3#
R3#
R3#en
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#
R3(config)#
R3(config)#
R3(config)#sh ip int br
      ^
% Invalid input detected at '^' marker.

R3(config)#exit
R3#s
*Aug 19 14:10:27.874: %SYS-5-CONFIG_I: Configured from console by console
R3#sh ip int br
Interface                IP-Address      OK? Method Status      Protocol
Ethernet0/0              40.0.0.1        YES TFTP    up          up
Ethernet0/1              30.0.0.2        YES TFTP    up          up
Ethernet0/2              unassigned      YES TFTP    down        down
Ethernet0/3              unassigned      YES TFTP    down        down
R3#
*Aug 19 14:10:42.289: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#router ospf 3
R3(config-router)#network-id 3.3.3.3
      ^
% Invalid input detected at '^' marker.

R3(config-router)#network-id 120.2.2.2
      ^
% Invalid input detected at '^' marker.

R3(config-router)#router-id 3.3.3.3
R3(config-router)#network 30.0.0.0 0.255.255.255 area 1
R3(config-router)#
*Aug 19 14:13:21.503: %OSPF-5-ADJCHG: Process 3, Nbr 2.2.2.2 on Ethernet0/1 from LOADING to FULL, Loading Done
R3(config-router)#network 40.0.0.0 0.255.255.255 area 1
R3(config-router)#ex
R3(config)#
```