


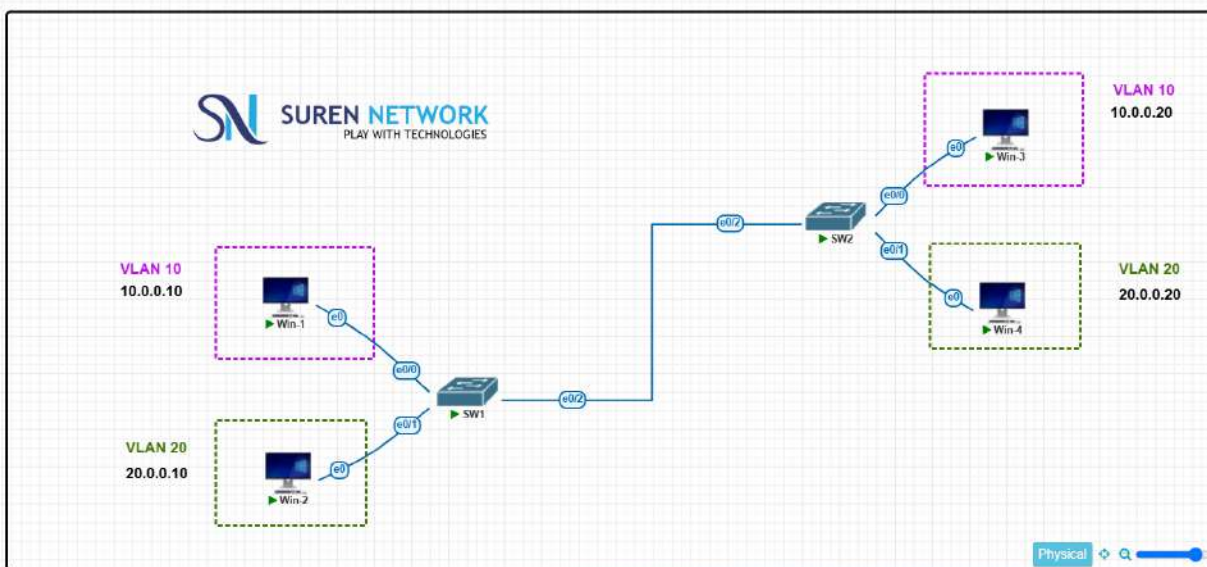

VLAN TRUNK

Physical 01 : 00 : 00 START

```
SW1#
SW1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
SW1(config)#vlan 10
SW1(config-vlan)#name HR
SW1(config-vlan)#exit
SW1(config)#vlan 20
SW1(config-vlan)#name SALES
SW1(config-vlan)#exit
SW1(config)#
*Aug 10 07:49:29.136: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
SW1(config)#int e0/0
SW1(config-if)#switchport access vlan 10
SW1(config-if)#exit
SW1(config)#int 0/1
SW1(config-if)#
% Invalid input detected at '^' marker.


SW1(config)#int e0/1
SW1(config-if)#switchport access vlan 20
SW1(config-if)#exit
SW1(config)#do show vlan brief
VLAN Name                Status    Ports
-----
1    default                active    Et0/2, Et0/3
10   HR                      active    Et0/0
20   SALES                   active    Et0/1
1002 fddi-default          act/unsup
1003 token-ring-default    act/unsup
1004 fddinet-default       act/unsup
1005 trnet-default         act/unsup
SW1(config)#do show interface trunk
SW1(config)#int e0/2
SW1(config-if)#switchport trunk encapsulation dot1q
SW1(config-if)#
% Invalid input detected at '^' marker.

SW1(config-if)#switchport trunk encapsulation dot1q
SW1(config-if)#switchport mode trunk
SW1(config-if)#exit
SW1(config)#do show int trunk
```

SW2

```
SW2#
SW2#
SW2#conf t
Enter configuration commands, one per line. End with CNTL/Z.
SW2(config)#vlan 10
SW2(config-vlan)#name HR
SW2(config-vlan)#ex
SW2(config)#vlan 20
SW2(config-vlan)#name SALES
SW2(config-vlan)#exit
SW2(config)#int e0/0
SW2(config-if)#switchport access vlan 10
SW2(config-if)#
*Aug 10 07:56:36.567: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
SW2(config-if)#ex
SW2(config)#int e0/1
SW2(config-if)#switchport access vlan 20
SW2(config-if)#ex
SW2(config)#int e0/2
SW2(config-if)#switchport trunk encapsulation dot1q
SW2(config-if)#switchport mode trunk
SW2(config-if)#ex
SW2(config)#do show mac address-table
      Mac Address Table
-----
Vlan    Mac Address      Type      Ports
----    -
1       aabb.cc00.0120   DYNAMIC   Et0/2
10      5050.2407.8500   DYNAMIC   Et0/2
10      aabb.cc00.0120   DYNAMIC   Et0/2
20      50df.d307.8600   DYNAMIC   Et0/2
20      aabb.cc00.0120   DYNAMIC   Et0/2
Total Mac Addresses for this criterion: 5
SW2(config)#
```

35°
13:33
10-08-2026

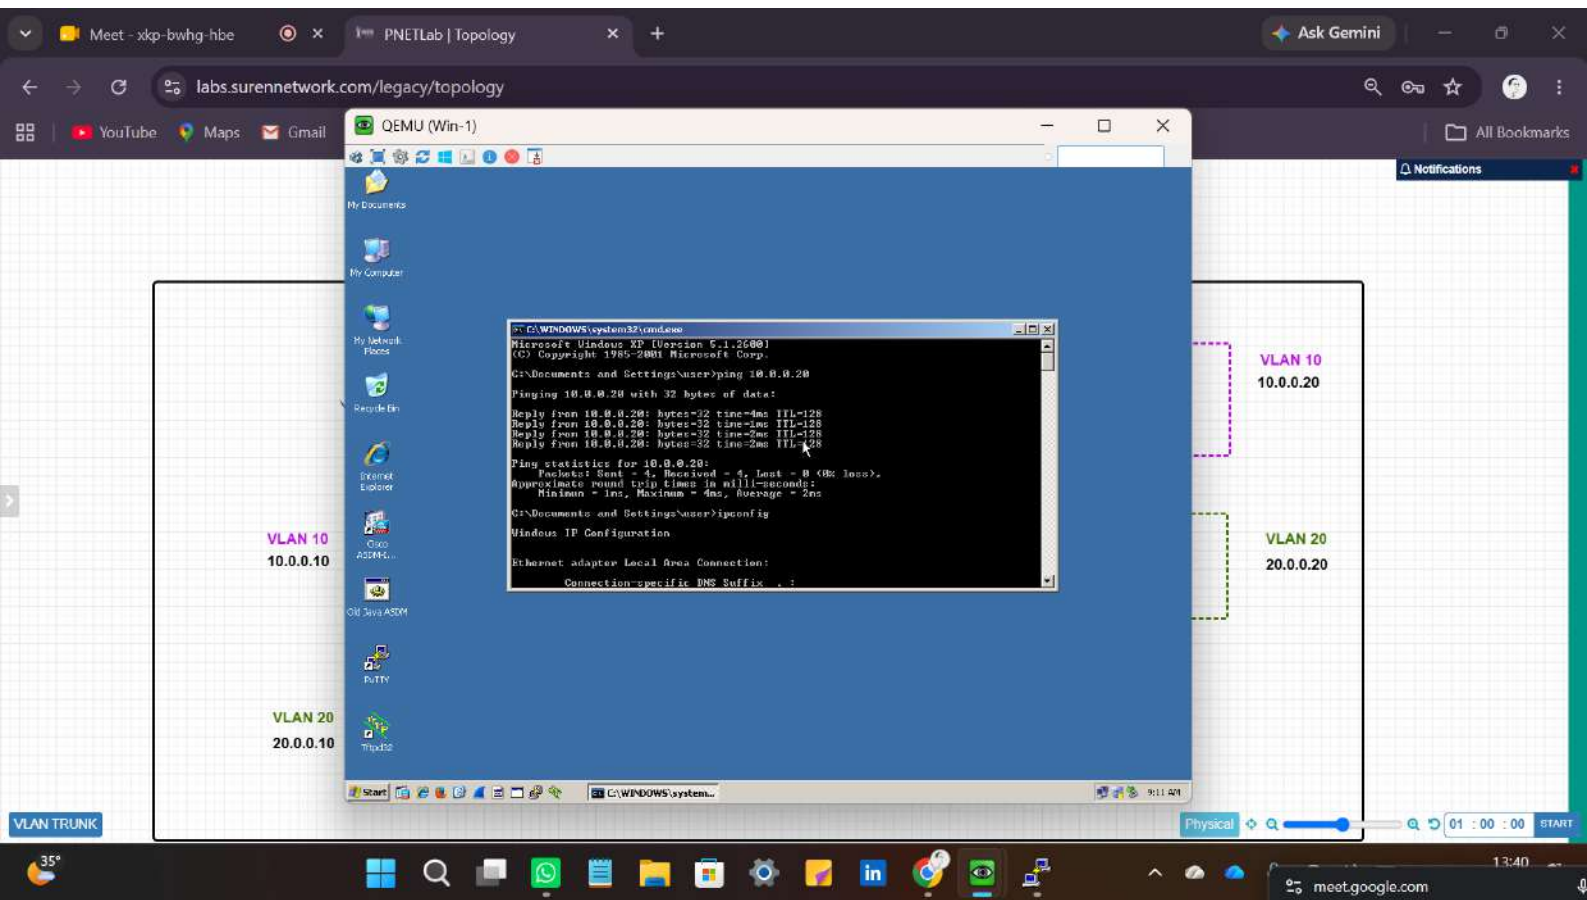

Meet - xkp-bwhg-hbe PNETLab | Topology

labs.surrennetwork.com

QEMU (Win-2)

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>ping 20.0.0.20

Pinging 20.0.0.20 with 32 bytes of data:

Reply from 20.0.0.20: bytes=32 time=4ms TTL=128
Reply from 20.0.0.20: bytes=32 time=2ms TTL=128
Reply from 20.0.0.20: bytes=32 time=1ms TTL=128
Reply from 20.0.0.20: bytes=32 time=1ms TTL=128

Ping statistics for 20.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\Documents and Settings\user>
```

VLAN 10
10.0.0.10

VLAN 20
20.0.0.10

VLAN 10
10.0.0.20

VLAN 20
20.0.0.20

VLAN TRUNK


Physical

01 : 00 : 00

START

13:48
10-08-2026

31%

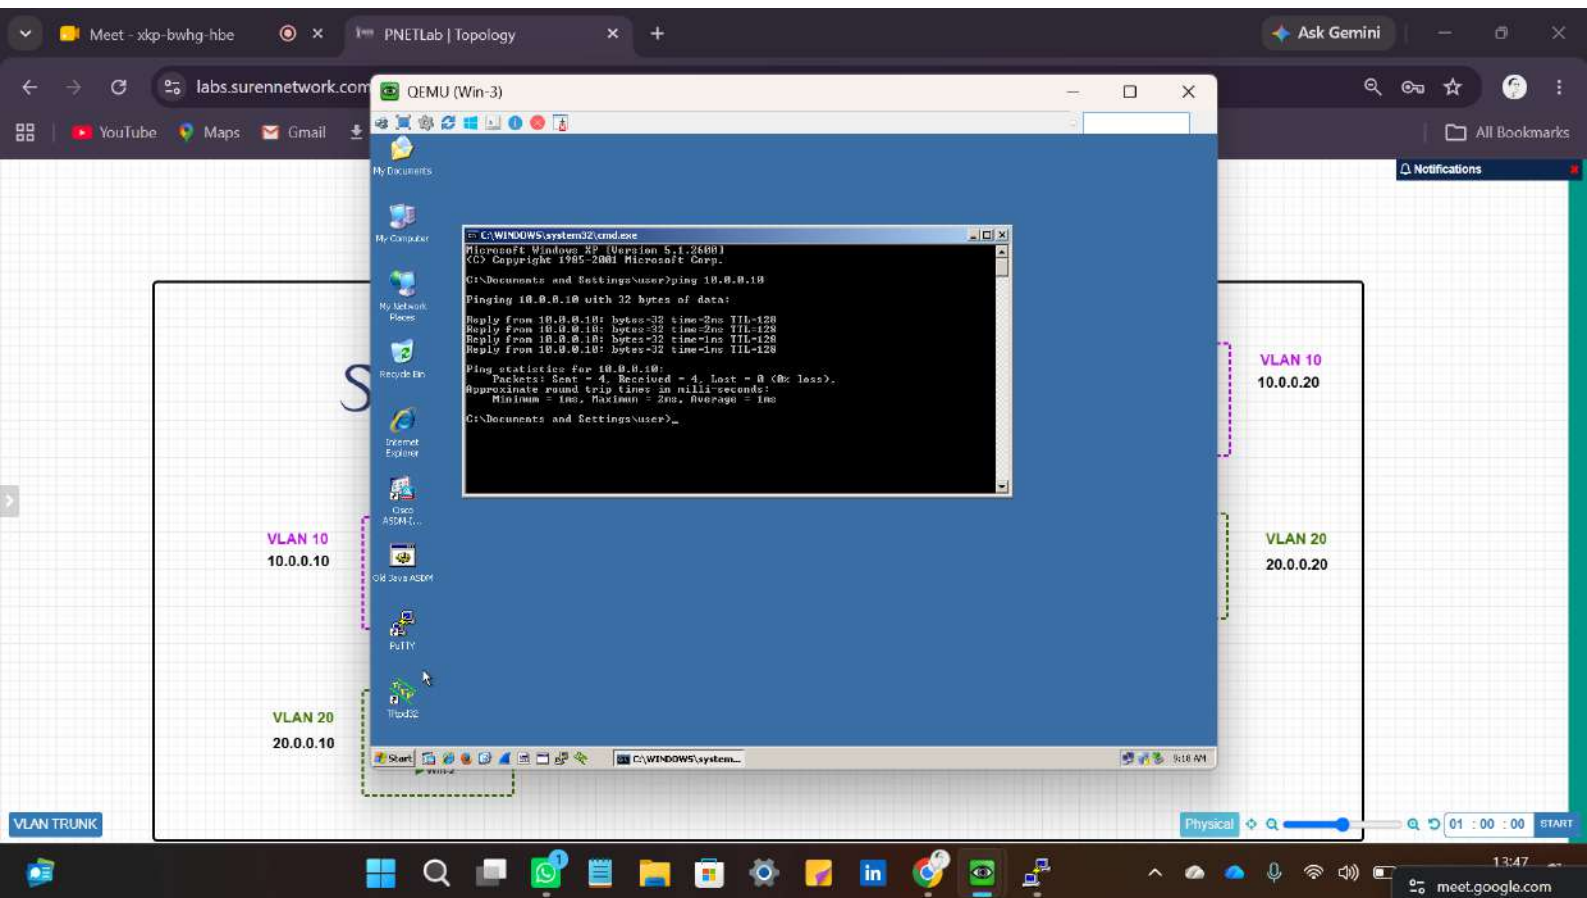

Meet - xkp-bwhg-hbe PNETLab | Topology

labs.surennetwork.com

QEMU (Win-4)

VLAN 10
10.0.0.10

VLAN 20
20.0.0.10

VLAN TRUNK

Physical

01 : 00 : 00

START

13:49
10-08-2026

31%

10.0.0.20

20.0.0.20

```
C:\WINDOWS\system32\cmd.exe
Pinging 10.0.0.20 with 32 bytes of data:
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.

Ping statistics for 10.0.0.20:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>ping 20.0.0.20
Pinging 20.0.0.20 with 32 bytes of data:
Reply from 20.0.0.20: bytes=32 time<1ms TTL=128
Reply from 20.0.0.20: bytes=32 time<1ms TTL=128
Reply from 20.0.0.20: bytes=32 time<1ms TTL=128
Reply from 20.0.0.20: bytes=32 time<1ms TTL=128

Ping statistics for 20.0.0.20:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>
```