



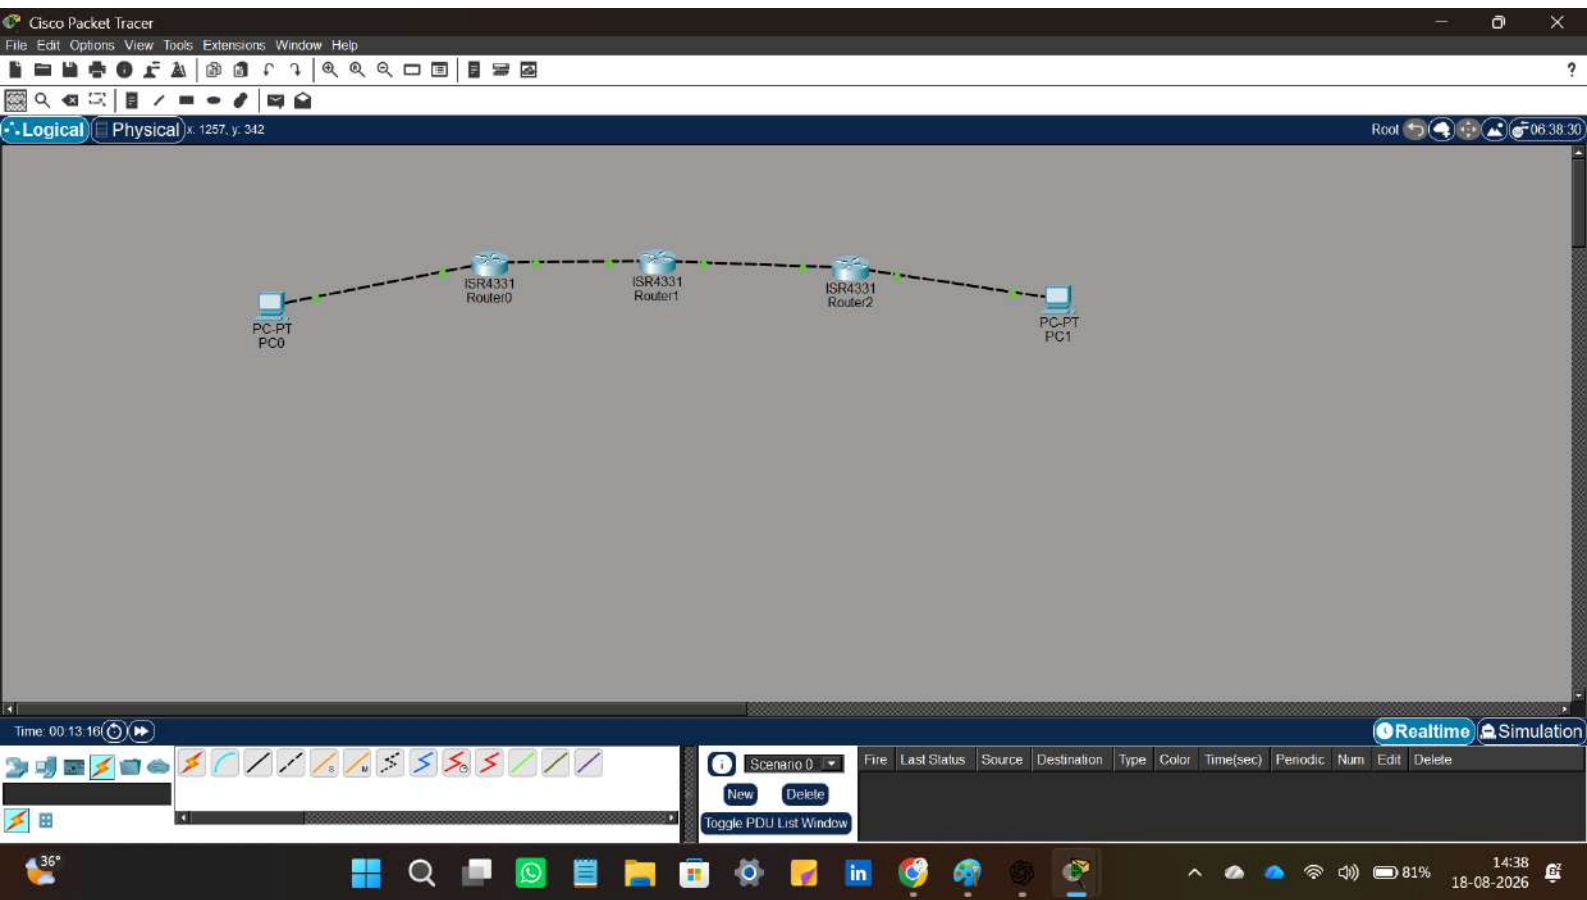

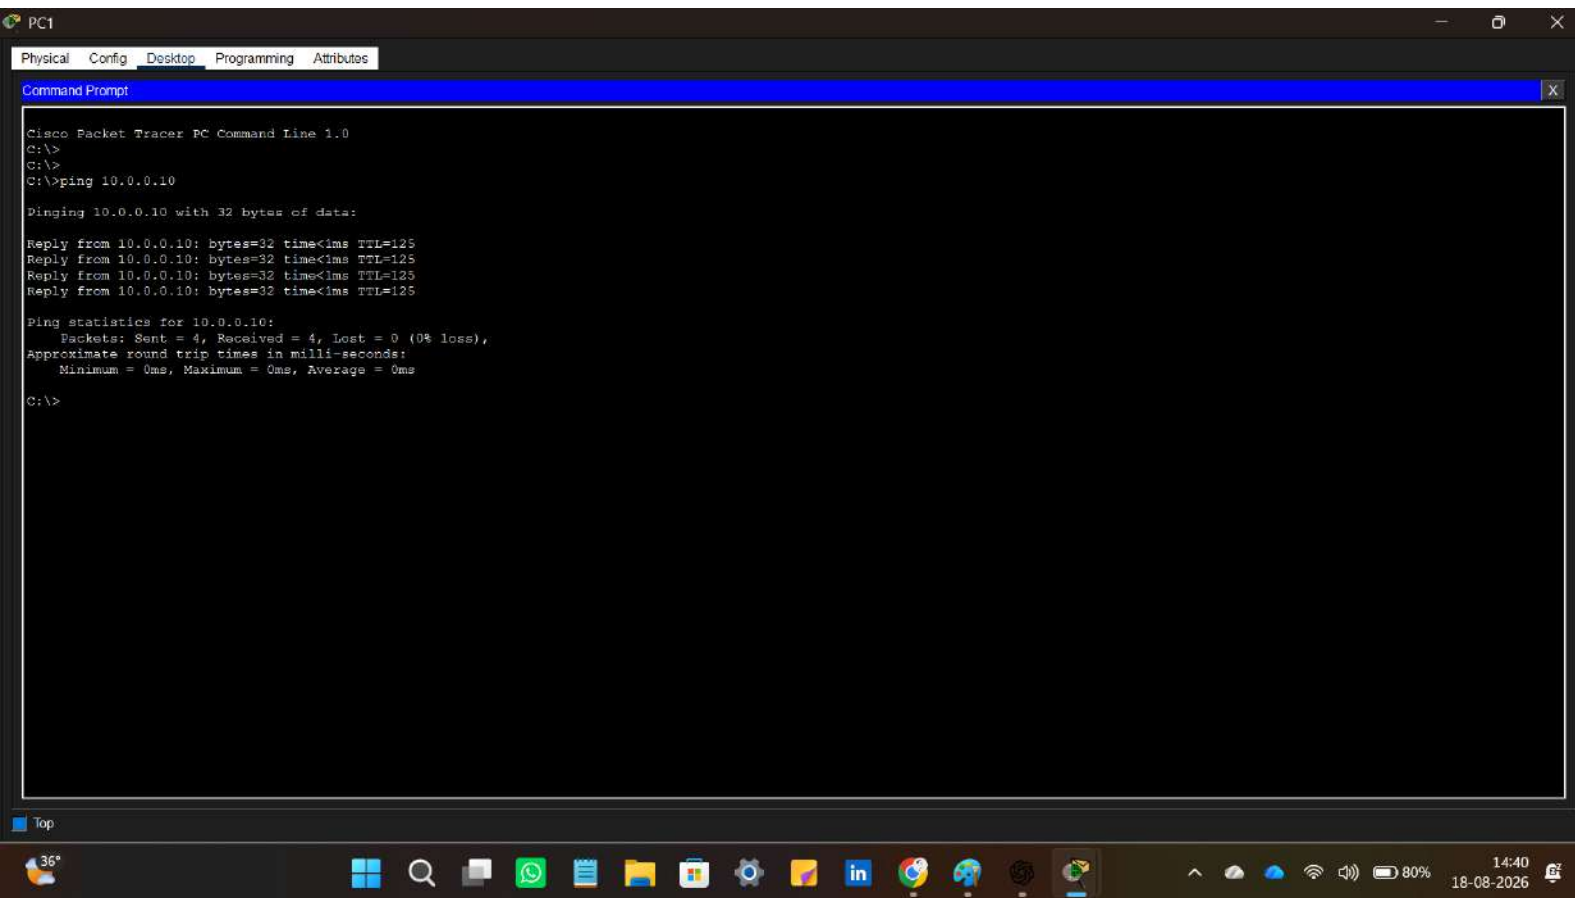

PC0

Physical Config Desktop Programming Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Request timed out.
Reply from 40.0.0.10: bytes=32 time=12ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=10ms TTL=125

Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 12ms, Average = 7ms

C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=11ms TTL=125
Reply from 40.0.0.10: bytes=32 time<1ms TTL=125
Reply from 40.0.0.10: bytes=32 time=11ms TTL=125

Ping statistics for 40.0.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 11ms, Average = 5ms

C:\>

Top

36°



14:39
18-08-2026

81%

Router0

Physical Config CLI Attributes

```
Success: no error result is not set
C 10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 10.0.0.0/8 is directly connected, GigabitEthernet0/0/0
L 10.0.0.1/32 is directly connected, GigabitEthernet0/0/0
C 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, GigabitEthernet0/0/1
L 20.0.0.1/32 is directly connected, GigabitEthernet0/0/1
R 30.0.0.0/8 [120/1] via 20.0.0.2, 00:00:05, GigabitEthernet0/0/1
R 40.0.0.0/8 [120/2] via 20.0.0.2, 00:00:05, GigabitEthernet0/0/1

Router#ping 10.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/2/9 ms

Router#ping 20.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 20.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 8/10/16 ms

Router#ping 30.0.0.1
Translating "ping30.0.0.1"...domain server (255.255.255.255) % Name lookup aborted
Router#ping 30.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 30.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router#ping 40.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 40.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/3 ms

Router#
```

Copy Paste

Top

36°

18-08-2026 14:52

75%

Router1

Physical Config CLI Attributes

```
2 previous downloaded static route

Gateway of last resort is not set

R 10.0.0.0/8 [120/1] via 20.0.0.1, 00:00:00, GigabitEthernet0/0/0
   20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   20.0.0.0/8 is directly connected, GigabitEthernet0/0/0
L   20.0.0.2/32 is directly connected, GigabitEthernet0/0/0
   30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C   30.0.0.0/8 is directly connected, GigabitEthernet0/0/1
L   30.0.0.1/32 is directly connected, GigabitEthernet0/0/1
R 40.0.0.0/8 [120/1] via 30.0.0.2, 00:00:09, GigabitEthernet0/0/1

Router#ping 10.0.0.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router#ping 20.0.0.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 20.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router#ping 30.0.0.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 30.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/6/10 ms

Router#ping 40.0.0.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 40.0.0.1, timeout is 2 seconds:
!!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/3 ms

Router#
```

Copy Paste

Top

36°

18-08-2026 14:47

77%

Router2

Physical Config CLI Attributes

```
Gateway of last resort is not set

R 10.0.0.0/8 [120/2] via 30.0.0.1, 00:00:05, GigabitEthernet0/0/0
R 20.0.0.0/8 [120/1] via 30.0.0.1, 00:00:05, GigabitEthernet0/0/0
  30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, GigabitEthernet0/0/0
L 30.0.0.2/32 is directly connected, GigabitEthernet0/0/0
L 40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 40.0.0.0/8 is directly connected, GigabitEthernet0/0/1
L 40.0.0.1/32 is directly connected, GigabitEthernet0/0/1

Router#ping 10.0.0.10
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.10, timeout is 2 seconds:
!!!!
Success rate is 80 percent (4/5), round-trip min/avg/max = 0/0/1 ms

Router#
Router#ping 20.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 20.0.0.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router#ping 30.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 30.0.0.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router#ping 40.0.0.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 40.0.0.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/3/8 ms

Router#
```

Copy Paste

Top

36°

18-08-2026 14:45

78%

Router0

Physical Config CLI Attributes

--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTRL/Z.
Router(config)#int g0/0/0
Router(config-if)#ip add 10.0.0.1 255.0.0.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up

Router(config-if)#
Router(config-if)#ex
Router(config)#int g0/0/1
Router(config-if)#ip add 20.0.0.1 255.0.0.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/1, changed state to up
ex
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/1, changed state to up

Router(config)#
Router(config)#
Router(config)#router rip
Router(config-router)#network 10.0.0.0
Router(config-router)#network 20.0.0.0
Router(config-router)#ex
Router(config)#

Copy Paste

Top

36°

14:40
18-08-2026

Router1

Physical Config CLI Attributes

```
--- System Configuration Dialog ---
Would you like to enter the initial configuration dialog? [yes/no]: n

Press RETURN to get started!

Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g0/0/0
Router(config-if)#ip add 20.0.0.2 255.0.0.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/0, changed state to up
sn
Router(config)# int g0/0/1
Router(config-if)#ip add 30.0.0.1 255.0.0.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/1, changed state to up

Router(config-if)#ex
Router(config)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/1, changed state to up

Router(config)#
Router(config)#
Router(config)#router rip
Router(config-router)#network 20.0.0.0
Router(config-router)#network 30.0.0.0
Router(config-router)#
```

Copy Paste

Top

36°

80%

14:41
18-08-2026

Router2

Physical Config CLI Attributes

```
Router(config-if)#
Router(config-if)#ex
Router(config)#int g0/0/1
Router(config-if)#ip add 40.0.0.1 255.0.0.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0/1, changed state to up
ex
Router(config)#router rip
Router(config-router)#network 30.0.0.0
Router(config-router)#network 40.0.0.0
Router(config-router)#ex
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
Router#show ip route brief
Translating "brief"...domain server (255.255.255.255)
% Invalid input detected

Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2, F - EGP
        i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
        * - candidate default, U - per-user static route, o - ODR
        P - periodic downloaded static route

Gateway of last resort is not set

R    10.0.0.0/8 [120/2] via 30.0.0.1, 00:00:05, GigabitEthernet0/0/0
R    20.0.0.0/8 [120/1] via 30.0.0.1, 00:00:05, GigabitEthernet0/0/0
     30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     30.0.0.0/8 is directly connected, GigabitEthernet0/0/0
L     30.0.0.2/32 is directly connected, GigabitEthernet0/0/0
L     40.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
```

Copy Paste

Top

36°

18-08-2026 14:43

79%