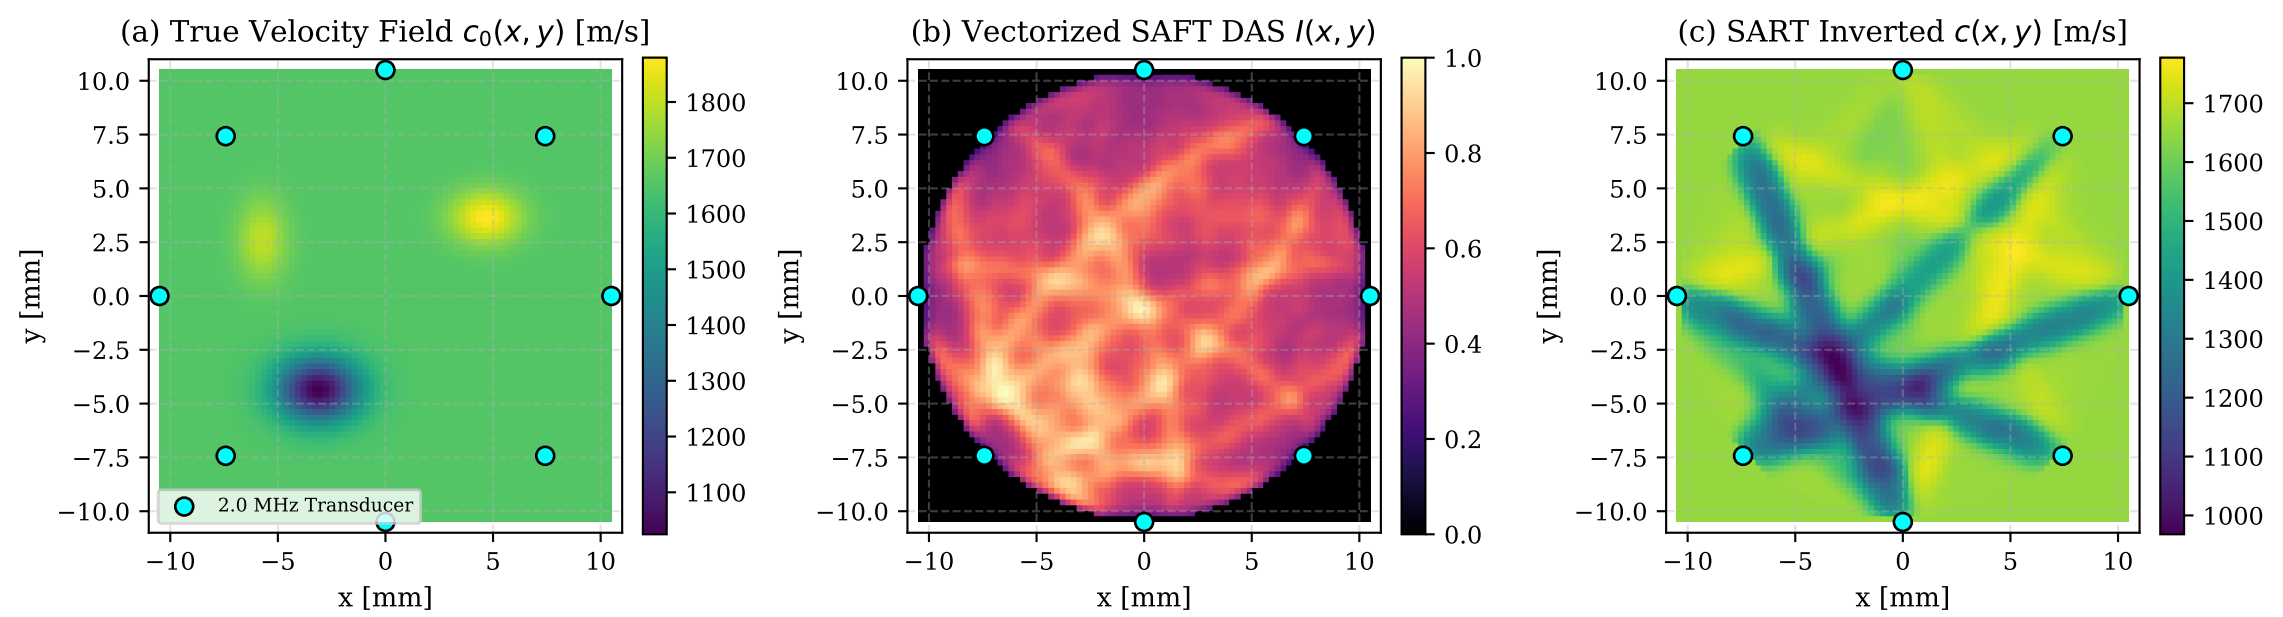

(a) True Velocity Field $c_0(x, y)$ [m/s]
(b) Vectorized SAFT DAS $I(x, y)$
(c) SART Inverted $c(x, y)$ [m/s]
2.0 MHz Transducer
x [mm]
y [mm]