

Matias Faldo

HOJA N°

1/3

FECHA

1. Indicar toma de tiempos.

SI tiene consistencia estadística.

OP 1 = 3,2 $\frac{min}{U}$

OP 2 =

	T ₀	V	T _B	[seg]	R
S46	99	110	108,9		28
	114	95	108,3		
	103	105	108,15		
	127	85	107,95		
	103	105	108,15		
S14	107	105	107,1		9
	108	100	108		
	99	110	108,9		
	102	105	107,1		
	103	105	108,15		
S04	102	105	107,1		24
	90	120	108		
	114	95	108,3		
	108	100	108		
	90	120	108		

$$T_B = \frac{\sum T_B}{15} = \frac{1714,15}{15} = 114,27 \text{ seg}$$

$$\bar{R} = \frac{28+9+24}{3} = 20,33$$

$$\bar{T}_0 = \frac{\sum T_0}{15} = \frac{1564}{15} = 104,26$$

$$Z = \frac{\bar{R}}{\bar{T}_0} = \frac{20,33}{104,26} \times 100 = 19,5\%$$

Verifica en el gráfico

el suplemento es el 11% $\rightarrow 1,9045 \text{ min} \times 1,11\%$

$$TTA \text{ OP 2} = 2,11 \frac{\text{min}}{U}$$

Suplemento → No tiene la OP3

Jornada 7 h 15 min

Velocidad 80 en el OP3

$$OP3 = 4 \frac{min}{u} \text{ Tiempo Obs } \times 0,8 = 3,2 \frac{min}{u}$$

$$OP4 \rightarrow 1000 \frac{CM}{\text{Lote}} =$$

$$100 CM = 1 min$$

Capacidad


$$OP1 = 3,2 \frac{min}{u} = \frac{18,75}{h} = 9,375 \frac{PT}{h}$$

$$OP2 = 2,11 \frac{min}{u} = 28,43 \frac{P/h}{h} = 14,215 \frac{PT}{h}$$

$$OP3 = 3,2 \frac{min}{u} = 18,75 \frac{P/h}{h} = 6,25 \frac{PT}{h}$$

$$OP4 = 1000 \frac{mm}{\text{Lote}} = 6 \frac{P/h}{h} = 6 \frac{PT}{h}$$

cuello botella

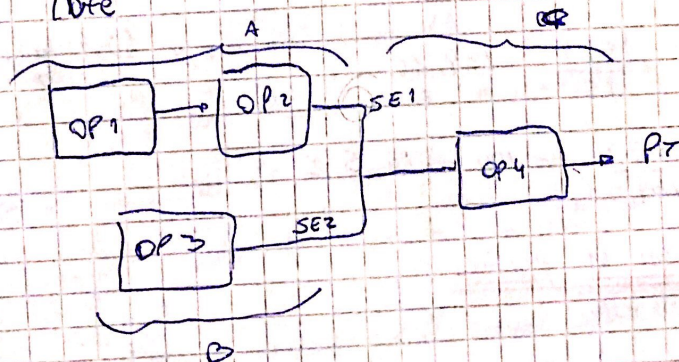

A y B = TUNDO MAÑANA

C = Noche

Lo que se fabrica en el día se consume en el día.

$$PT = \begin{matrix} 2 SE1 \\ 3 SE2 \end{matrix}$$

NOTA

$$\text{Producción} = \frac{7 \text{ h}}{\text{d/a}} \times \frac{6 \text{ PT}}{\text{h}} = 42 \frac{\text{PT}}{\text{d/a}}$$

$$\text{Rechazo} = \frac{4 \text{ PT}}{\text{d/a}} \times \frac{1 \text{ PT} \times \text{d/a}}{\text{PT}} = 4$$

$$\text{CANT. d/a} = \frac{42 \text{ PT}}{\text{d/a}} \times 4 \text{ d/a} = 168 \text{ PT}$$

$$\text{Le SACO los PT Rechazo} \times \text{d/a} = 4$$

$$2. \text{ Entrega } \underline{164 \text{ PT al 4to d/a}}$$

$$3. \text{ Productividad} = \frac{\text{Unid Prod}}{\text{MO Recurso Utilizado}} = \frac{164}{84.59} = 1.94$$

$$\text{OP1} = \frac{9.375 \text{ PT}}{\text{h}} \times \frac{1 \text{ h}}{\text{PT}} = 9.375 \text{ h}$$

$$\text{OP1} = \frac{168 \text{ PT}}{\text{h}} \times \frac{1 \text{ h}}{\text{PT}} = 168 \text{ h}$$

$$\text{OP2} = \frac{14.215 \text{ PT}}{\text{h}} \times \frac{1 \text{ h}}{\text{PT}} = 14.215 \text{ h}$$

$$\text{OP3} = \frac{6.25 \text{ PT}}{\text{h}} \times \frac{1 \text{ h}}{\text{PT}} = 6.25 \text{ h}$$

$$\text{OP4} = \frac{6 \text{ PT}}{\text{h}} \times \frac{1 \text{ h}}{\text{PT}} = 6 \text{ h}$$

$$\text{Tiempo operación} = \sum \text{Tiempo operaciones} = 84.59 \text{ h}$$

$$\text{Productividad} = \frac{164 \text{ U}}{84.59 \text{ h} \times 50 \frac{\text{h}}{\text{U}}} = 0.38 \frac{\text{U}}{\text{h}}$$

4. Desperdicio % $M_1 - M_2$

MP = 25 kg x 1681 g

SE1 = 1 pieza — 600 gr PN

$$\text{---} \rightarrow \text{MPI} = 420 \text{ J} = 0,42 \text{ kJ} \times \text{piętn}$$

$$\text{MP}_2 = 180 \text{ g} = 0,18 \text{ kg} \times 1000$$

SEZ = 1 pscza $\rightarrow$ 400 gr, PV

$\hookrightarrow M_{PI} = 180 \text{ gr} \rightarrow \text{densidade} = 0,018 \text{ kg}$

$L_{MP2} = 220 \text{ yr} \rightarrow \text{dependencia} = 0,0264 \text{ yr}$

Dist: 168 px $\rightarrow$ 336 SE1
504 SE2

SE2 $\rightarrow$ IP $\rightarrow$ 0.0264 kg MP-2

504 — x — 13,30 kg desperdício MP2

501 1P — 0,018 g MP

504 p — x — 9,072 kg MI

SEL — 1P — 0,042 kg desp 171

168, — X → 7,056 kg M1

1P — 0,010 kg 112 dependuuo

168 — X $\rightarrow$ 3,024 kg


ΣM_1 despendicio = ~~28,305~~ $16,12 \text{ Kp}$

ΣM_2 dependico = 16,324 kg

$$\% \text{ Desperdicio} \rightarrow M.I = \frac{16,12}{25} \cdot 100 = 64,48 \%$$

$$\rightarrow M_2 = \frac{16,324}{25} \cdot 100 = 65,29\%$$

NOTA

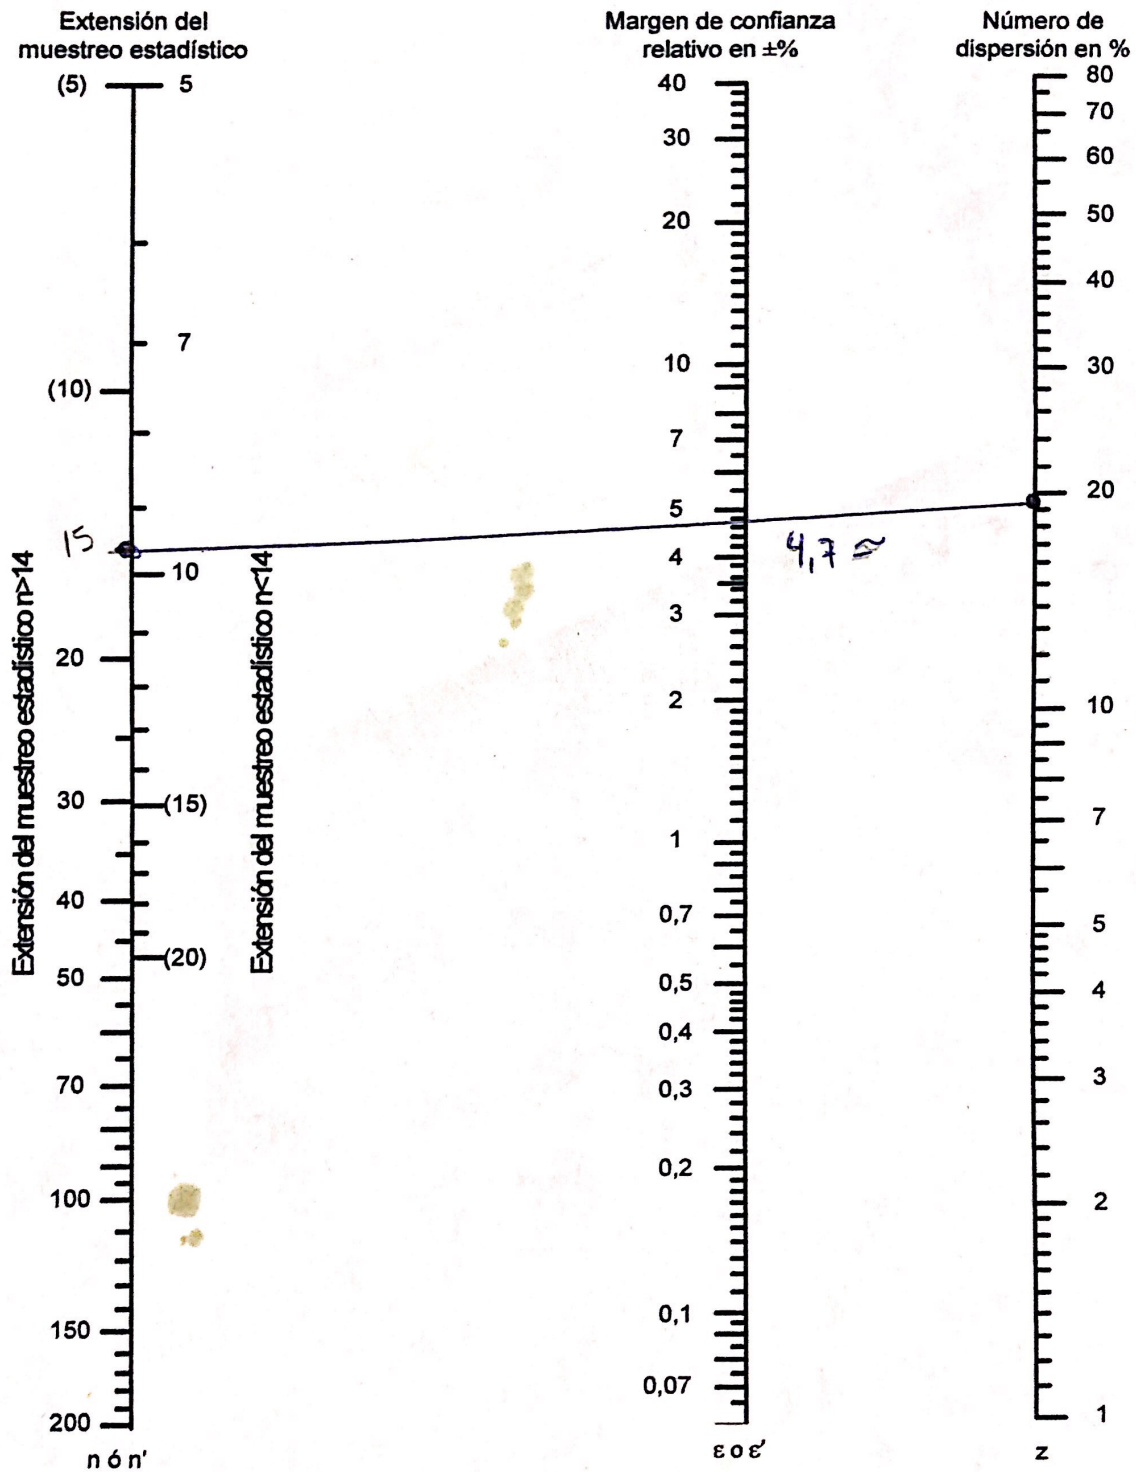

[Handwritten signature]