



## Bora



1W Standby



Compact Design



Comfortable Sleep Mode



LED Display



Timer



Auto Clean



Automatic Operation



'Turbo' Button



Clock Display



Self-diagnosis



Auto Restart



Lock



Healthy Filters



Golden Fin



Cold Plasma



I Feel

Features: ● Standard ● Optional

## Wall-mounted type




### ► High energy efficiency

High energy efficiency to 4.51




### ► Low noise

The noise is lower to 23dB (A)

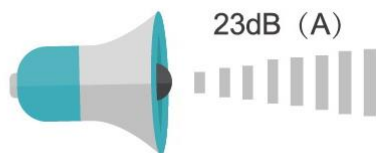

### ► Super low power

With the minimum power 315W, it is much lower than the normal unit which is 390W.

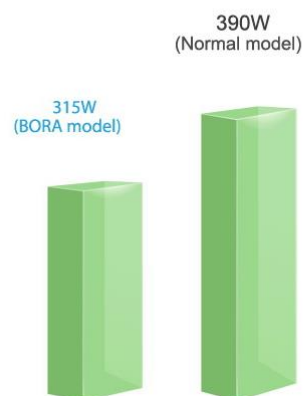

### ► 170V low voltage start up

The unit could operate from 170V to 265V, which is suitable for unstable power supply areas.



Model			GWC12AAC-K6NNA5A	GWC18AAD-K6NNA5A	GWC24AAE-K6NNA5A
Function			Cooling	Cooling	Cooling
Capacity	Cooling	Btu/h	12000	18000	24000
	Heating	Btu/h	/	/	/
EER/C.O.P			3.40	3.4	3.40
Power Supply			1Ph,220-240V,50Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz
Power Input	Cooling	W	1034	1550	2068
	Heating	W	/	/	/
Rated Current	Cooling	A	7.5	11	14.67
	Heating	A	/	/	/
Airflow Volume	Indoor	$\frac{m^3/h}{(SH/H/M/L)}$	650/560/480/370	900/850/750/600	1200/1060/930/800
Indoor Unit					
Sound Pressure Level	Indoor	$\frac{dB(A)}{(SH/H/M/L)}$	40/38/32/27	47/44/40/34	51/47/44/37
Outline Dimension	WxHxD	mm	849×289×210	970X300X225	1078×325×246
Package Dimension	WxHxD	mm	902×279×357	1020X295X369	1145×330×400
Net Weight/Gross Weight	Indoor	kg	10.5/12.5	13.5/16.5	16.5/20
Outdoor Unit					
Sound Pressure Level	Outdoor	dB(A)	49	53	53
Piping Connection	Gas	mm	φ12	φ6	φ16
	Liquid	mm	φ6	φ12	φ6
Outline Dimension	WxHxD	mm	848×540×320	899×596×378	904×646×373
Package Dimension	WxHxD	mm	881×595×363	948×645×420	963×695×411
Net Weight/Gross Weight	Outdoor	kg	29.5/32	42/45	50/53.00
Loading Quantity	40'GP	sets	200	164	136
	40'HQ	sets	241	187	156

1.The product with \* is under development, and the parameters are estimated, please refer to the value on nameplates.  
2.Gree reserves the right to modify the specifications without prior notice. Please confirm the final specifications with sales representatives.