

## U-Crown

 Wifi Control	 Light Function	 R410A	 Auto Clean	 Lock	 LED Display	 LED Remote Control	 Timer	 Dehumidifying	 130° Swing Angle Left-right	 180° Swing Angle Up-down
 3D Airflow	 I Feel	 Auto Restart	 Quiet Design	 7 Fan Speeds	 4 Sleep curves	 Cold Plasma				

Features: ● Standard ● Optional


## Wall-mounted type




### ► Supply air from wide angle

With new swing motor system for the air guide, up-down and left-right air supply is available, which enable users enjoy equal comfort from different orientation.

Supply air from left-right wide angle




Supply air from up-down wide angle




### ► Automatic clean and dry


Gree air conditioner adopts a new generation of hydrophilic aluminum foil, under cooling or dehumidifying mode, dust in evaporator will be removed by the fast-moving condensate water. The blade keeps operating for air drying after power off, thus achieves automatic clean and dry. This function is available through controlling the "X-Fan" button in remote controller, caring for your health considerably.



① Water still exists in air conditioner after power off



② Air louver keeps operating



③ Keep clean and dry inside the unit


### ► R32(only for inverter)



R32

### ► WiFi intelligent control

You can control the operation of unit remotely by the APP in your smart phone, such as turning on or off the unit, setting mode and temperature, etc. For example: you can turn on the unit for cooling or heating in advance, so that you will feel comfortable when you arrive at home.

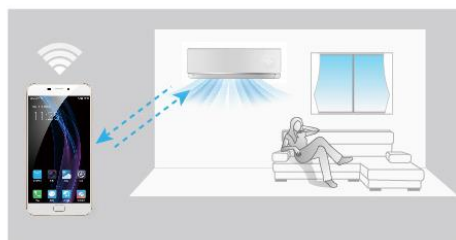



Model			GWC09UB-S6DNA4A	GWC12UB-S6DNA4A	GWC18UC-S6DNA4A
Function			Cooling	Cooling	Cooling
Capacity	Cooling	Btu/h	9000 (2150~13250)	11942 (1550~14000)	17998 (2400~21900)
	Heating	Btu/h	/	/	/
EER/C.O.P		W/W	4.30	3.98	3.52
Power Supply		Ph,V,Hz	1Ph,220-240V,50/60Hz	1Ph,220-240V,50/60Hz	1Ph,220-240V,50/60Hz
Power Input	Cooling	W	613	880	1500
	Heating	W	/	/	/
Rated Current	Cooling	A	5.63	6.73	12
	Heating	A	/	/	/
Airflow Volume	Indoor	m <sup>3</sup> /h (SH/H/HMM/L/M/L/SL)	650/530/470/400/350/300/290	650/530/470/400/350/300/290	900/750/650/600/500/400/340
Indoor Unit					
Sound Pressure Level	Indoor	dB(A) (SH/H/HMM/L/M/L/SL)	40/34/31/27/25/22/21/19	42/36/33/28/25/22/20	44/39/36/33/28/25/23/22
Outline Dimension	WxHxD	mm	860×305×170	860×305×170	960×320×205
Package Dimension	WxHxD	mm	935×295×388	935×295×388	1043×333×403
Net Weight/Gross Weight	Indoor	kg	11.5/14	11.5/14	14/17
Outdoor Unit					
Sound Pressure Level	Outdoor	dB(A)	62	62	66
Piping Connection	Gas	mm	φ9.52	φ9.52	φ12
	Liquid	mm	φ6	φ6	φ6
Outline Dimension	WxHxD	mm	848×596×320	848×596×320	965×700×396
Package Dimension	WxHxD	mm	881×645×363	881×645×363	1029×750×458
Net Weight/Gross Weight	Outdoor	kg	32.4/35.5	32/35	44.5/49
Loading Quantity	40'GP	sets	186	186	123
	40'HQ	sets	216	216	141

1.The product with \* is under development, and the parameters are estimated, please refer to the value on nameplates.  
2.Gree reserves the right to modify the specifications without prior notice. Please confirm the final specifications with sales representatives.