



Lomo

										
Comfortable Sleep Curves	LED Display	Timer	Auto Clean	'Turbo' Button	Self-diagnosis	Dehumidifying	Auto Restart	Intelligent Auto Restart	Healthy Filters	3D Airflow
										
Cold Plasma	I Feel	Energy Saving	8°C Heating	Intelligent Defrosting	Cold Air Prevention	0.5W Standby	Golden Fin			


Features:  Standard  Optional

Wall-mounted type



▶ Turbo cooling

Press "Turbo " button on remote controller to enjoy a larger air flow, which enables the indoor temperature to reach the set temp in a shorter time.

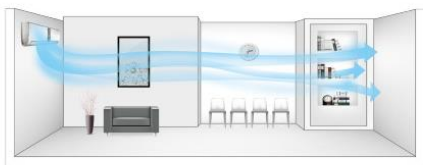

▶ Adjustable memory

Adjustable memory function is available through controlling remote controller, conduct setting flexibly according to user' s usage habit.



▶ Fast cooling and heating

Within 30min after power on, if the difference between ambient temperature and setting temperature is quite big, then the compressor would operate in high frequency, thus cooling or heating room temperature quickly.




▶ Refrigerant leakage protection

When Refrigerant is insufficient and the valve is blocked, indoor unit of air conditioner will display F0 malfunction and stop operation. This function effectively protects the whole unit and safeguard the compressor against any damages occurred due to high temperature result in fluorine leakage.



► High density filter

Higher density filter than normal filter, preventing tiny dust and pollen in air from entering into the unit efficiently, keeping you away from dust particle and enjoying healthy natural wind at any time.

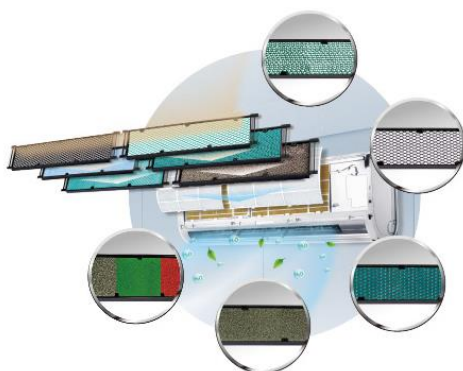

► Anticorrosive Appearance

Gree anticorrosive air conditioner possesses anticorrosive property in both performance and appearance, which is a special air conditioner that applies a series of manufacturing technics with strong pertinence. Such air conditioner can be widely used in insularity, littoral regions and some industrial areas with strong corrosiveness.



Anti-corrosion ODU

Normal ODU

► Automatic clean and dry

Gree air conditioner adopts a new generation of hydrophilic aluminum foil, under cooling or dehumidifying mode, dust in evaporator will be removed by the fast-moving condensate water. The blade keeps operating for air drying after power off, thus achieves automatic clean and dry. This function is available through controlling the "X-Fan" button in remote controller, caring for your health considerably.




① Water still exists in air conditioner after power off

② Air louver keeps operating

► Golden fin for high anti-corrosive

The salt spray proofing and anti-corrosion ability of gold fin is greatly enhanced and is almost twice stronger than other anti-corrosion products, reaching the world leading level.



Model			GWC09QB-K6NNA1A	GWC12QC-K6NNA1A	GWC15QD-K6NNA1B	GWC18QD-K6NNA1A	GWC24QE-K6NNA1A
Function			Cooling	Cooling	Cooling	Cooling	Cooling
Capacity	Cooling	Btu/h	9000	12000	15013	18000	24000
	Heating	Btu/h	/	/	/	/	/
EER/C.O.P			W/W	3.40	3.40	3.40	3.40
Power Supply			Ph,V,Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz	1Ph,220-240V,50Hz
Power Input	Cooling	W	776	1034	1294	1550	2068
	Heating	W	/	/	/	/	/
Rated Current	Cooling	A	5.3	7.5	10	11	14.67
	Heating	A	/	/	/	/	/
Airflow Volume	Indoor	m ³ /h (SH/H/M/L)	550/490/430/370	660/540/460/330	900/850/750/600	900/850/750/600	1200/1060/930/800
Sound Pressure Level	Indoor	dB(A) (SH/H/M/L)	39/36/32/25	40/38/32/26	47/43/39/34	47/44/40/34	51/47/44/37
Outline Dimension	WxHxD	mm	790×275×200	845×289×209	970×300×224	970×330×224	1078×325×246
Package Dimension	L×W×H	mm	866×271×367	921×281×379	1041×383×320	1041×383×320	1148×413×350
Net Weight/Gross Weight	Indoor	kg	9/11	10.5/12.5	13.5/16.5	13.5/16.5	16.5/20
Sound Pressure Level	Outdoor	dB(A)	48	49	50	53	53
Piping Connection	Gas	mm	φ9.52	φ12	φ12	φ6	φ16
	Liquid	mm	φ6	φ6	φ6	φ12	φ6
Outline Dimension	WxHxD	mm	776×540×320	848×540×320	848×540×320	899×596×378	904×646×373
Package Dimension	L×W×H	mm	823×358×595	881×363×595	881×363×595	948×420×645	963×411×695
Net Weight/Gross Weight	Outdoor	kg	25.5/28	29.5/32	35.0/37.5	42/45	50/53.00
Loading Quantity	40'GP	sets	224	196	173	156	144
	40'HQ	sets	262	240	208	179	164

1.The product with * is under development, and the parameters are estimated , please refer to the value on nameplates.
2.Gree reserves the right to modify the specifications without prior notice. Please confirm the final specifications with sales representatives.