debug: PASS With debug_in Set to 0

PHASE	TEST	STATUS
Phase 2	debug	DIAGNOSTIC PASS

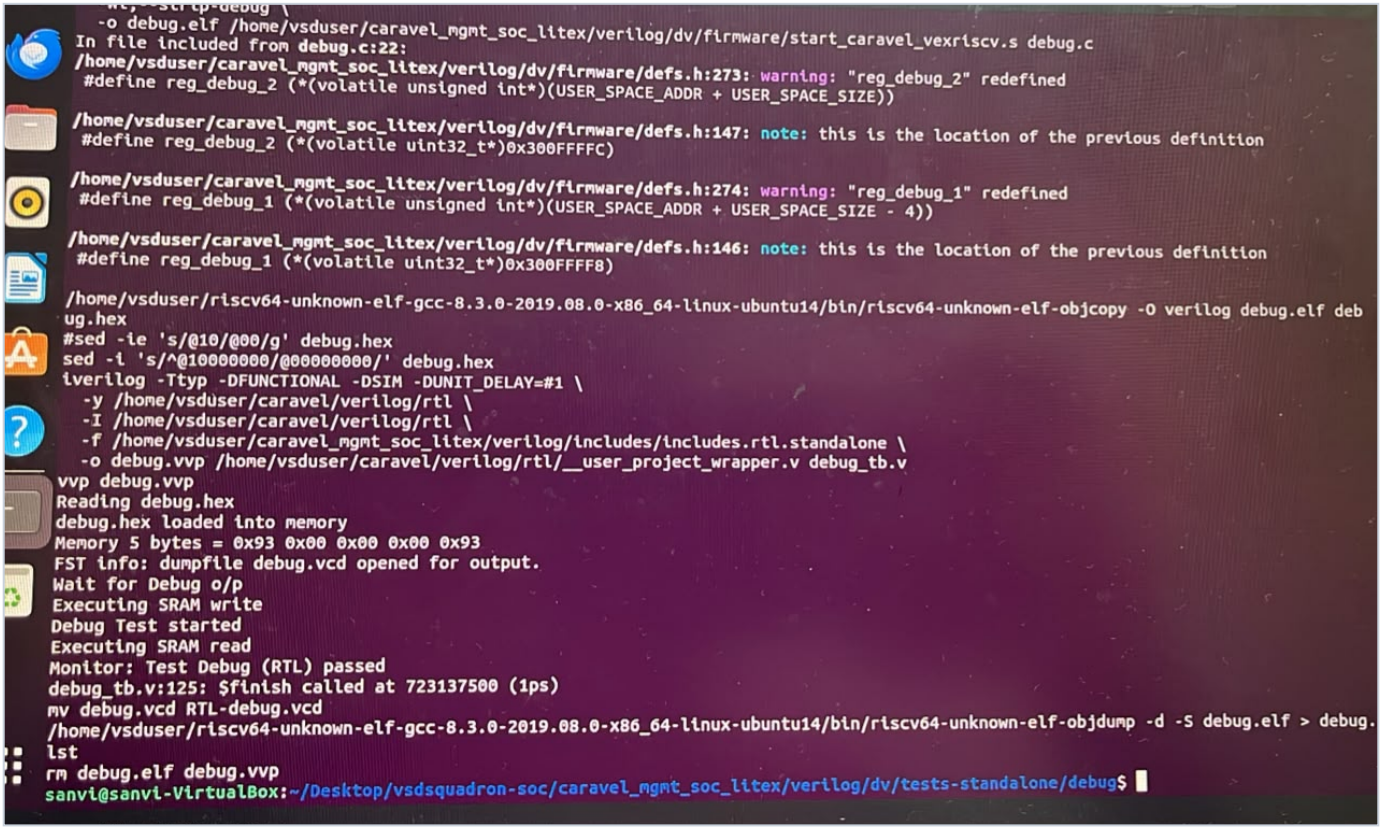


Figure 14. Backup copy of debug_tb.v with debug_in = 1'b1 changed to debug_in = 1'b0

What this shows

- `Monitor: Test Debug (RTL) passed` at 723,137,500 ps (about 0.72 ms), `debug_tb.v` line 125.
- Only the `debug_in` value was changed. The original testbench was restored afterwards.
- Why the held-high pin stops the firmware, and whether the original testbench intended it, is not confirmed.

Conclusion. Holding debug_in high from the start prevents the firmware from finishing. With it at 0, the test passes.