PKM22EPPH4001-B0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of PKM22EPPH4001-B0 from the official website of Murata
https://pim.murata.com/en-us/pim/details/?partNum=PKM22EPPH4001-B0

To be discontinued

PKM22EPPH4001-B0

RoHS REACH

Last Time Order Due	End of Production	Alternative Products
3/31/2027	9/30/2027	

Applications

Unsuitable Applications	Please be sure to read and comply with these "Precautions for use".
Specific Applications	Consumer equipment,Industrial Equipment Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PKM22EPPH4001-B0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of PKM22EPPH4001-B0 from the official website of Murata
https://pim.murata.com/en-us/pim/details/?partNum=PKM22EPPH4001-B0

Appearance & Shape



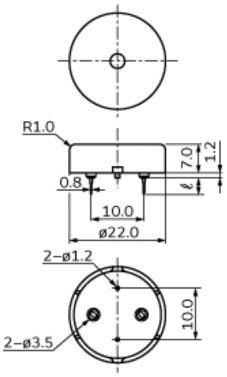

Part Number	ℓ
PKM22EPPH4001-B0	6.5
PKM22EPPH4002-B0	3.5

Tol.: ±0.5
(in mm)

Size	22.0×8.2 mm

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PKM22EPPH4001-B0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of PKM22EPPH4001-B0 from the official website of Murata
https://pim.murata.com/en-us/pim/details/?partNum=PKM22EPPH4001-B0

Specifications

Oscillation circuits	Not built-in
Frequency	4.0kHz
Sound Pressure Level	87dB Typ. [±1.5Vo-p,4.0kHz,square wave,10cm]
Capacitance	12nF ±30% [1kHz]
Maximum input voltage	±15.0Vo-p max.
Operating Temperature	-20～70℃
Storage Temperature	-30～80℃
Shape	Lead
Lead Shape	Pin type
Lead length	Lead length:6.5mm
Drive Type	External Drive
EIAJ Part Number	PS-RP2-C22-40

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PKM22EPPH4001-B0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of PKM22EPPH4001-B0 from the official website of Murata
https://pim.murata.com/en-us/pim/details/?partNum=PKM22EPPH4001-B0

Features

Externally driven piezoelectric sounders are used in digital watches, electronic calculators, telephones and other equipment. They are driven by a signal (ex.: 2048Hz or 4096Hz) from an LSI and provide melodious sound.

Features

1. Low power consumption
2. No noise and high reliability

References

Packaging	Specifications	Standard Packing Quantity
-B0	Bulk	900

Mass(Typ.)	
1 piece	2,864mg


Attention
1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PKM22EPPH4001-B0


Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of PKM22EPPH4001-B0 from the official website of Murata
https://pim.murata.com/en-us/pim/details/?partNum=PKM22EPPH4001-B0

Product Data

The following are examples of externally driven circuits.
(1) Unstable multi-vibrator using Tr.
(2) Circuits using inverters or NAND gates.

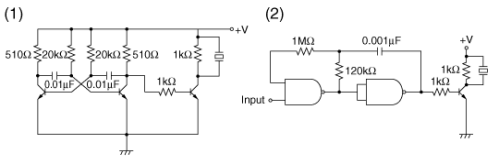

Recommended Circuit

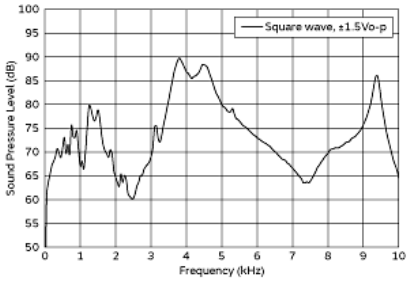

Frequency Response

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.