
Reverse Bared Circuits

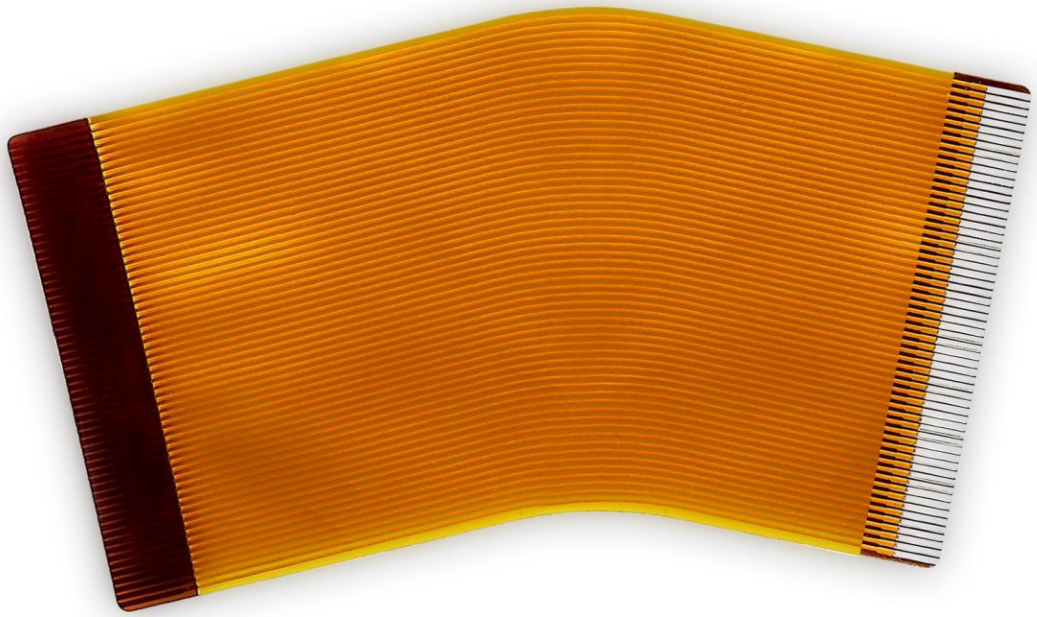

Flexible Circuits

OVERVIEW

SINGLE SIDED CIRCUITS

DOUBLE SIDED CIRCUITS

MULTI-LAYERED CIRCUITS

FLAT FLEXIBLE CIRCUITS

SCULPTED FINGER CIRCUITS

REVERSE BARED CIRCUITS

BARE FLEXIBLE CIRCUITS

EXTRA-LONG FLEX PRINTED CIRCUITS

REQUEST A QUOTE

IPC SPECIFICATIONS

COPPER TRACE CAPACITIES

Reverse Bared Circuits

Reverse bared flexible circuits are also a unique member of the flexible circuit family. They consist of a “single” conductive layer and two insulating layers very much like a single sided circuit. The unique difference is that the base material layer is cut out to allow exposed traces/pads on both sides similar to a double sided circuit. This allows us to create circuits with connector pads on both sides which eliminate the need to twist the circuit. Also, this construction allows component attachment on both sides for applications such as backlight panels. These circuits are the thinnest of the flexible circuit family with an overall thickness range of 3.7 (.0037”) to 5.4 (.0054”) mils typically. All component types can be attached to reverse bared circuits and current carrying capabilities of signal traces range from a few milliamps to several amps.

Some Key Points

- More complex than typical single sided circuits, but less cost than double sided circuits
- Thin and light weight, yet durable enough for any application
- Wide operating temperature range from -55°C - 150°C
- Mount all component types – surface mount (SMT), thru – hole, crimp on pins, wire bond, BGA

- Meets IPC-6013 Qualifications and Performance Specifications for Flexible Printed Boards

Design Capabilities

- Layer Count: 1 conductive layer
- Connector Pitch: 0.3mm, 0.5mm, 1.0mm typical
- Hole Size: .008” drilled not plated typical, .004” laser drilled non-typical
- Copper Thickness: ¼ oz, ½ oz, 1 oz, 2 oz typical
- Material thickness: 1 mil, 2 mil typical, 3 mil and 5 mil non-typical
- FR4 Stiffener Thickness: .010” - .125”
- Polyimide Stiffener Thickness: .002” - .010”

Industries Served



Medical



Transportation

Industrial

Consumer Electronics

Aerospace

We Can Help!

Receive a quote for most projects within 24 hours. Engineers respond to your inquiry and are available to answer questions and discuss design specifications.

Your Name

Work Email

Phone

Your Message

Upload File

Choose File no file selected

Verify you are human

CLOUDFLARE

Privacy • Help

SUBMIT INFORMATION

TRAMONTO PDF BROCHURE!

Copyright

© 2026 Tramonto Circuits
All rights reserved.

Cazarin Interactive

Contact

Tramonto Circuits

14524 61st St Court N
Stillwater, MN 55082

877.777.1977

info@tramontocircuits.com

Useful Links

About Us

Printed Circuit Technologies

Capabilities and Services

Market Experience

Our Process

Resources

Conflicting Materials Report

Sam.gov Registration

Social