
RIGIFLEX TECHNOLOGY, INC.


Manufacturers of Rigid, Flex and Rigid-Flex Circuit Boards

(714) 688-1500 (tel:7146881500) pcboards@rigiflex.com (mailto:pcboards@rigiflex.com)


Flex & Rigid-Flex PCBs.. 1-5 Day Quick Turn

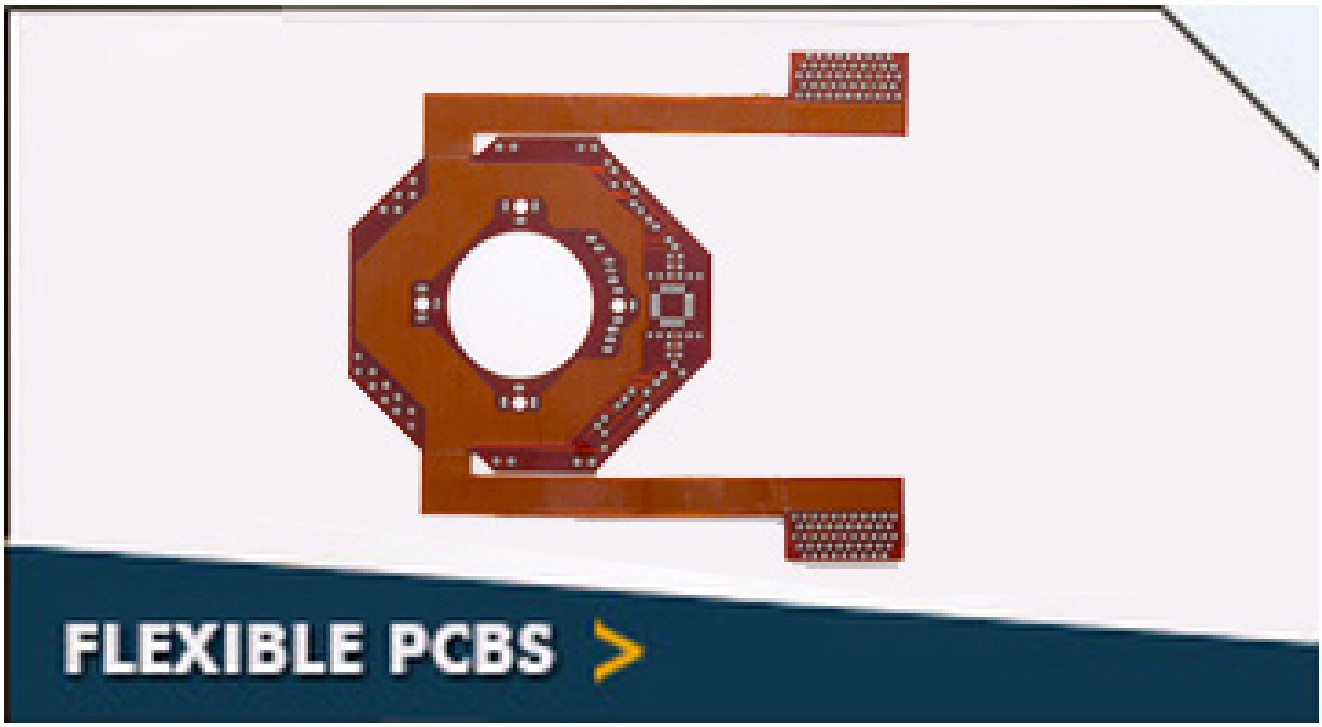

(https://www.rigiflex.com/products-services/flexible-pcb/)

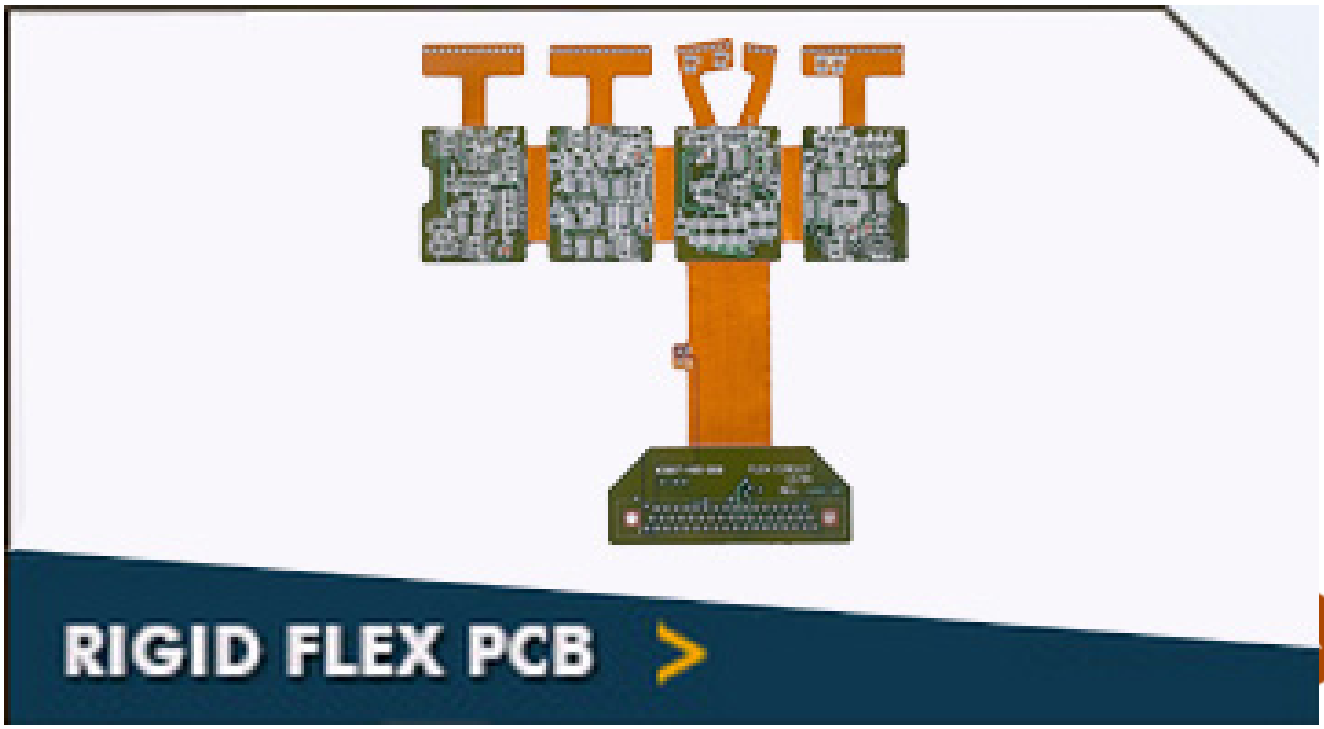


(https://www.rigiflex.com/products-services/rigid-flex-pcb/)

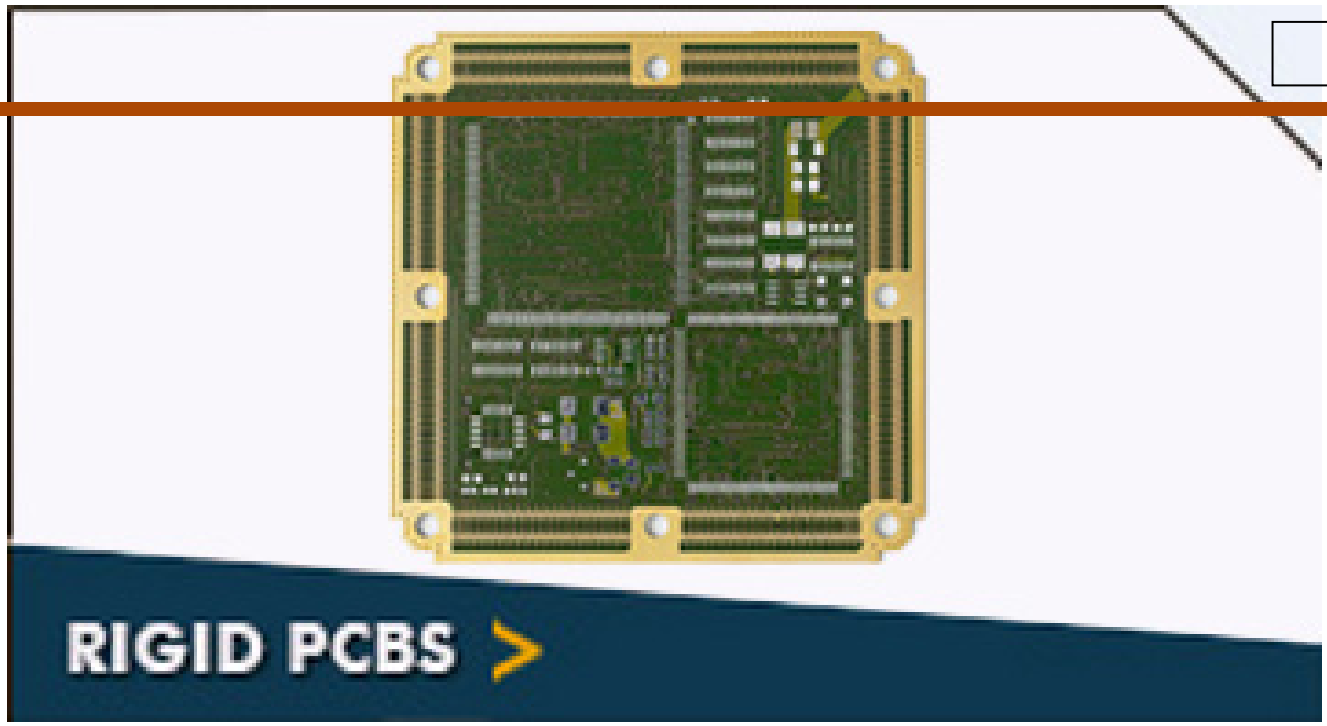

(https://www.rigiflex.com/products-services/rigid-pcb/)

Superior & Trusted Flexible, Rigid-Flex & Rigid PCBs for Over 25 years

6 Layer Rigid Flex Circuit Board Polyimide



(https://www.rigiflex.com/wp-content/gallery/6-layer-polyimide/portfolio_group_Rigid-PCB-05_original_1.png?t=1423032950)

At Rigiflex, we manufacture high-quality printed circuit boards (PCBs) of different types. One such most popular type of PCBs that we provide is the 6 layer rigid-flex polyimide circuit board. For manufacturing these PCBs, we make use of the FR4 and TG135 as the base materials of these boards. The polyimide material offers excellent mechanical properties and possess ability to resist heat. Besides this, the material is known to have some really good properties, such as thermal stability, high chemical resistance. Also, this material has an excellent tensile strength, which makes the material perfectly suited for the PCBs.

We, at Rigiflex, have the capability to manufacture rigid-flex printed circuit boards, with a total board thickness of 1.6 mm. The thermal stress that these PCBs can handle is 288 °C & 20 Sec. The finished hole size by a laser can be 5 mil, or 6 mil. We give you an option to choose from our wide ranging solder masks, which include color options like white, green, blue, black, and red. You can also select the desired silksc color from black, yellow, and white. The copper thickness of these circuit boards that we manufactur OZ. The minimum hole size that we offer is 4 mil. The peel strength of the 6 layer rigid-flex polyimide ci boards is 1.4 N/mm. We provide a vast variety of surface finish options, which include HASL, lead-free HASL, immersion gold/tin/silver, OSP, flash gold, gold fingers, plating hard gold, and peelable mask.

6 Layer Rigid Flex Circuit Board Polyimide	
Model:	6L PCB
Base Material:	6L, FR4,TG135
Board Thickness:	1.6 mm
Copper Thickness:	1OZ
Min. Hole Size:	4mil
Min. Width/Gap:	4/5 mil
Surface Finishing:	Gold

Rigid PCB Capability			
No.	Item		Technical data
1	Layer Count		1-30Layers
2	HDI Type		1+N+1, 2+N+2
3	Material		CEM3, FR-4, Halogen Free, Aluminum-based, Teflon, Rogers, Getek, Nelco, PTFE, Polyimide etc
4	Board thickness		0.2~5.0mm
5	Board Size	Max.	18"x24"
		Min.	30x50mm
6	Copper Thickness	Outer layer	1oz~6oz
		Inner layer	Hoz~5oz
7	Min. Line Width/Space		4/4mil(0.1/0.1mm)
8	Finished Hole size	Mechanical	0.20~6.30mm
		Laser	5mil, 6mil
9	Blind/buried via(Mechanical)		0.2mm (min)
10	Aspect Ratio		10:1
11	Hole Dia.Tolerance	PTH	±0.075mm(3mil)
		NPTH	±0.05mm (2mil)
12	Hole Position Tolerance		±0.05mm (2mil)
13	Bow & Twist		≤0.75%

14	Peel strength	1.4N/mm
15	Thermal stress	288°C & 20 Sec
16	Test Voltage	50-300V
17	Soldermask color	Green, Red, Blue, Black, White
18	Silkscreen color	White, Black, Yellow
19	Min. S/M Pitch	4mil(0.1mm)
20	Min. Solder Mask Clearance	0.05mm
21	Impedance Control Tolerance	+/-10%
22	Outline Tolerance	±0.10mm (4mil)
23	Surface Finish	HASL, Lead free HASL, Immersion Gold/Tin/Silver, OSP, Flash Gold, Gold fingers, Plating Hard Gold, Carbon Ink, Peelable mask

Quick Contact

All Fields are Mandatory (*)

Full Name

Email

Telephone

Type Your Message

c7d1a3

Captcha

Submit



ITAR Registered
M26780

Flex & Rigid Flex
1-5 Day Turn

Over 25 Years
In The Industry

Need it quick? That is our speciality!

FOOTER NAVIGATION

- Home (https://rigiflex.com/)
- Company Profile (https://www.rigiflex.com/company-profile)
- Customers (https://www.rigiflex.com/company-profile/customers)
- Capabilities (https://www.rigiflex.com/capabilities)
- Product & Services (https://www.rigiflex.com/products-services)
- Flexible PCB`s (https://www.rigiflex.com/products-services/flexible-pcb)
- Rigid-Flex PCB`s (https://www.rigiflex.com/products-services/rigid-flex-pcb)
- Rigid PCB`s (https://www.rigiflex.com/products-services/rigid-pcb)
- Quality & Delivery (https://www.rigiflex.com/quality-delivery)
- Industries Served (https://www.rigiflex.com/industry-served)
- Contact (https://www.rigiflex.com/contact-us)
- Privacy Policy (https://www.rigiflex.com/privacy-policy)
- PCB Quote (https://www.rigiflex.com/pcb-quote)
- FAQ (https://www.rigiflex.com/faq)
- Blog (https://rigiflex.com/blog/)
- Sitemap (https://www.rigiflex.com/sitemap)
- Case Study (https://www.rigiflex.com/case-study)
- Certifications (https://www.rigiflex.com/certifications

- XML (https://www.rigiflex.com/sitemap.xml)

FOLLOW US ON

Facebook (https://www.facebook.com/RigiflexTechnologyInc)

Twitter (https://twitter.com/rigiflextech)

1166 N. Grove Street Anaheim, CA 92806

(714) 688-1500 (tel:7146881500)

(714) 688-1505

pcboards@rigiflex.com (mailto:pcboards@rigiflex.com)

© 2025 RIGIFLEX TECHNOLOGY INC. - EXPERTS IN FLEX AND RIGID-FLEX CIRCUIT BOARDS MANUFACTURING