

Computer Networks (CL3001)



CN LAB 11

Submitted by:

Syeda Sara Ali

23K-0070



BS-AI (6A)




Submitted to:




Sir Sameer Faisal




Lab Tasks:

1. Implement the above example using OSPF. Keep all network IP addresses the same as the example. What will be the administrative distance of the routing? Use Figure 1 of the lab manual.

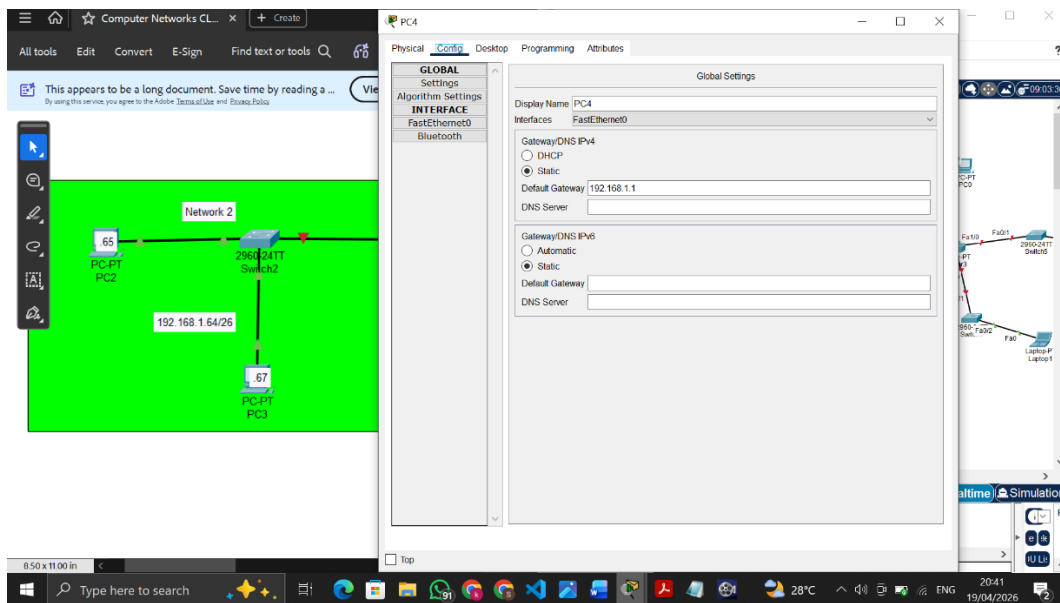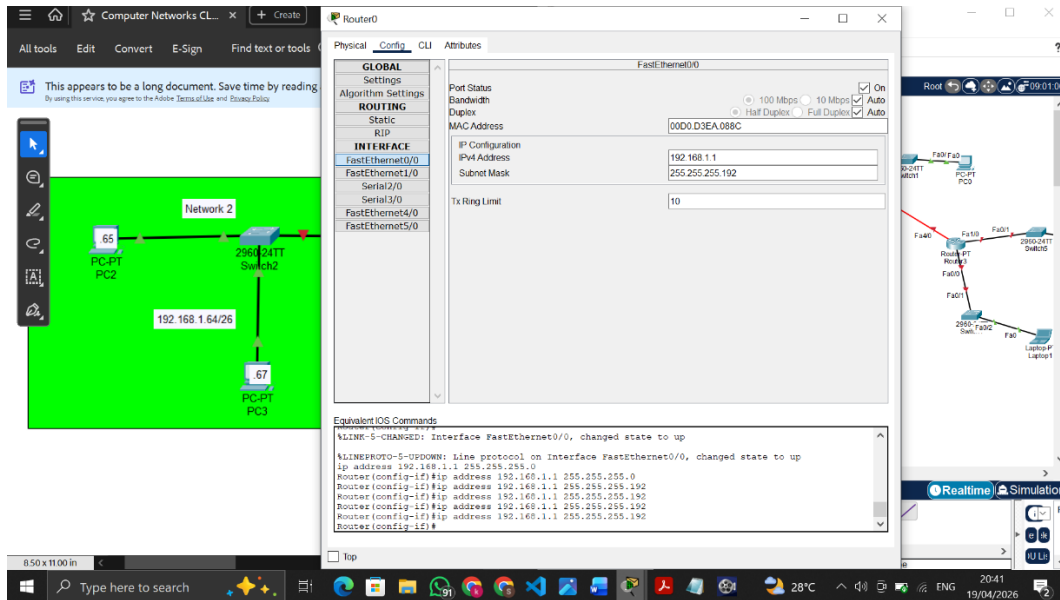

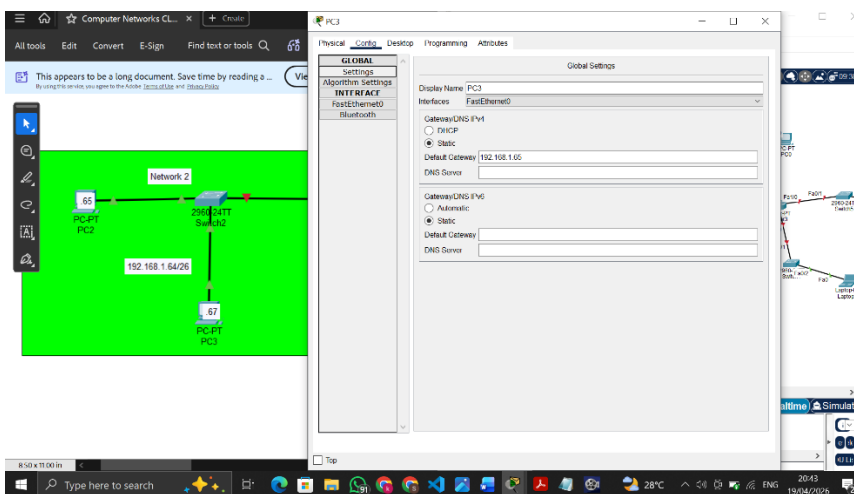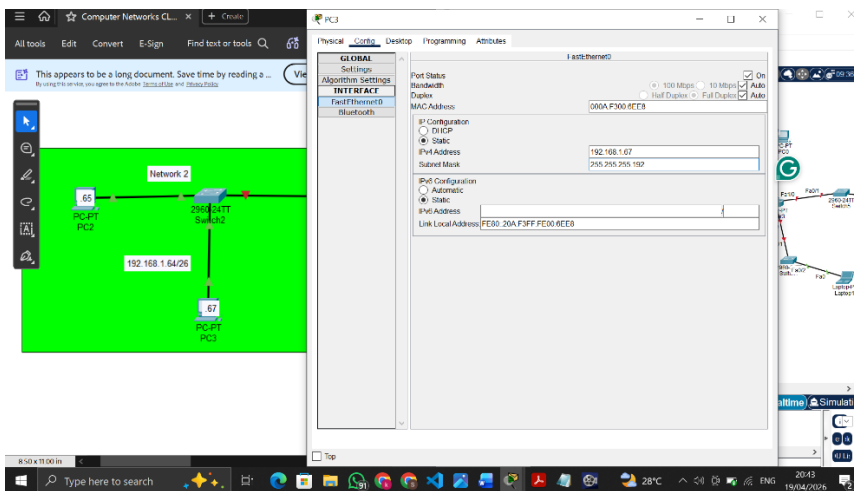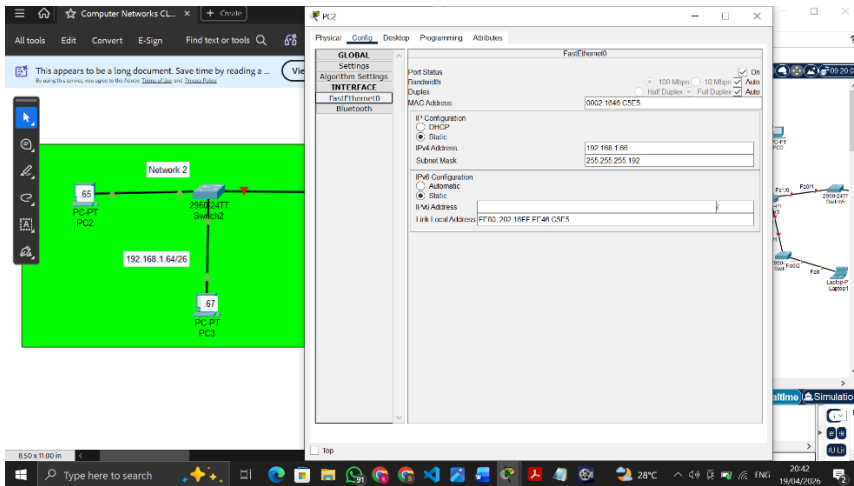

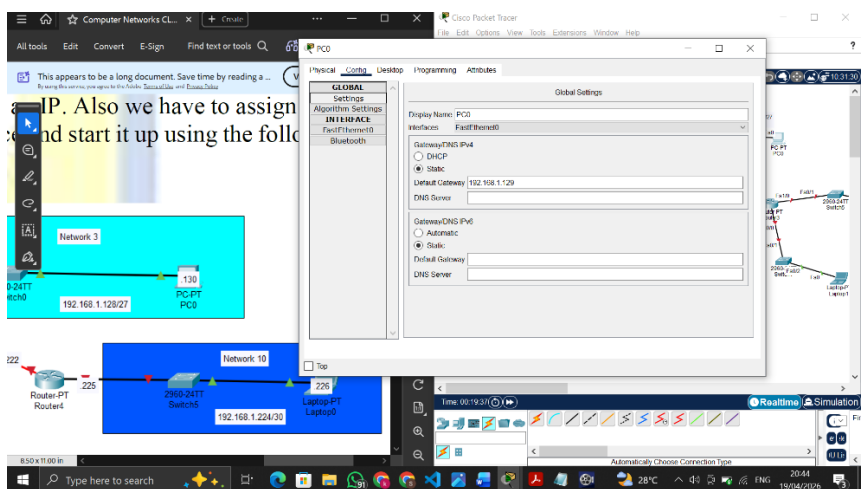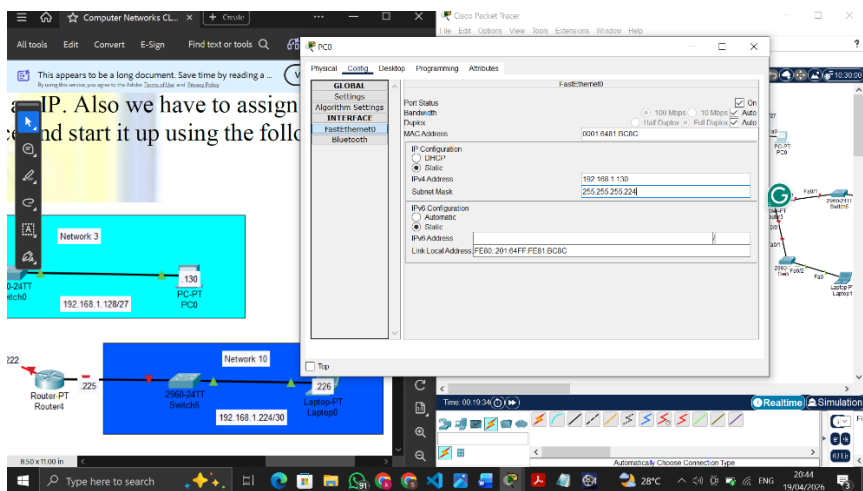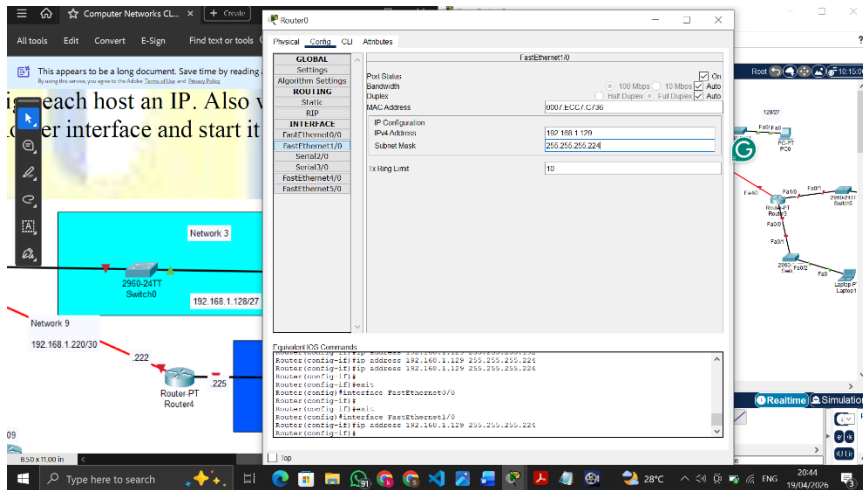

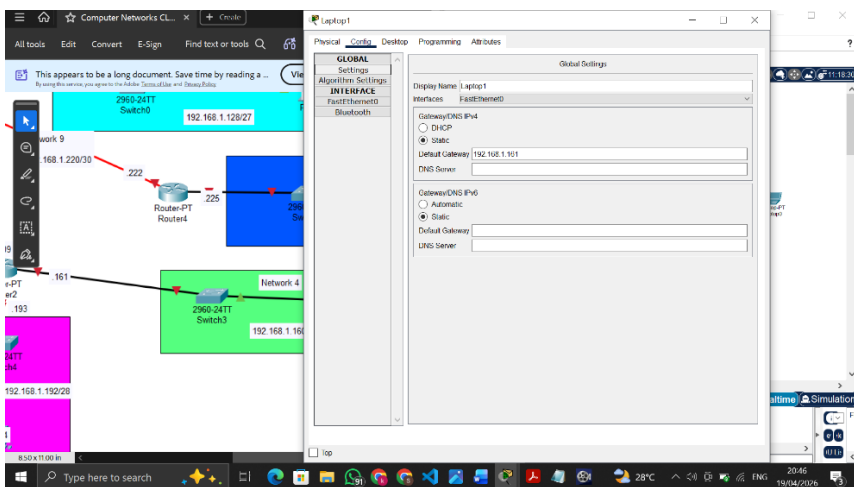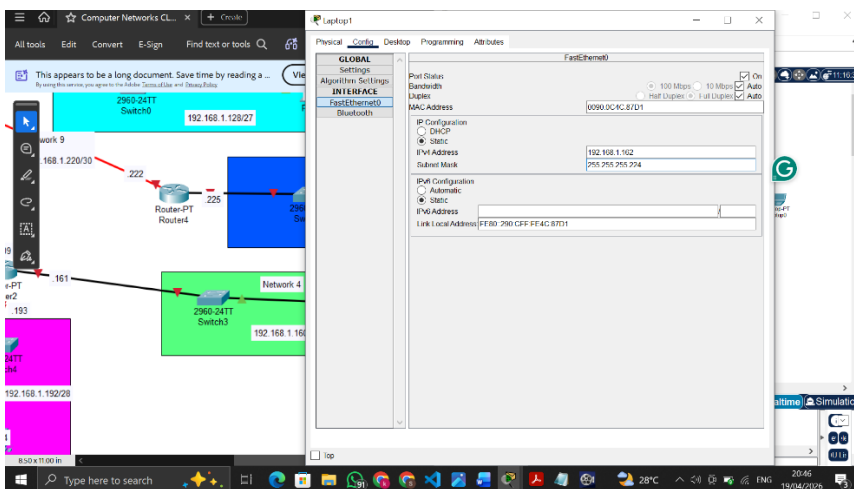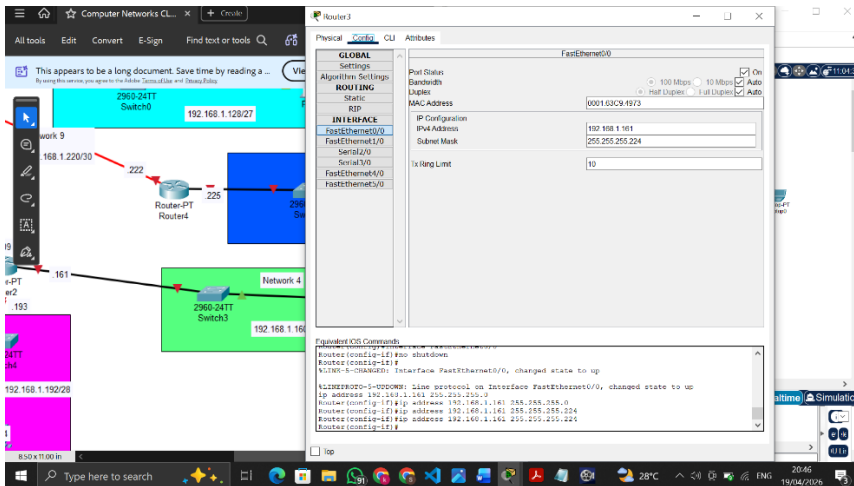




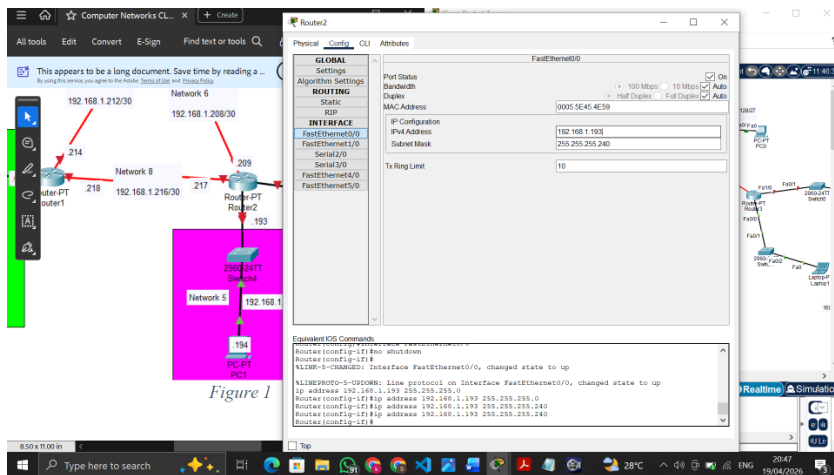


Figure 1

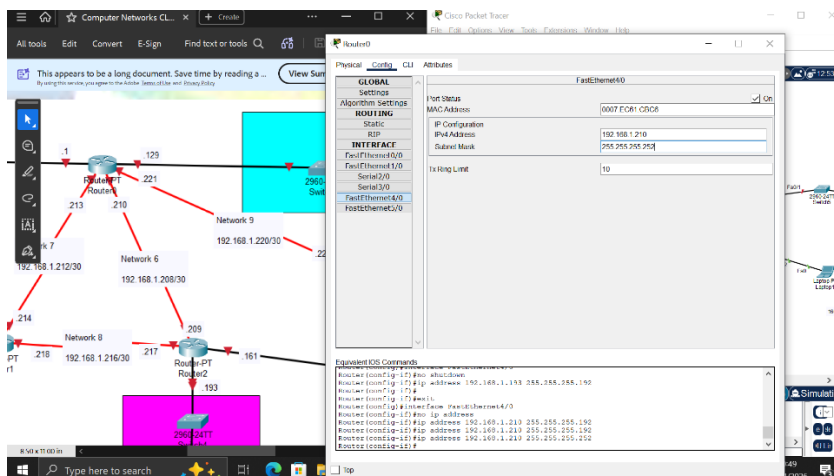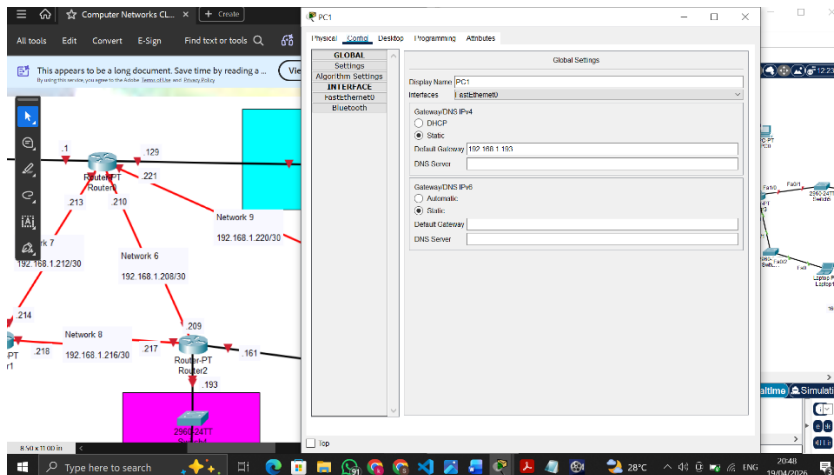

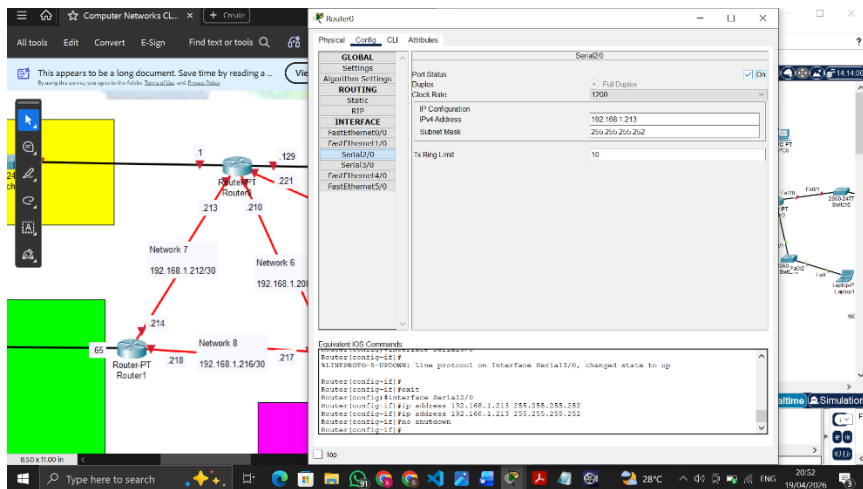

Computer Networks CL... x Create

All tools Edit Convert E-Sign Find text or tools

This appears to be a long document. Save time by reading a...

Router1

Physical Config Attributes

GLOBAL Settings Algorithm Settings

ROUTING Static

IP Configuration

IP Address 192.168.1.214

Subnet Mask 255.255.255.252

Tr Ring Limit 10

Equivalent IOS Commands

```
Router(config)# interface Serial2/0
Router(config-if)# no shutdown
Router(config-if)#
%LINEPROTO-5-UPDOWN: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
ip address 192.168.1.214 255.255.255.252
Router(config-if)#
Router(config-if)#
Router(config-if)#
```

Tip

14:24:30

Simulation

Computer Networks CL... x Create

All tools Edit Convert E-Sign Find text or tools

This appears to be a long document. Save time by reading a...

Router1

Physical Config Attributes

GLOBAL Settings Algorithm Settings

ROUTING Static

IP Configuration

IP Address 192.168.1.218

Subnet Mask 255.255.255.252

Tr Ring Limit 10

Equivalent IOS Commands

```
Router(config)# interface Serial2/0
Router(config-if)# no shutdown
Router(config-if)#
%LINEPROTO-5-UPDOWN: Interface Serial2/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
ip address 192.168.1.218 255.255.255.252
Router(config-if)#
Router(config-if)#
Router(config-if)#
```

Tip

14:57:00

Simulation

Computer Networks CL... x Create

All tools Edit Convert E-Sign Find text or tools

This appears to be a long document. Save time by reading a...

Router2

Physical Config Attributes

GLOBAL Settings Algorithm Settings

ROUTING Static

IP Configuration

IP Address 192.168.1.217

Subnet Mask 255.255.255.252

Tr Ring Limit 10

Equivalent IOS Commands

```
Router(config)# interface Serial3/0
Router(config-if)# no shutdown
Router(config-if)#
%LINEPROTO-5-UPDOWN: Interface Serial3/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up
ip address 192.168.1.217 255.255.255.252
Router(config-if)#
Router(config-if)#
Router(config-if)#
```

Tip

15:00:30

Simulation

Router0 Configuration:

- GLOBAL Settings:**
 - Algorithm Settings: Static
 - ROUTING: RIPv2
- INTERFACE Settings:**
 - FastEthernet0/0:
 - IP Configuration: Static
 - IP Address: 192.168.1.221
 - Subnet Mask: 255.255.255.252
 - Trunking: 10

Equivalent IOS Commands:

```

Router(config)# interface FastEthernet0/0
Router(config-if)# ip address 192.168.1.221 255.255.255.252
Router(config-if)# no shutdown
  
```

PC1 Configuration:

- GLOBAL Settings:**
 - Algorithm Settings: Static
 - ROUTING: RIPv2
- INTERFACE Settings:**
 - FastEthernet0:
 - IP Configuration: Static
 - IP Address: 192.168.1.104
 - Subnet Mask: 255.255.255.240

Equivalent IOS Commands:

```

Router(config)# interface FastEthernet0
Router(config-if)# ip address 192.168.1.104 255.255.255.240
Router(config-if)# no shutdown
  
```




Router3 Configuration:


- GLOBAL Settings:**
 - Algorithm Settings: Static
 - ROUTING: RIPv2
- INTERFACE Settings:**
 - FastEthernet0:
 - IP Configuration: Static
 - IP Address: 192.168.1.225
 - Subnet Mask: 255.255.255.252
 - Trunking: 10

Equivalent IOS Commands:

```

Router(config)# interface FastEthernet0
Router(config-if)# ip address 192.168.1.225 255.255.255.252
Router(config-if)# no shutdown
  
```

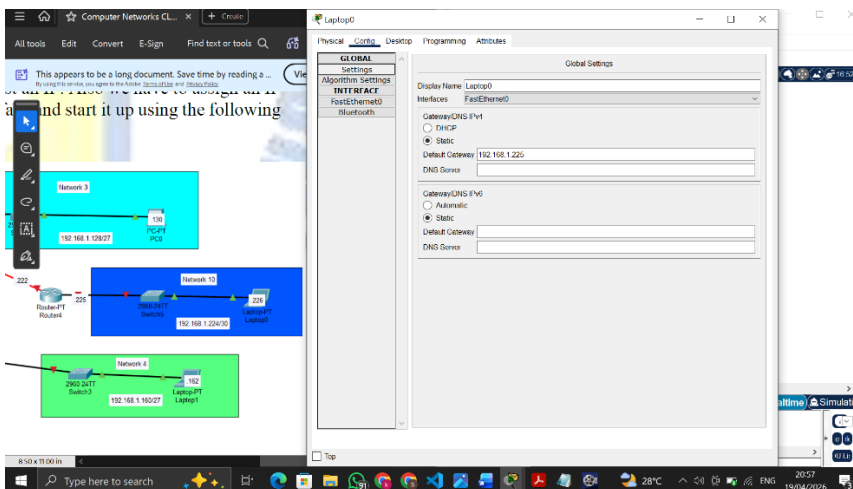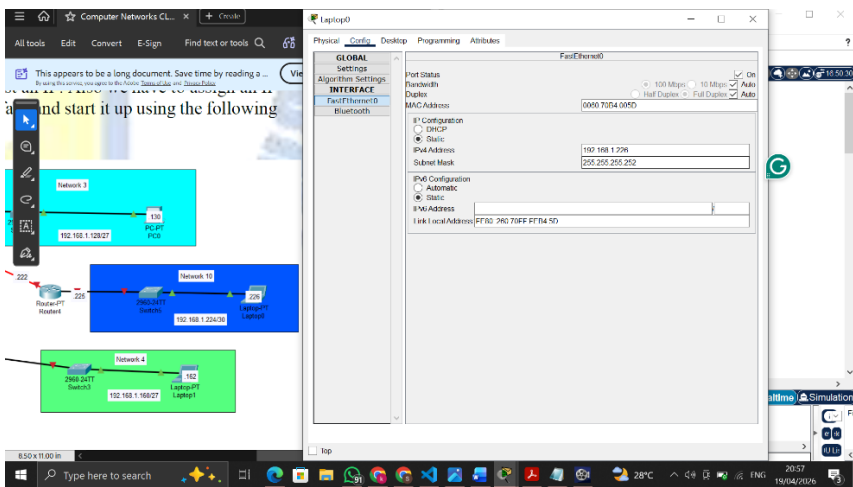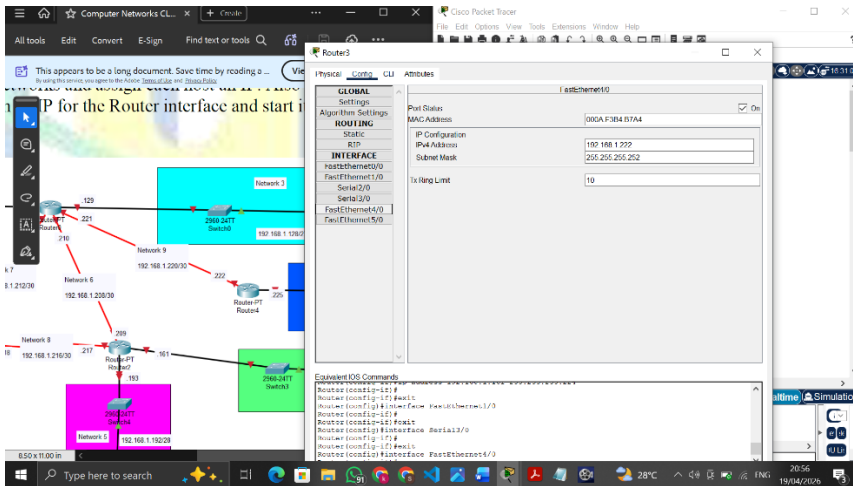

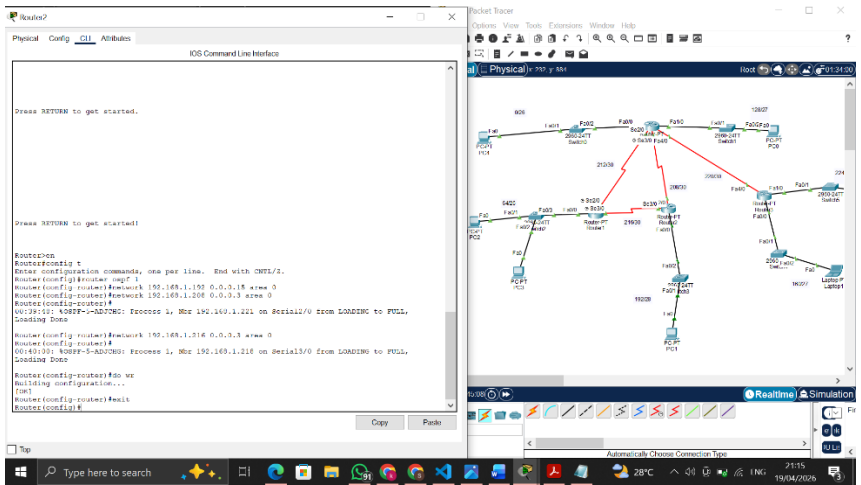

2. Implement subnetting on the given scenario. You must implement the BGP on the same. What will be the administrative distance of the routing? Use Network Address as follows: 192.168.4.0/24. Also, show your working in written form for Question #02.

