


Literature Comparison for Copper-Filled Material Extrusion

Reported Two-Step Debinding and Sintering Profiles

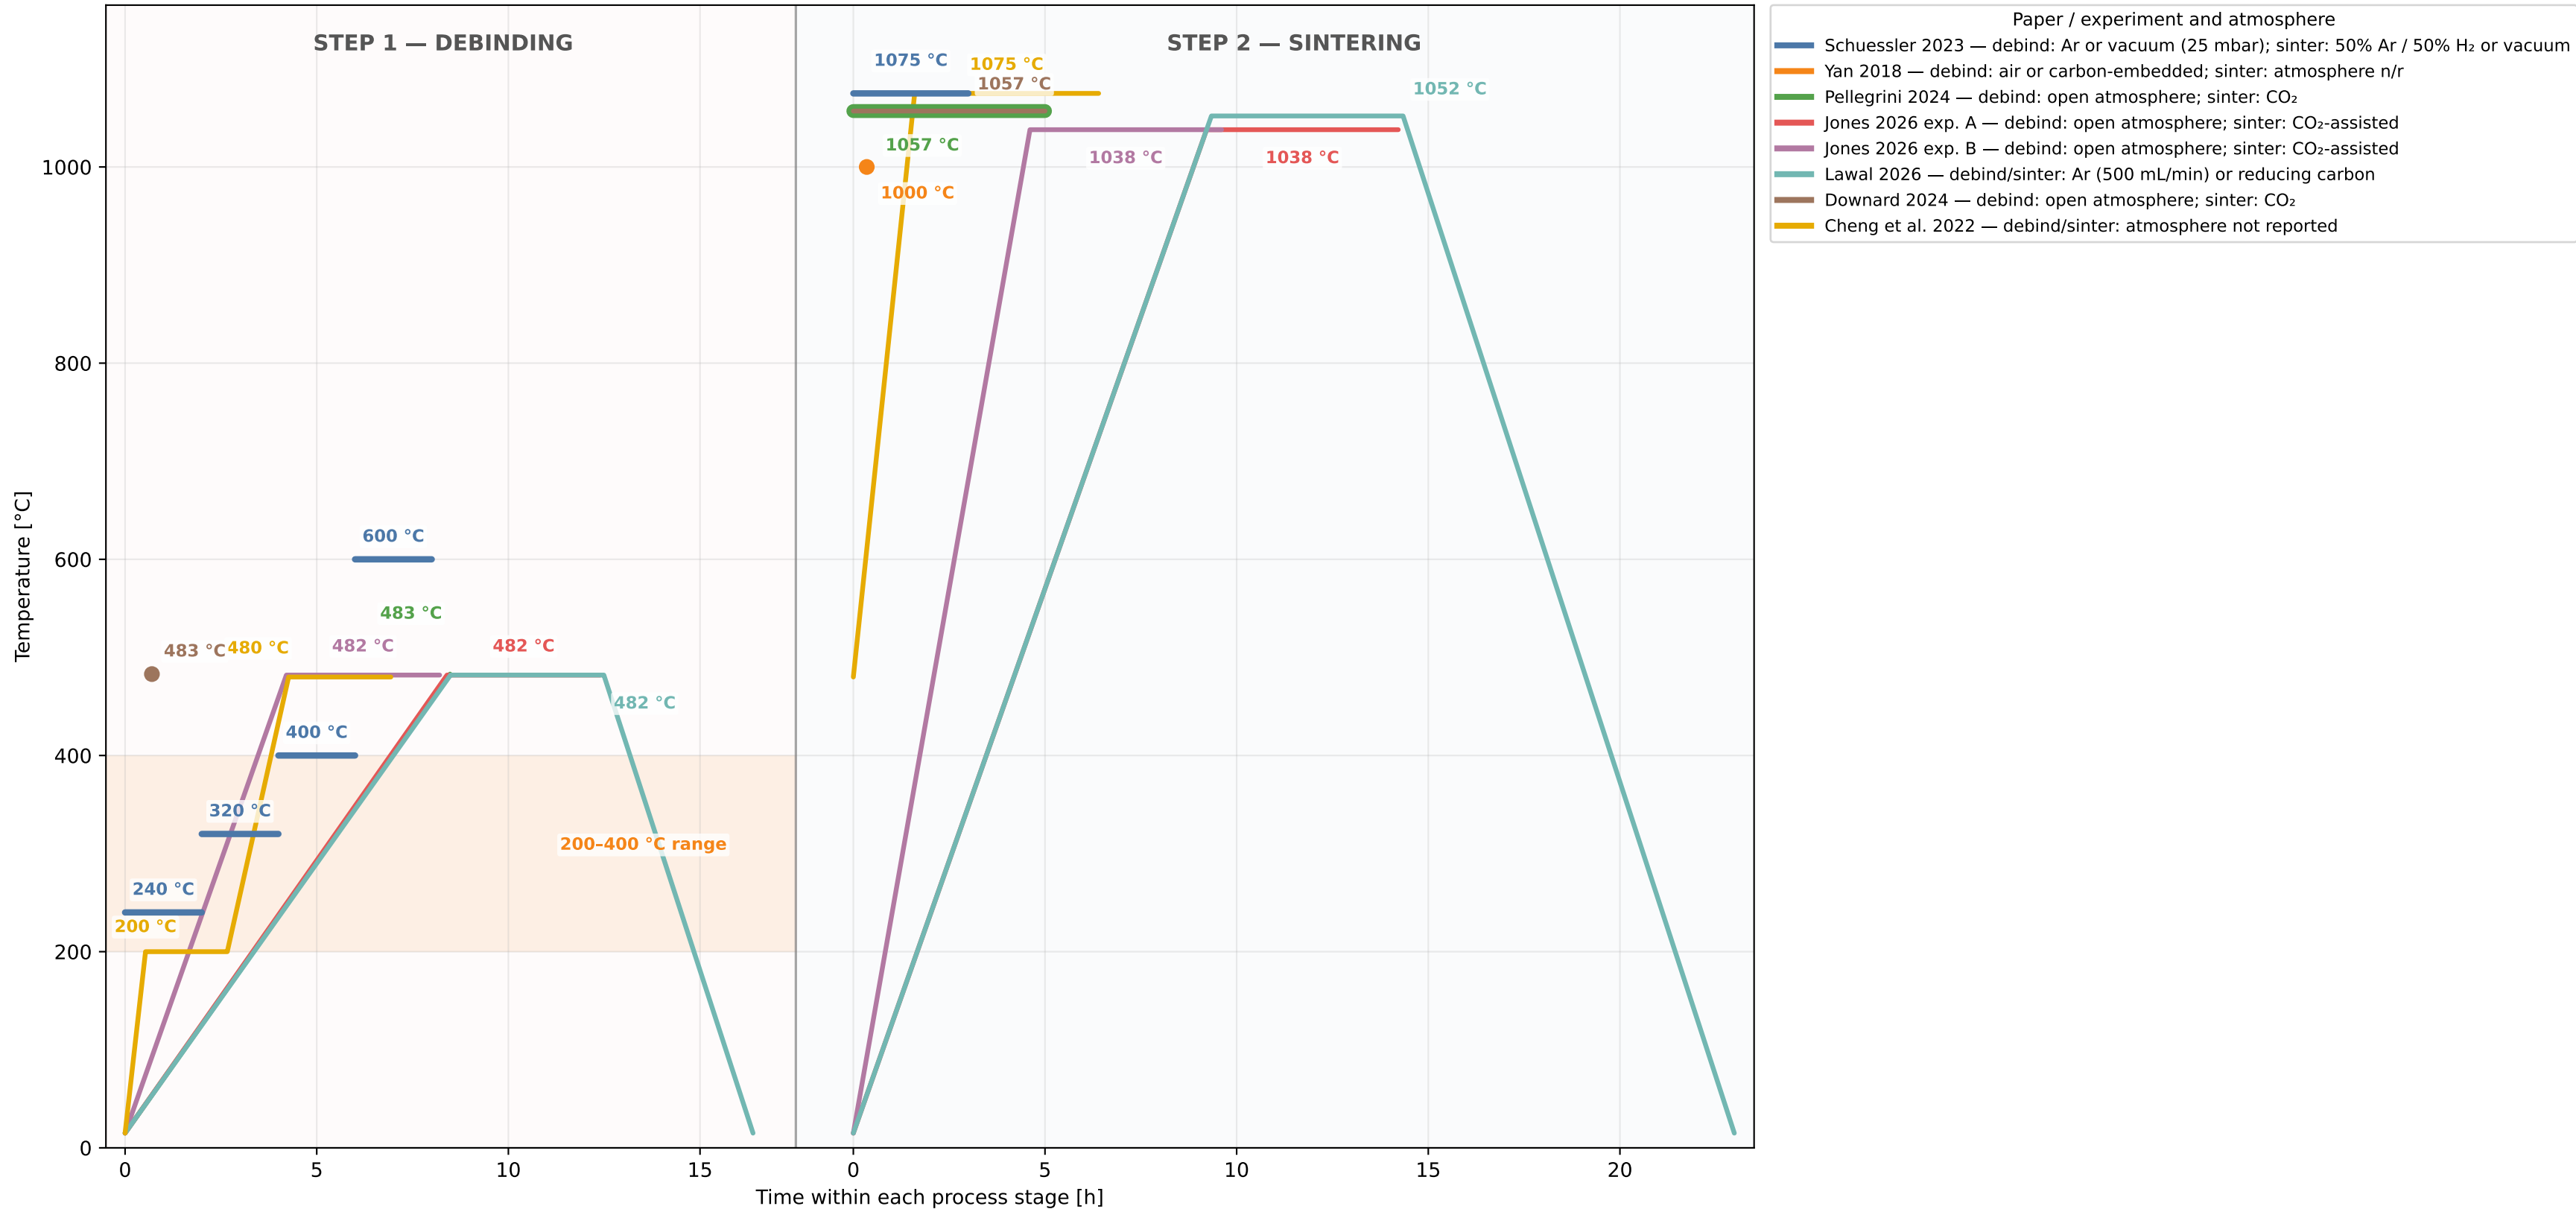

The x-axis resets for step 2; the gap is for visual separation, not elapsed process time. Missing ramps are omitted: horizontal lines show holds, dots show maximum-only data, and Yan's pale area shows its debinding range. Timed curves use a 15 °C start. n/r = not reported.