

1. SPECIFICATION

1.1 Drawing No. : 26305537

1.2 Mechanical

1.2.1 Dimensions : Refer to Page 3

1.2.2 Material

1.2.2.1 Header : SPCC filled with glass on the eyelet (SamMyung)

Tensile Strength	340 Mpa
Elongation (%)	27 – 31
Conductivity Thermal (W/m°C)	54.7 W/m-K @ Temperature 200 °C
	60.2 W/m-K @ Temperature 100 °C
	65.2 W/m-K @ Temperature 0 °C
CTE (µm/m-°C)	12.6 – 13.1 µm/m-°C @ Temperature 0 - 400 °C

1.2.2.2 Leads : NiCo 2918 (KOVAR)

Tensile Strength / Hardness (Mpa)	517 Mpa / 68 RB
Elongation (%)	30
Conductivity Thermal (W/m°C)	17
CTE (µm/m-°C)	4.90 µm/m-°C @ Temperature 30 - 400 °C

1.2.2.3 Electroless : Sn 99.3%, Cu 0.7% (Pb free)

Plating : Plating thickness 2 - 4 µm

1.3 Electrical

Not Applicable

1.4 Visual Requirements

1.4.1 Surface Quality : Residues are not allowed, plating must be evenly distributed; no voids, stain or rust permissible.

1.4.2 Size of voids on welding areas : < 20 µm

1.4.3 Punching part : Free of edges

1.5 Test Requirements

1.5.1 Glass-to-Metal Seal : Black transmission from 0.2 µm to 20 µm wavelength ≤ 0.1%

1.5.2 Transmission of glass melting : Output voltage should be < 40 mV using Excelitas test set-up. Calibrate with Excelitas calibration headers. See Figure 1.

1.5.3 Insulation resistance : > 10¹⁰ Ω (Lead-ground, supply voltage 100 V DC)

					NAME	DATE	DEPARTMENT	
				DRAWN BY	CHUA SH	25.09.2014	ENGINEERING	
				CHECKED BY	JONI	25.09.2014	ENGINEERING	
				DESCRIPTION				PART/ BAU NO
				BASEPLATE TO39 (3+1P) H2.00 L13.20 (SY)				26305537
0	ECN 19733	14.11.16	JONI					
REV	ECN NO.	DATE	NAME	SUBSTITUTE FOR :		DATED :		PAGE 1 OF 3

- 1.5.4 Leakage rate for Helium at : 10^{-8} bar $\text{cm}^3 \text{s}^{-1}$ max.
1 bar pressure difference (After thermal shock at 20°C - 500°C within 1 min.)
- 1.5.5 Gross Leak Test : No visible bubble is allowed from both sides of the header
- 1.5.6 Bubble Test : Per MIL-STD 883J and MIL-STD 38510

1.6 Incoming Quality

- 1.6.1 Inspection : Magnification 20X
- 1.6.2 Incoming Acceptance Level : 200 DPPM

2. REFERENCE

- 2.1 Supplier Mfg P/No. : TBD
- 2.2 Jedec Standard No. 9

3. DOCUMENTS FROM VENDOR


- 3.1 To provide transmission data of glass melting per delivery.
- 3.2 To enclose a copy of outgoing report and Certificate of Conformance for every shipment lot.

4. PACKING


- 4.1 Headers packed in dust-free sealed containers.
- 4.2 Maximum quantity : 5000 pcs/per container.
- 4.3 Shipment on pallet.
- 4.4 Each container must be identified with Bau. No., quantity, lot no. and manufacturing date.

5. STORAGE / HANDLING

- 5.1 No handling by bare hands, only with finger cots.

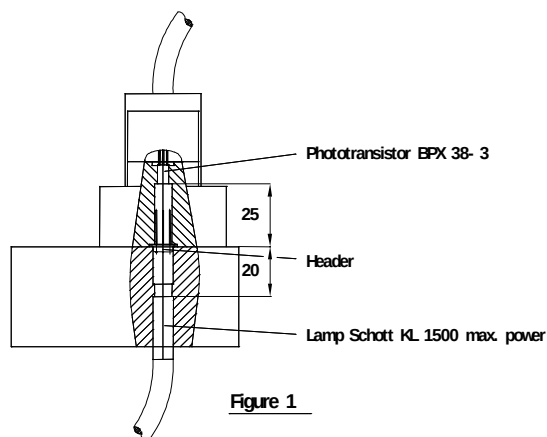

		NAME	DATE	DEPARTMENT	
	DRAWN BY	CHUA SH	25.09.2014	ENGINEERING	
	CHECKED BY	JONI	25.09.2014	ENGINEERING	
	DESCRIPTION				PART/ BAU NO
	BASEPLATE TO39 (3+1P) H2.00 L13.20 (SY)				26305537
	SUBSTITUTE FOR :		DATED :		PAGE 2 OF 3

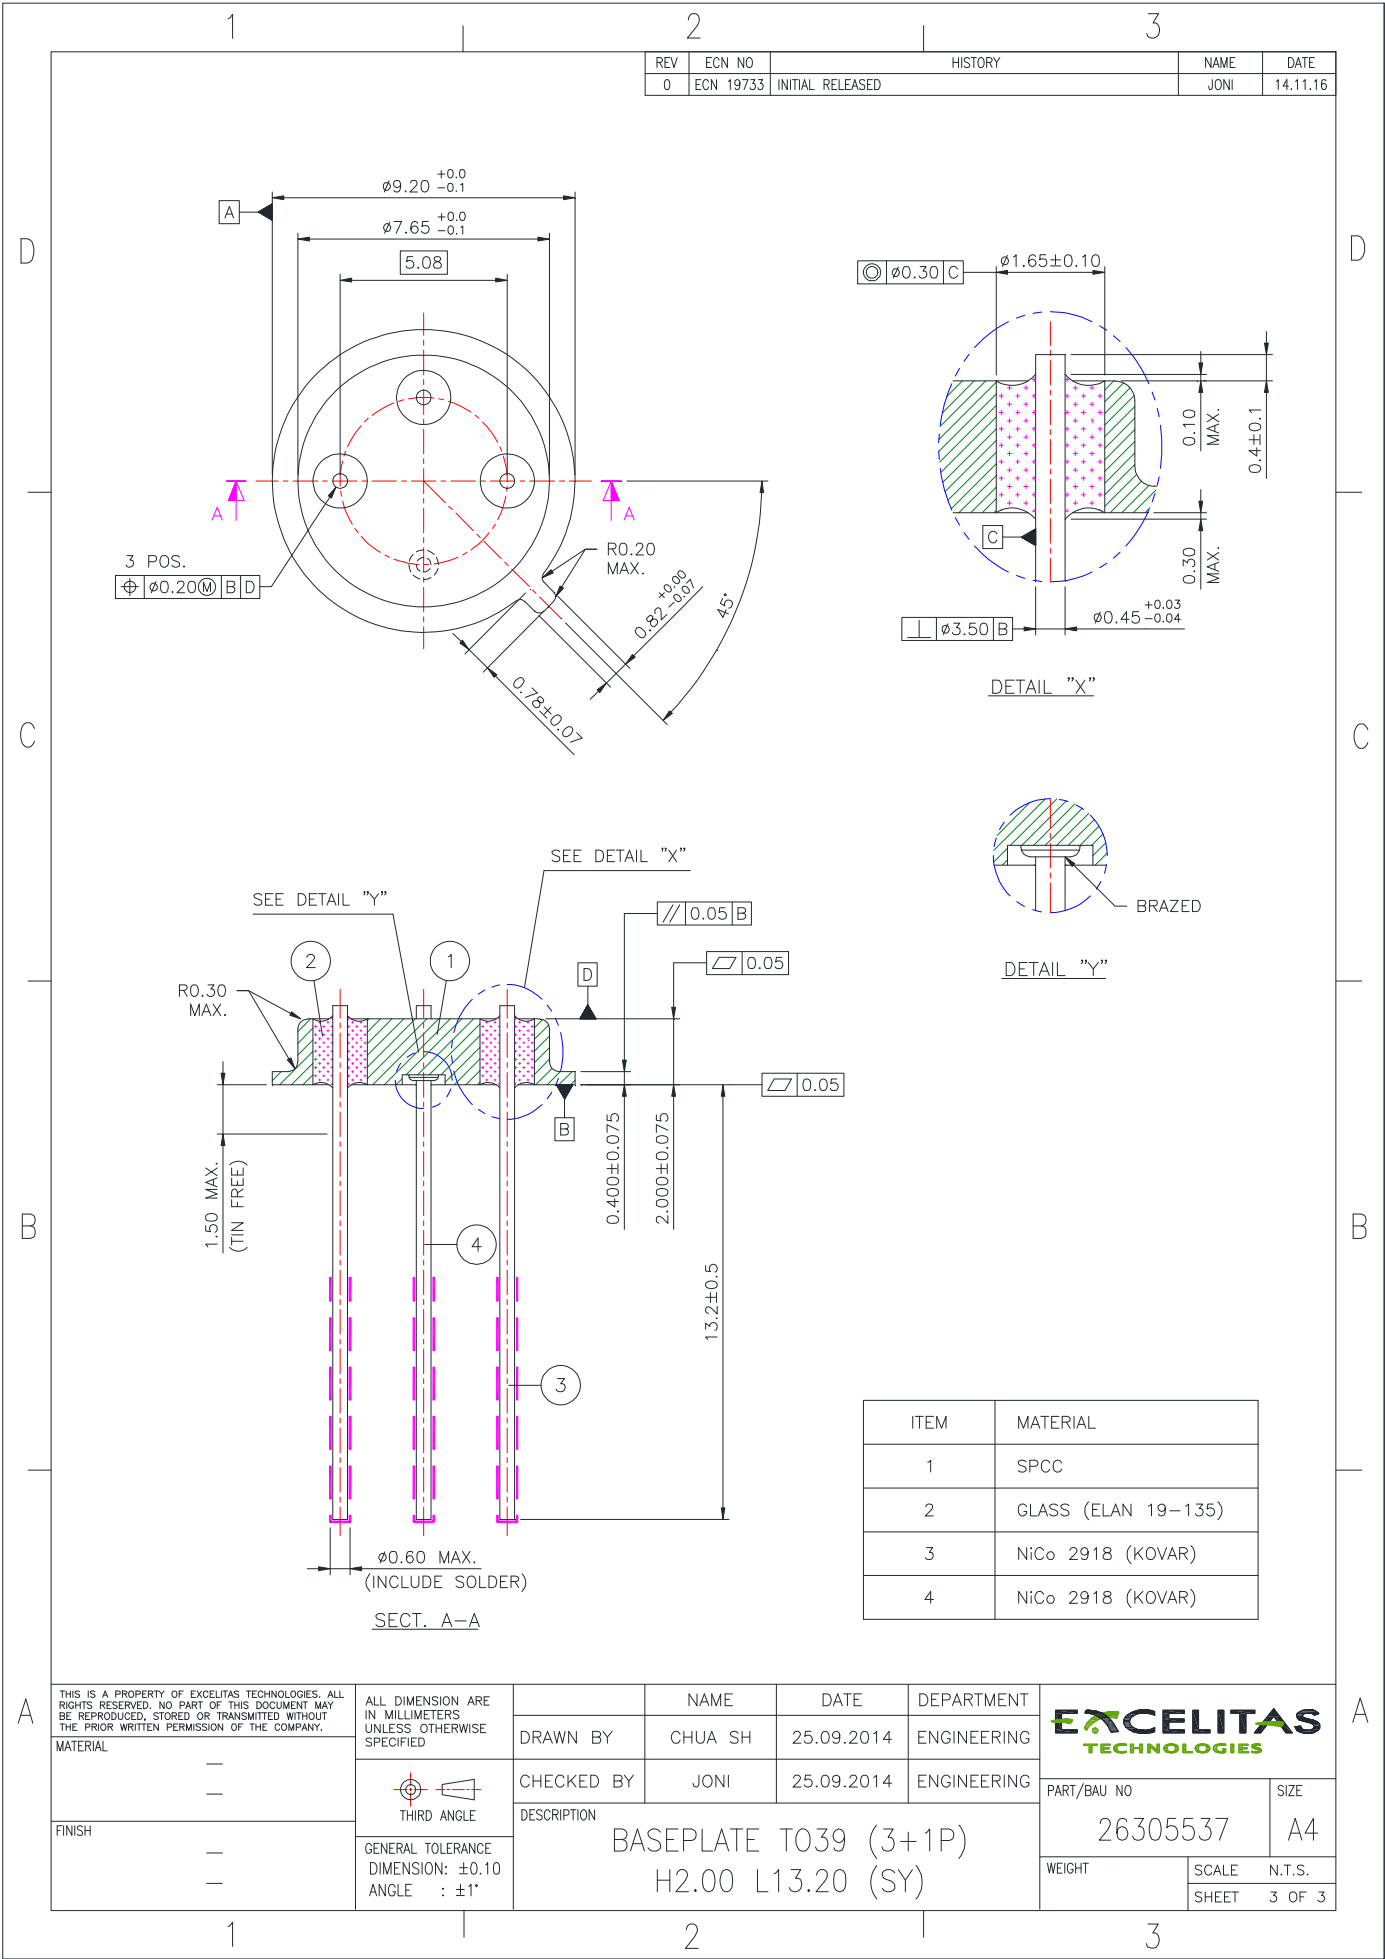

THIS IS A PROPERTY OF EXCELITAS TECHNOLOGIES. ALL RIGHTS RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED, STORED OR TRANSMITTED WITHOUT THE PRIOR WRITTEN PERMISSION OF THE COMPANY.

MATERIAL

FINISH

ALL DIMENSION ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED



THIRD ANGLE

GENERAL TOLERANCE DIMENSION: ± 0.10
ANGLE : $\pm 1^\circ$

NAME	DATE	DEPARTMENT
CHUA SH	25.09.2014	ENGINEERING
CHECKED BY	DATE	DEPARTMENT
JONI	25.09.2014	ENGINEERING
DESCRIPTION		
BASEPLATE T039 (3+1P) H2.00 L13.20 (SY)		

EXCELITAS TECHNOLOGIES

PART/BAU NO		SIZE
26305537		A4
WEIGHT	SCALE	N.T.S.
	SHEET	3 OF 3