



Mulcher for excavators

DA 56



DA 58




1 - 3,5 ton



Ø 6 cm



DA 56 - 110 kg
DA 58 - 130 kg




Lt./min.

	ton.	Kg.	n.	n.	Lt./min.
DA 56	1 - 3	110	16	16	19 - 26 - 33
DA 58	1,9 - 3,5	130	18	18	26 - 33 - 44




Mulcher for excavators

Rotation
3000 rpm
BIDIRECTIONAL



1 - 3,5 ton Ø 6 cm

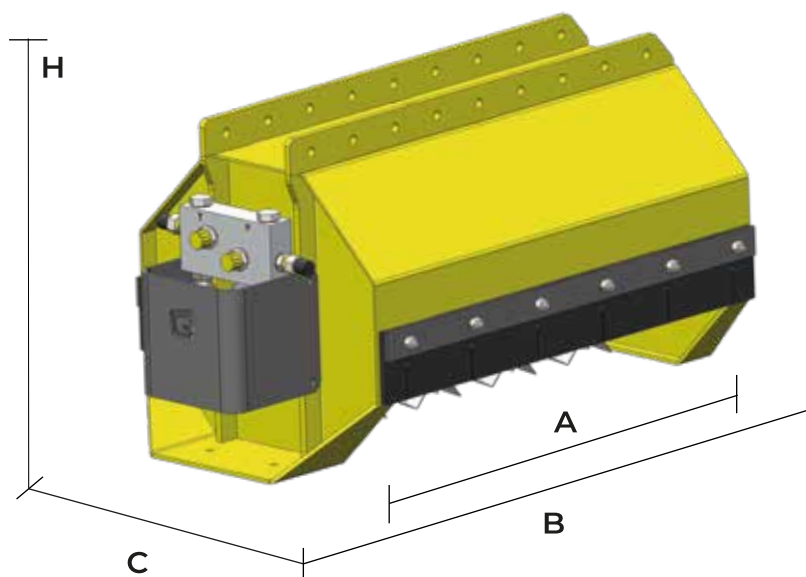

"K" rotor with knives



QA 05

Composed of:
1x knife I cod. 90026
2x knife / cod. 90014
1x u-bolt cod. 90002
1x screw/nut cod.
90004 + 90003



"H" rotor with hammers




QA 14


Composed of:
1x hammer 90093
1x u-bolt 90002
1x screw/nut cod.
90004 + 90003

MEASURES


	A (mm.)	B (mm.)	H (mm.)	C (mm.)
DA 56	640	820	440	400
DA 58	800	990	440	400



VD 51
Coupling with
removable pins



VD 52
Coupling with
welded pins



VD 50
Bolted flat
plate



VD 54
Quick coupling
adapter