

Auger drive units for excavators, backhoe loaders and skidloaders
1,8 to 6 tons



Horizontal connection

Features

No external drainage required



1 pin arm bracket included



MODEL	TB 06 E08	TB 06 E10	TB 06 E20
Speed [rounds/lt.]	2,1	1,2	0,8
Max oil flow [ltrs/min.]	80	80	80
Max pressure [bar]	200	200	200
Output power [Kw]	10	12	15
Weight [Kg.]	38	40	40
Torque [kNm]	1,1	1,3	2,6
Exc. operative weight (roughly) [ton.]	1,8 - 2,5	2,5 - 4	4 - 6



Sideways connection




Skidloader connection



Log splitter

Auger drive units for excavators, backhoe loaders and skidloaders
1,8 to 6 tons

**TB 06 E08 with
vertical standard
bracket**

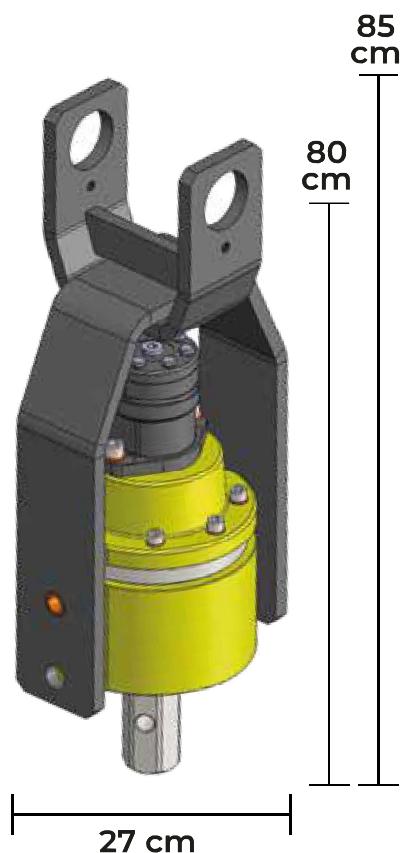


Up to 6 tons



Hexagonal
shaft
50MM


TB 06 drill bits



mod. SL
soft soils
(agricultural)



mod. SD
mixed soils



mod. SY
Rocky soils



mod. SJ 52
stump grinder bits



mod. SHR 30
ground tiller




mod. SJ 50
log splitter bit


Other excavator arm bracket



Quick hitch
adapter
(not included)



Sideways connection
bracket for BT augers

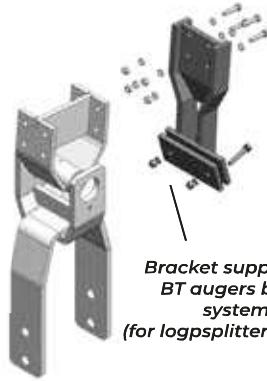

Bracket support for
BT augers block
system
(for logsplitter bit only)



Horizontal
connection
for TB augers