

AUGER DRIVE UNIT FOR MINI EXCAVATORS

0,8 to 2,5 Tons

- Direct drive ✓
- No external drainage required ✓
- 1 pin excavator arm bracket included ✓



Features

MODEL	TA 01 E31	TA 01 E40	TA 01 E56
Speed [rounds/lt.]	3,2	2,5	2,1
Max Oil flow [ltrs/min]	75	75	75
Max pressure [bar]	230	230	230
Output power [Kw]	15	12,5	9,6
Exc. Operative weight [ton.]	0,8	1,5	2,5
Max torque [kNm]	1	0,99	0,99
Auger unit weight [Kg]	19	20	22



Short drill bit



Log splitter conic drill bit





Tiller



1 mt soil drill bit

AUGER DRIVE UNIT FOR MINI EXCAVATORS 0,8 to 2,5 Tons

TA 01 + VT 68
Vertical standard
bracket

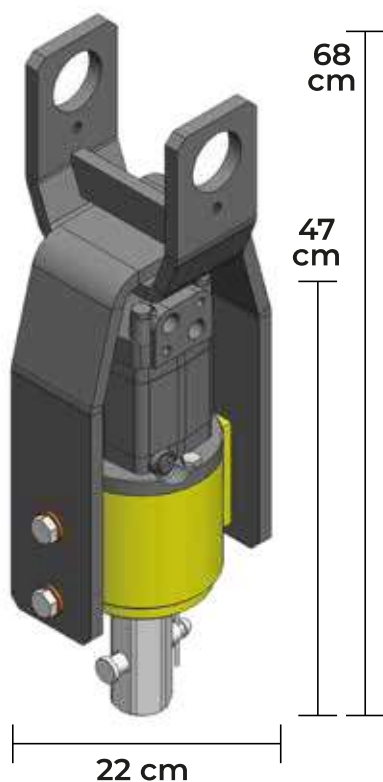


0,8 to 2,5 Tons



hexagonal
shaft 50mm


TA 01 Drill Bits



mod. SL
soft soils
(agricultural)



mod. SD
mixed soils



mod. SY
rocky soils



mod. SJ 52
Stump grinder bit



mod. SHR 30
Ground Tiller



mod. SJ 50
Log splitter bit


Other excavator arm brackets



VT 68 + VT 56
Quick hitch
adapter
(not included)



VT 65
Lateral arm
connection bracket

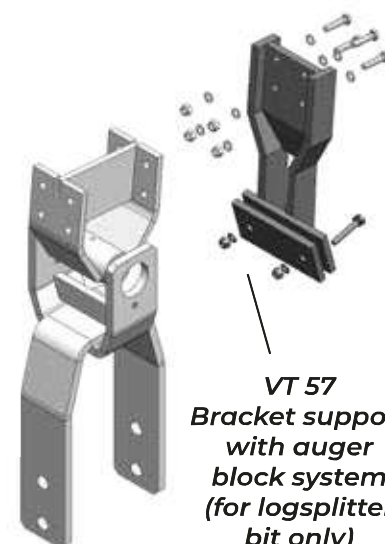

VT 57
Bracket support
with auger
block system
(for logsplitter
bit only)