



## Specifications

|                            |                                                                                                                                                                              |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                      | LK-360                                                                                                                                                                       |
| Mode of printing           | Thermal transfer printing                                                                                                                                                    |
| Resolution                 | 300dpi                                                                                                                                                                       |
| Printing character height  | 1.3mm—8mm                                                                                                                                                                    |
| Max number of input pages  | 100                                                                                                                                                                          |
| Tube printable             | Φ2.0—Φ8.0(PVC tube & Clear tube)                                                                                                                                             |
| Label tape printable       | 6mm、9mm、12mm                                                                                                                                                                 |
| Flat shrink tube printable | Φ3.0—Φ8.9(width 14mm max.)                                                                                                                                                   |
| Plate printable            | Φ4.0mm—Φ11.0mm(without half-cutting)                                                                                                                                         |
| Printing speed             | High speed 50mm/s<br>Middle speed 35mm/s<br>Low speed 27mm/s                                                                                                                 |
| Output rate                | High speed:about 43pcs/min<br>Middle speed:about 40pcs/min<br>Low speed:about 37pcs/min<br>(printing 20mm tubes,5 full-size characters, consecutive print mode,half-cutting) |
| Display                    | LCD, white color background                                                                                                                                                  |
| Characters printable       | English, number, symbol                                                                                                                                                      |
| Entry method               | Standard 83-key                                                                                                                                                              |
| Memory                     | About 100,000 characters                                                                                                                                                     |
| Material cutting method    | Automatic half-cutting & full-cutting                                                                                                                                        |
| Power supply               | DC 12V 2A                                                                                                                                                                    |
| Ambient requirements       | Operation: Temp 15℃~35℃<br>Relative humidity 10%~85% (without condensation)<br>Storage: Temp 5℃~35℃<br>Relative humidity 10%~85% (without condensation)                      |
| PC Port                    | USB                                                                                                                                                                          |
| Overall dimensions         | 330(L)X290(W)X105(H))                                                                                                                                                        |
| Weight                     | About 2.5kg                                                                                                                                                                  |



## Comsumables

| Commodity                           | Model    | Package        |
|-------------------------------------|----------|----------------|
| Ribbon Cassette Black               | LM-36B   | 12mm×100M      |
| Ribbon Cassette White               | LM-36W   | 12mm×100M      |
| Ribbon Cassette Red                 | LM-36R   | 12mm×100M      |
| Ribbon Cassette Blue                | LM-36L   | 12mm×100M      |
| Label cassette tape 6mm White       | LM-606W  | 6mm×8M         |
| Label cassette tape 6mm Yellow      | LM-606Y  | 6mm×8M         |
| Label cassette tape 6mm Silver      | LM-606S  | 6mm×8M         |
| Label cassette tape 9mm White       | LM-609W  | 9mm×8M         |
| Label cassette tape 9mm Yellow      | LM-609Y  | 9mm×8M         |
| Label cassette tape 9mm Silver      | LM-609S  | 9mm×8M         |
| Label cassette tape 12mm White      | LM-612W  | 12mm×8M        |
| Label cassette tape 12mm Yellow     | LM-612Y  | 12mm×8M        |
| Label cassette tape 12mm Silver     | LM-612S  | 12mm×8M        |
| Flat shrink tube white (ratio 2:1)  | LM-RS30W | 3.0mm×30M/Roll |
| Flat shrink tube white (ratio 2:1)  | LM-RS52W | 5.2mm×30M/Roll |
| Flat shrink tube white (ratio 2:1)  | LM-RS68W | 6.8mm×30M/Roll |
| Flat shrink tube yellow (ratio 2:1) | LM-RS30Y | 3.0mm×30M/Roll |
| Flat shrink tube yellow (ratio 2:1) | LM-RS52Y | 5.2mm×30M/Roll |
| Flat shrink tube yellow (ratio 2:1) | LM-RS68Y | 6.8mm×30M/Roll |

# LK-360

Cable ID Printer

*Characterized development*  
*Specialized technology*



**LABEL & MARK INDUSTRIES COMPANY**

Specifications are subject to change without prior notice for product improvement.



# LK-360

Cable ID Printer



**L-MARK®**  
Make your work easier


*Characterized development  
Specialized technology*

On the basis of decade technical experiences ,L-Mark developed stable and powerful LK360 Cable ID Printer,which using patent techniques to design and upgrade over dozens of details .Super speed, Unique ribbon tension control system, Electromagnetic switch, Auto back off function. Larger and more friendly display interface, Practical and convenient U-disk and PC connection port etc. All characters of LK360 make it to be a worldwide masterpiece.



## Faster,Easier and Clearer

- Super high speed (50mm/s max) save time
- Special tube feed slot,easy and convenient installation
- Auto back off function to save materials
- Updated exit design,material out smooth
- PC and U-Disk port combined,updating by U-Disk available
- PVC tube,transparent tube,heat shrink tube,label tape and plate can be printed

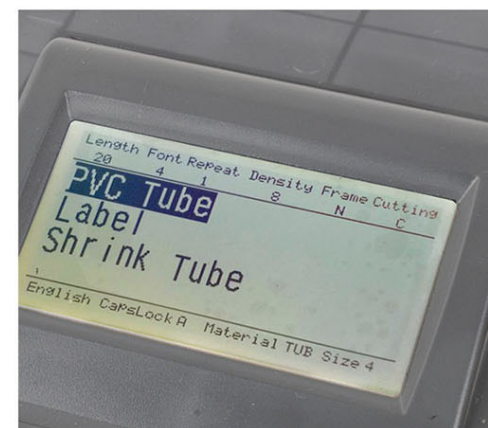

Larger and more friendly LCD screen, displaying 11 kinds of function parameters



Special tube feed in slot. Size from  $\Phi 2.5\text{mm}$  to  $\Phi 8.0\text{mm}$  available



Flat shrink tube can be printed Special feed in slot, Max width 14mm available



Auto back off function, Saving material by using patent technique



Simple metal nameplate makes the printer looks exquisite and classy



PC and U-disk combined port Easy updating the program by U-disk



Special exit design, materials print out smoothly and quickly



Standard 83-key keyboard, English,number,symbol can be printed



High quality Printer Head, Assure the accurate and clear printing effects

**LABEL & MARK INDUSTRIES COMPANY**

Tel:86-10-51661676 Fax:86-10-82612532

Add.:No.51, ShuangYu Road,Beijing,China, 100041 [Http://www.lmark.net](http://www.lmark.net)