

Confectionery Showcase



Elanpro Display Cases are known for their elegant designs and reliable cooling systems. They are adored and admired by leading Bakery Professionals for enhancing the display of the *fine crafted pastry and cakes, and for maintaining the most appropriate temperature which maintains the taste, aroma and quality of their produce.* Elanpro Confectionery Display Cases are patronized by all leading cake and pastry retail outlets.

EHTC & EHTH 160 /
EHTC 100

Exquisite display with precise temperature



EDC 900 F3 / 1200 F3



EDC 900 C3 / 1200 C3 / 1500 C3
EDG 900 C3 - Grab & Go

Key Features - EDC Series:

- Double tempered with special heated glass enhances visibility and prevents moisture
- Available in stainless steel & marble finish
- Stainless steel interior
- LED lights on each shelf
- Ventilated refrigeration for uniform cooling
- Lockable Castors for easy mobility



EDC 501 L



LSC 408

Model	Description	Dimension (WxDxH) mm	Temperature Range	No. of Shelves
LSC 408	4 Side Pastry Showcase	711 x 711 x 1800	2°C ~ 8°C	Base + 4
EDC 501 L	Pastry Showcase	1200 x 738 x 1270	2°C ~ 8°C	Base + 3
EDC 900 C3/F3 A	Pastry Showcase	900 x 700 x 1270	2°C ~ 8°C	Base + 3
EDC 1200 C3/F3 A	Pastry Showcase	1200 x 700 x 1270	2°C ~ 8°C	Base + 3
EDC 1500 C3/F3 A	Pastry Showcase	1500 x 700 x 1270	2°C ~ 8°C	Base + 3
EDCC 900	Chocolate Showcase	900 x 700 x 1400	2°C ~ 8°C	Base
EDCC 1200	Chocolate Showcase	1200 x 700 x 1400	2°C ~ 8°C	Base
EHTC 100	Countertop Cold Showcase	670 x 452 x 670	2°C ~ 8°C	Base + 2
EHTC 160	Countertop Cold Showcase	873 x 570 x 670	2°C ~ 8°C	Base + 2
EHTH 160	Countertop Hot Showcase	873 x 570 x 670	30°C ~ 65°C	Base + 2

Due to continuous product development, specifications, features and colours are subject to change without notice.
EDC series is available in hot & ambient models with the same dimension.

32°C ambient temperature / 55% RH
Also available in ambient options.



ELANPRO®
The Commercial Refrigeration Experts

ICOLD®
Cold Room

thingify(y)
Cold Chain Monitoring

Call US : +91-98406 17999
Email : sales@divazconsulting.com
Website : www.divazconsultancy.com



FOR MORE DETAIL CONTACT

HEAD OFFICE

NO L13, 14, SIDCO 1ST MAIN RD, KODUNGAIYUR, CHENNAI,
TAMIL NADU 600118

BRANCH OFFICE

H.NO. 14-II-8, INFORMATION COLONY, THORRUR ROAD,
HAYATH NAGAR, HYDERABAD, TELANGANA 501505



ELANPRO®
The Commercial Refrigeration Experts

THE
HOTTEST PLACE
FOR ALL YOUR
COLD SOLUTIONS!



iCOLD™
Cold Room



Icold - The Perfect Cold Room

A cold storage is a critical piece of infrastructure for many industries. Icold, an Elanpro group company, has an extensive experience in creating cold storages that offers different storage conditions in terms of temperature, humidity, fresh air, air flow, etc., to precisely suit different industry requirements. This has made Icold the major brand in Cold Storage domain.

Icold solutions cover various Industries like:

Agriculture	Meat Processing	Hotels & Restaurants	Dairy	Ripening Chambers
R&D Labs	Floriculture	Sea Food	Pharmaceuticals	Food Processing
Ice Cream	Healthcare	Horticulture	Industrial Canteens	Mortuary

Technical Specifications

Panels

Icold's new range of pre-fabricated insulation panel systems are easy-to-use interlocking panels that can be used to create cold rooms of any size at the site. Manufactured in a wide range of profiles, thicknesses and finishes, these systems can be used to create cold stores at the site and of any size - from small walk-ins to very large cold rooms.

Doors

Icold offers a complete range of insulated doors to complement its world-class environment-friendly PUF panels.

The polyurethane foam insulation sandwiched between GI sheets makes the doors perfect for high-performance cold rooms.

- **Self-Closing:** Ensures door closes without any human interaction
- **Safety Release:** Doors can be opened from inside
- **View Port:** Helps view products stored inside without opening the door, which is convenience and saves power too
- **POSI Seal:** Provides perfect alignment of frames and ensures perfect closing movement
- **Sweep Gasket:** Air-tight heavy-duty sealing gasket below the door remains flexible at any temperature
- **Thermal Break:** Eliminates thermal conductivity which otherwise leads to condensation and ice formation



Eco Star Inverter Unit



Bitzer Air/Water Cooled Unit



Bitzer Rack Systems



Condensing Unit

Combined Strength in After Sales Support

Elanpro and Icold have been well known for their excellent service support in the entire industry. Now, the strength is multiplied!

Network grows larger; Reach and Resources multiply.

With a team of specially trained technicians placed at over 25 destinations across India, our esteemed customers would get quick & seamless service support. Elanpro and Icold dealer-partners based in different locations help our customers with perfect installations and together we will ensure excellent after sales support and availability of genuine parts at all times to avoid down time of your business.

Microprocessor Controller and Power Panel

Icold cooling solution come with intelligent microprocessor-powered controllers which are BMS compatible and HACCP proVi5io ed (available in select models).

Ready-to-use power panels which make electrical connections simple, safe, fast and long-lasting are available

with every refrigeration unit. Other features of power panels are:

- Powder-coated weather proof housing
- Protection against common electrical failures
- Interlock of safety features

Icold - Wide Range of Refrigeration Units

Icold offers a wide range of both evaporating and condensing units. It includes both Air-cooled and Water-cooled condensers, with technology from the world leaders. Depending on the application, different temperature zones need to be maintained: Low (-23°C to -5°C), Medium (-5°C to +2°C), High (+20°C to +15°C) and for blast application (-35°C to -40°C).

- Stainless steel body offers excellent corrosion resistance
- Inner grooved copper tubes for superior heat transfer
- In-built defrost heaters for low-temperature units
- External rotor driven fans with low noise levels
- Removable side panels for easy service

Accessories



Door Handle



Door Closer



Digital
Temperature
Display



Rotating Knob



Door Hinge



Control Panel



Display Coldroom

- 2 to 6 nos glass door
- Temperature range 2°C to 8°C
- 80 mm PUF panel
- Aluminium checkered flooring
- Adjustable shelving
- Double layer tempered glass door

Floor Finishes




Altro Flooring



Aluminum Chequered
(Available in 1.2/2/3 mm)



1.2 mm Dimple Plates
embedded in floor pan



Kota Stone Tiles: This type of
Flooring is used either on PUF
Slab or on GI Cladding Floor
Panels



Galvanized Sheet
(Available in 0.8/1.0/1.2/1.5
mm)

Optional Accessories



Internal Ramp
used where sunken flooring not available



Strip Curtain
as required



View Port
heated or normal



Pressor Relief Port



Cubik



Slim



Blast Freezer



Condensing Unit

Technical Specifications

TEMPERATURE @ 2°C to 6°C									
Refrigeration Model No.	Refrigeration Capacity KW	Refrigerant	Temp. Range °C	Loading Temp. °C	Max. Loading (Kgs/Day)	Ambient °C	Power Consumption (KW)	Power Supply (V/Ph/Hz)	Defrosting
CH-8	2.34 Kw	R-134a	2 to 6	30-35	250	40 to 43	1.6	220V/1Ph/50Hz	Air Off-Cycle
CH-12	3.51 Kw	R-407c	2 to 6	30-35	540	38 to 42	1.9	220V/1Ph/50Hz	Air Off-Cycle
CH-15	4.39 Kw	R-407c	2 to 6	30-35	770	38 to 42	2.4	220V/1Ph/50Hz	Air Off-Cycle
CH-19	5.85 Kw	R-407c	2 to 6	30-35	1000	38 to 42	3.4	400V/3Ph/50Hz	Air Off-Cycle
CH-21	6.14 Kw	R-407c	2 to 6	30-35	1200	38 to 42	3.4	400V/3Ph/50Hz	Air Off-Cycle
CH-42	12.29 Kw	R-407c	2 to 6	30-35	2500	38 to 42	5.3	400V/3Ph/50Hz	Air Off-Cycle
LOW TEMPERATURE @ -16°C to -20°C									
CL-4	1.17 Kw	R-404a	-16 to -20	-10 to -15	100	38 to 42	1.5	220V/1Ph/50Hz	Electric
CL-6	1.76 Kw	R-404a	-16 to -20	-10 to -15	200	38 to 42	2.0	400V/3Ph/50Hz	Electric
CL-8	2.34 Kw	R-404a	-16 to -20	-10 to -15	350	38 to 42	2.8	400V/3Ph/50Hz	Electric
CL-10	2.93 Kw	R-404a	-16 to -20	-10 to -15	500	38 to 42	3.4	400V/3Ph/50Hz	Electric
CL-14	4.1 Kw	R-404a	-16 to -20	-10 to -15	1000	38 to 42	4.3	400V/3Ph/50Hz	Electric

Basic of Design:

1. Loading considered 50 kgs/sq. mts for Chiller and 30 kgs/sq. mts for Freezer room.
2. Door Opening : 5 to 6 times/hr.
3. Environment Friendly Refrigerant.

Note:

Data is at standard rating and it may vary according to application/site/ambient conditions.

Specification/data is subjected to change without prior notice.

Low temperature unit are available in option of Hermetic/Semi-Hermetic as per customer requirement.



ELANPRO®
The Commercial Refrigeration Experts

**Price Less Quality
World Class Cooling
User Friendly Technology**



Retail Solutions - Premium Series

Elanpro Flat & Curved Glass Freezers are known for their performance, aesthetics and low power consumption. All curved glass models are available with LED light or Illuminated Canopy with a full basket. White Flat Glass comes with high insulation and standard baskets, they are designed to perform at high ambient.



EKG 215

EKG 626 DL

EKG 405/505

EKG 650

Key Features : Glass Top

- High performing cooling systems
- High insulations
- Low power consumptions
- Heavy duty castors

Key Features : Hard Top

- Low power consumption
- High insulation
- Castors for easy mobility
- Dual temperature – convertible Freezer & Chiller



EF 105

EF 305

EF 555

EF 825

Retail Solutions - Classic Series



PCF 110/200



EF 315/415/515



EF 335 DD



EKG 223/335/435/535



CLASSIC SERIES

DESCRIPTION	EF 135	EF 235	EF 335SD/335DD	EF 435 DD	EF 535 DD	EF 735	EF 315	EF 415	EF 515	EKG 235	EKG 335	EKG 435	EKG 535	PCF 110	PCF 200
Type															
Capacity (Litres)	100	218	322	428	534	700	166F + 130C	183F + 218C	272F + 237C	214	319	423	528	115	200
External Dimension (WxDxH) (Inch)	22 x 24 x 31	32 x 28 x 35	44 x 28 x 34	55 x 28 x 34	66 x 28 x 34	83 x 28 x 34	44 x 29 x 34	55 x 28 x 34	67 x 29 x 34	32 x 27 x 31	44 x 27 x 31	55 x 27 x 31	66 x 27 x 31	38 x 25 x 28	41 x 25 x 33
Baskets	1	1	1	2	2	3	2	2	2	2	2	2	2	NA	NA
No. of Door/Type	1	1	1 / 2	2	2	3	2	2	2	2/Glass	2/Glass	2/Glass	2/Glass	1/Solid	2/Solid
Temperature range - °C	8°C ~ -25°C						8°C ~ -25°C / -16°C ~ -24°C						-18°C ~ -28°C		
Castors	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	NA	NA
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	NA	NA

Note : Due to continuous product development, specifications, features and colours are subject to change without notice.

PREMIUM SERIES

DESCRIPTION	EF 105G	EF 205G	EF 305G	EF 315 DD (Dual Cabinet)	EF 455G	EF 555G	EF 825G	EKG 155 DC	EKG 215 DPG	EKG 310 DLG	EKG 410 DLG	EKG 415 DLG	EKG 626 DLG	EKG 205G	EKG 305G	EKG 405G	EKG 505AG	EKG 650G
Type																		
Capacity (Litres)	98	197	283	300	375	465	757	155	169	255	330	333	574	197	285	363	439	566
External Dimension (WxDxH) (Inch)	22 x 19 x 34	33 x 22 x 34	43 x 26 x 35	48 x 24 x 34	52 x 27 x 33	65 x 27 x 33	95 x 27 x 33	24 x 26 x 36	30 x 26 x 33	39 x 26 x 33	48 x 26 x 33	48 x 27 x 36	73 x 28 x 34	37 x 23 x 33	40 x 27 x 33	48 x 27 x 33	56 x 27 x 33	71 x 27 x 33
Baskets	1	1	2	1	2	2	3	2	2	4	5	5	9	2	2	2	2	9
No. of Door	1	1	1	2	2	2	3	2/Glass										
Temperature range - °C	8°C ~ -25°C						-16°C ~ -24°C											
Castors	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	

Note : Due to continuous product development, specifications, features and colours are subject to change without notice.

EKG 315 and EKG 415 have high density thickness of 82mm.

Upright Showcase Chiller & Freezer (Frost Free & Static)



Key Features:

- Eco-friendly refrigerant
- LED lighting for better visibility
- Adjustable shelves
- Low power consumption
- High insulation
- Removable gasket
- Triple pane heated glass in all freezers
- Tropicalised for harsh Indian weather conditions

DESCRIPTION	ECG 205	ECG 305	ECG 405	ECG 515	ECG 775	ECG 1075	ECG 1100	ECG 1500	EFGV 205	EFGV 375	EFGV 450	EFGV 500	EFGV 1075	EFGV 1000	EFGV 1500	
Type	Upright Chiller									Upright Freezer #						
Capacity (Litres)	200	300	400	515	700	1000	1100	1500	200	375	450	500	950	1000	1500	
External Dimension (Inch)																
Width	20	22	26	23	41	48	48	81	18	23	27	27	48	48	81	
Depth	21	24	25	27	25	28	28	28	24	24	28	28	28	28	28	
Height	56	67	77	79	80	80	76	78	71	80	78	80	80	78	78	
Shelves	3	4	4	4	8	8	10	15	7	4	4	4	8	10	15	
No. of Door/Type	1/Glass	1/Glass	1/Glass	1/Glass	2/Glass	2/Glass	2/Glass	3/Glass	1/Glass	1/Glass	1/Glass	1/Glass	2/Glass	2/Glass	3/Glass	
Temperature Range - °C	10°C ~ 10°C									-16°C ~ -24°C						
Castors	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lock	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Electricals : 220V, 50Hz, Single phase specifications, features and colours are subject to change without any notice, due to continuous product development.

At 32°C ambient



ELANPRO®
The Commercial Refrigeration Experts



Call US : +91-98406 17999
Email : sales@divazconsulting.com
Website : www.divazconsultancy.com



FOR MORE DETAIL CONTACT
HEAD OFFICE

NO L13, 14, SIDCO 1ST MAIN RD, KODUNGAIYUR, CHENNAI,
TAMIL NADU 600118

BRANCH OFFICE

H.NO. 14-11-8, INFORMATION COLONY, THORRUR ROAD,
HYATH NAGAR, HYDERABAD, TELANGANA 501505

Exquisite ice Solution



Elanpro offers widest range of Ice cube and Ice Flaker Machines. They are known for their high performance and industry unique features like self diagnostic error system and elimination of online water system. Elanpro was the first to launch ice-machine which allows the use of Bottled Water eliminating need for online plumbing. All Elanpro machines are designed and fitted with high quality European Compressors and other components. Elanpro Ice machines can be seen in Top Hotels, Bars, Restaurants, Pubs, Cafe's and Life Science Industry.



EIM 41 BW / 61 BW

- Kitchen Solution • Bar Solution • Confectionery Solution • Ice Machine Solution • Room Solution
- Special Products Solution • Retail Solution • Supermarket Solution

Ice Machines

**Ice solution for
all your need**



EIM 101



EIM 201 / EIM 351 / EIM 501

Key Features:

- Low energy consumption
- Low water consumption per kg of ice produced
- Compatible Ice Storage Bins available separately at an extra cost.
- Air cooled
- Control board with display
- Option of flake & dice shape
- Vertical evaporator
- Stainless steel body
- Adjustable feet
- Pre Filter



Regular Cube
22 x 22 x 22



EFM 101 (Flakes)



EIM 1001

Model	EFM 101	EIM 35	EIM 41 BW*	EIM 61 BW*	EIM 101	EIM 201	EIM 351	EIM 501	EIM 1001
Compatible Bin Model	Inbuilt	Inbuilt	Inbuilt	Inbuilt	Inbuilt	B 275	B 375	B 375	B 775
Rated Capacity* (Kg/24 hrs)	100	30	36	55	95	191	318	455	909
Bin Size (Kg)	20	10	15	18	40	125	170	170	350
Machine Dim. (WxDxH) mm	520 x 550 x 960	460 x 430 x 800	500 x 450 x 800	500 x 590 x 850	660 x 685 x 920	560 x 830 x 1718	760 x 830 x 1718	760 x 830 x 1893	1227 x 973 x 2048
Power consumption/24hrs^	330 W	270 W	270 W	360 W	580 W	1100 W	1420 W	2300 W	3800 W
Water Consumption/24hrs^	110 L	50 L	40 L	80 L	150 L	286 L	477 L	682 L	1363 L
Cube Size (WxDxH) mm	NA	22 x 22 x 22	22 x 22 x 22	22 x 22 x 22	22 x 22 x 22				

Note : Note : EIM 41 HD / 101 HD are available with cube sizes of 13 x 22 x 22mm

* with online OR bottled water options.

* Rated capacity at 10°C Water and 21°C Air.

Call US : +91-98406 17999

Email : sales@divazconsulting.com

Website : www.divazconsultancy.com

ELANPRO®
The Commercial Refrigeration Experts

ICOLD
Cold Room

thingify()
Cold Chain Monitoring

FOR MORE DETAIL CONTACT

HEAD OFFICE

NO 113, 14, SIDCO 1ST MAIN RD, KODUNGAIYUR, CHENNAI,
TAMIL NADU 600118



BRANCH OFFICE
H.NO. 14-11-8, INFORMATION COLONY, THORRUR ROAD,
HYATH NAGAR, HYDERABAD, TELANGANA 501505

PROFESSIONAL REFRIGERATION FOR THE PERFECT **KITCHEN**



Elanpro's world class equipment has been developed over decades of painstakingly collected market research and customer experience. Our Freezers and Refrigerators come with high quality components from Europe and are known for reliability and performance. They are designed to work under tough Indian conditions. Elanpro machines can be found in Best Hotels, Bars, Restaurants, Pubs, Cafe's and QSR Chains



CBR-1

Salad, Prep & Under Counters - Static & Frost Free Series


Key Features:

- Stainless steel SS 304
- Dixell digital controller
- HACCP Compliance
- Heavy duty adjustable SS legs / Heavy duty lockable castors
- Environment Friendly Refrigerant
 - R134A for Chillers
 - R404A for Freezers



Key Features (as applicable):

- EBM Fan Motor
- Removable gasket
- Adjustable shelves
- Lock
- Built in handle

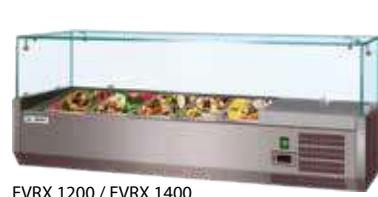

Optional Features:

- Left or Right side compressor
- Door or drawer options
- Back splash

Flexi Drawer Undercounter



Key Features:

- CFC Free Refrigerant
- User friendly controls with LED Temperature display
- Change drawer temperature from fridge to freezer at the touch of a button
- Auto energy saving hot gas defrost
- Removable gasket for easy cleaning
- GN 1/1 – 150 mm deep pan capacity maximizes available storage space
- Tropicalized to perform at 40°C ambient



Blast Chiller & Freezers

Key Features:

- CFC refrigerant and foam
- Complete structure interior & exterior in stainless steel with round internal edges for easy cleaning
- Self closing doors with easy to clean and replace magnetic balloon gasket
- Replaceable Electric door mullion heater
- 75mm thickness insulation for excellent thermal efficiency
- Ventilated refrigeration compartment
- Dixell controller and compact footprints
- Danfoss refrigeration components
- EBM Fan

Premium Series

	Model	Description	Capacity (Ltrs)	Dimension (WxDxH) mm	Temperature Range	GN Compatibility	No. of Shelves	Climate Class	Inside/Outside SS
FROST FREE	ES 900	2 Door Salad Under Counter	240	900 x 700 x 850	-2°C ~ 8°C	2 x GN 1/1 + 3 x GN 1/6	2	32°C	SS 304
	ES 903	3 Door Salad Under Counter	360	1365 x 700 x 850	-2°C ~ 8°C	4 x GN 1/1	3	32°C	SS 304
	EPS 200	2 Door Salad Under Counter with Prep Table	240	900 x 700 x 980	-2°C ~ 8°C	5 x GN 1/6	2	32°C	SS 304
	EPS 300	3 Door Salad Under Counter with Prep Table	360	1365 x 700 x 980	-2°C ~ 8°C	8 x GN 1/6	3	32°C	SS 304
	EVRX 1200	Salad Display Counter	NA	1200 x 335 x 225	-2°C ~ 8°C	5 x GN 1/4	NA	32°C	SS 304
	EVRX 1400	Salad Display Counter	NA	1400 x 335 x 225	-2°C ~ 8°C	6 x GN 1/4	NA	32°C	SS 304
	ESH 2000/800	2 Door Salad Under Counter with Prep Table	337	1510 x 800 x 1050	-2°C ~ 8°C	6 x GN 1/3	2	38°C	SS 304
	ESH 3000/800	3 Door Salad Under Counter with Prep Table	497	2020 x 800 x 1050	-2°C ~ 8°C	10 x GN 1/3	3	38°C	SS 304
	EGN 600 Fish	Reach In Fish Chiller	600	680 x 810 x 2000	-2°C ~ 8°C	NA	5	38°C	SS 304
	E3F	Frost Top	NA	1102 x 678 x 430	-10°C	NA	NA	38°C	SS 304

Due to continuous product development, specifications, features and colours are subject to change without notice. Manufactured as per European Technology and Standards. GN pans are optional.

*Selected models.

Flexi Drawer Undercounter

Model	Description	Capacity (Ltrs)	Dimension (WxDxH) mm	Temperature Range	GN Compatibility
CBR 1-2	Flexi Drawer Counter	78	905 x 700 x 565	1°C ~ 4°C / -18°C ~ -21°C	2xGN 1/1
CBR 1-3	Flexi Drawer Counter	116	1230 x 700 x 565	1°C ~ 4°C / -18°C ~ -21°C	3xGN 1/1
CBR 2-2	Flexi Drawer Counter	179	905 x 700 x 830	1°C ~ 4°C / -18°C ~ -21°C	4xGN 1/1
CBR 2-3	Flexi Drawer Counter	262	1230 x 700 x 830	1°C ~ 4°C / -18°C ~ -21°C	6xGN 1/1

Manufactured as per European Technology and Standards

GN Pan are optional

Blast Chiller & Freezer

Model	Dimension (WxDxH) mm	Capacity (Ltrs)	Cooling Capability [#]	Tray*	Power Supply	Cooling Mode
D5	800 x 815 x 1015	169	18 kg / 14 kg	5	230 V / 50 Hz	Ventilated
D10	800 x 815 x 1645	368	40 kg / 28 kg	10	230 V / 50 Hz	Ventilated
D14	800 x 815 x 2170	494	55 kg / 38 kg	14	380 V / 50 Hz	Ventilated

Specifications, features and colours are subject to change without any notice, due to continuous product development.

[#]70/3°C in 90 minute & 70/-18°C in 240 minute.



Call US : +91-98406 17999
 Email : sales@divazconsulting.com
 Website : www.divazconsultancy.com



FOR MORE DETAIL CONTACT

HEAD OFFICE

NO L13, 14, SIDCO 1ST MAIN RD, KODUNGAIYAR, CHENNAI,
TAMIL NADU 600018

BRANCH OFFICE

H.NO. 14-11-B, INFORMATION COLONY, THORUR ROAD,
HAYATH NAGAR, HYDERABAD, TELANGANA 501505

Elite Cooling for an Elegant Life Style !



Elanpro offers world class quality for its unmatched range of Mini bars and Mini fridges which allows leading hotel chains across the country to offer soundless room bar solution to their guests. Elanpro Minibars are patronized by leading brands like Taj, Sarovar, Holiday Inn, Crown Plaza, Hyatt and other major chains.



- Kitchen Solution • Bar Solution • Confectionery Solution • Ice Machine Solution • Room Solution
- Special Products Solution • Retail Solution • Supermarket Solution

Compressor Minibars



Key Features - Mini Fridge (RF Series)

- CFC free, R 600a refrigerant
- Low energy consumption and noise
- Available in elegant white colour
- Lock (Optional)
- Designed to perform at 35°C



RF 60 G

Absorption Minibars



Key Features - Minibar (RB Series)

- Ammonia refrigerant
- Very low energy consumption
- Silent operation
- Largest range to choose from
- Sizes : 15 to 60 ltrs
- Colour : Black, (Brown, & White) (MOQ 200 nos.)
- Design : Deluxe with solid door & Glass door
- Designed to perform at 27°C



RB 41G

Technical Specification

Model	RB 31	RB 31 G	RB 41	RB 41 G	RF 55	RF 56	RF 60 G
Door Option	Solid	Glass	Solid	Glass	Solid	Solid	Glass
Capacity Ltrs.	30	30	40	40	47	47	50
Input Power (W)	65	65	65	65	55	55	80
Energy Consumption (Kwh)	0.7	0.7	0.7	0.7	0.8	0.8	1.0
Temperature	20°C ~ 10°C						
Dimension (WxDxH) mm	402 x 440 x 500	402 x 428 x 500	402 x 465 x 560	402 x 453 x 560	470 x 445 x 500	470 x 445 x 500	475 x 435 x 525
Container (20/40 HC)	240/620	240/620	206/484	206/484	220/575	220/575	220/550

Note : Specifications, features and colours are subject to change without any notice, due to continuous product development.

Certifications CE/CB/UL

RB 31/31G are against confirmed order.

ELANPRO®
The Commercial Refrigeration Experts

ICOLD
Cold Room

thingify
Cold Chain Monitoring

Call US : +91-98406 17999

Email : sales@divazconsulting.com

Website : www.divazconsultancy.com



FOR MORE DETAIL CONTACT

HEAD OFFICE

NO L13, 14, SIDCO 1ST MAIN RD, KODUNGAIYUR, CHENNAI,
TAMIL NADU 600118

BRANCH OFFICE

H.NO. 14-11-B, INFORMATION COLONY, THORRUR ROAD,
HAYATH NAGAR, HYDERABAD, TELANGANA 501505

