

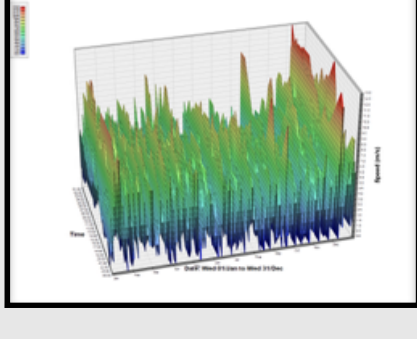
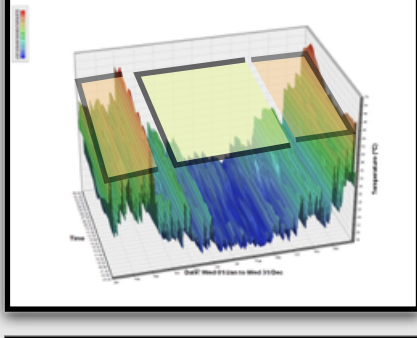
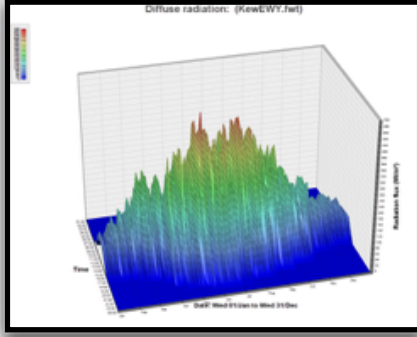
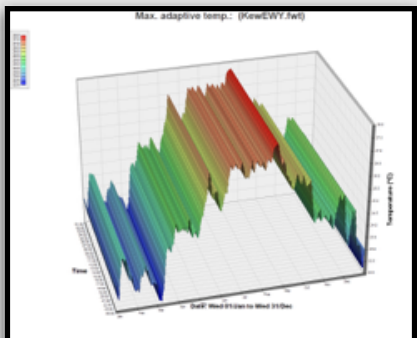
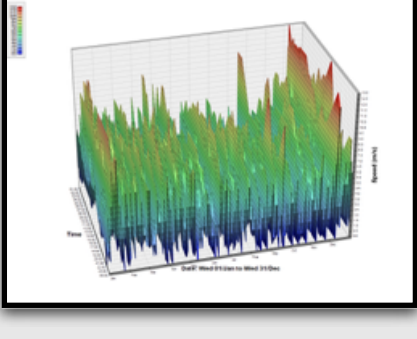
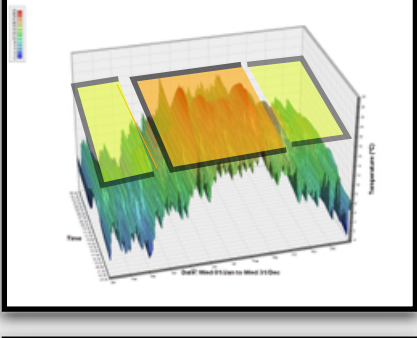
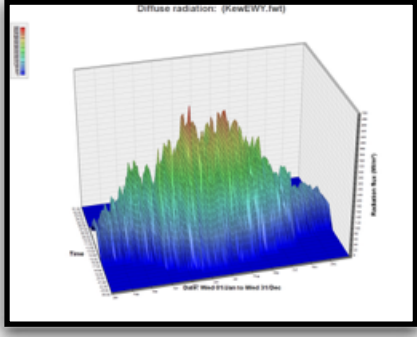
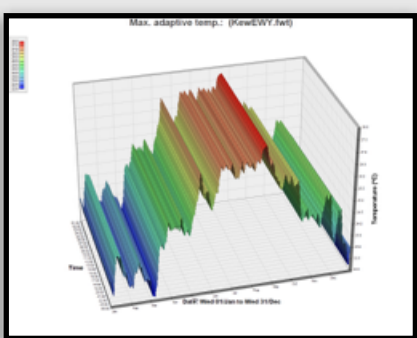
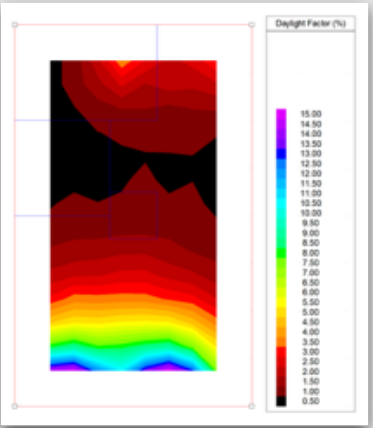
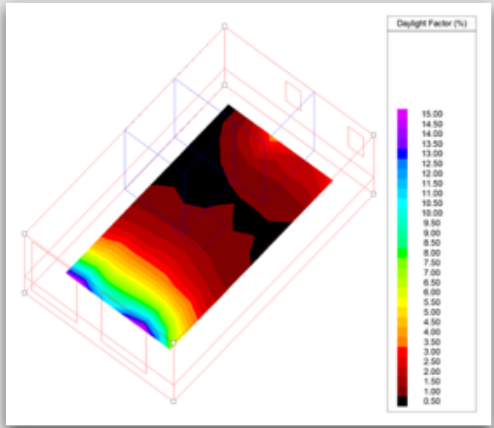
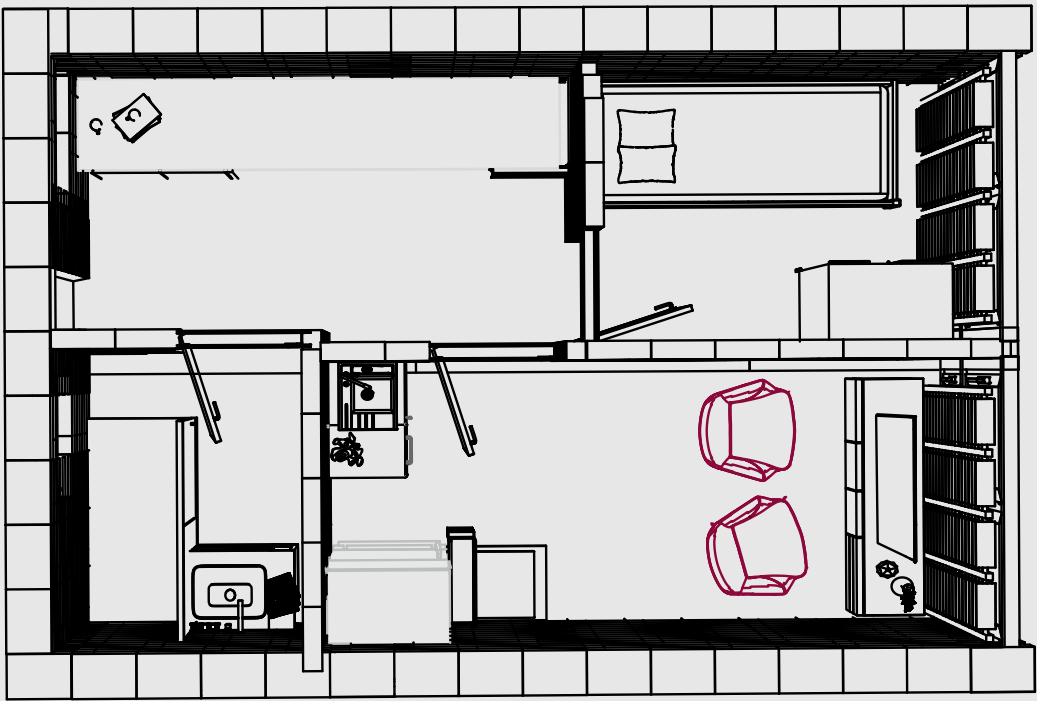
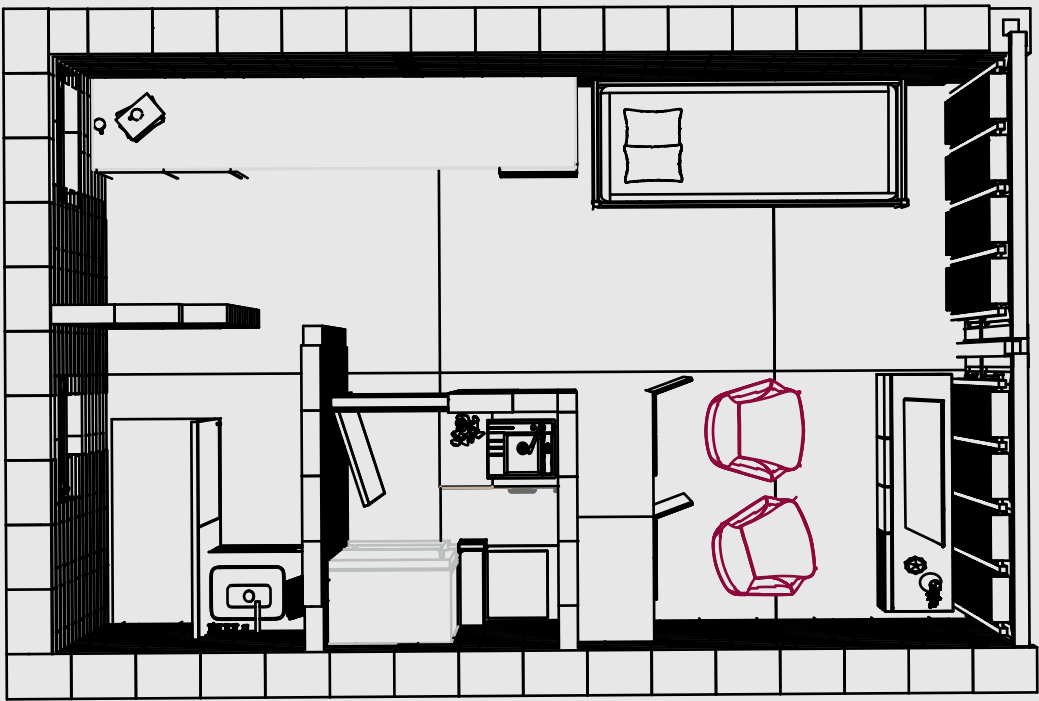
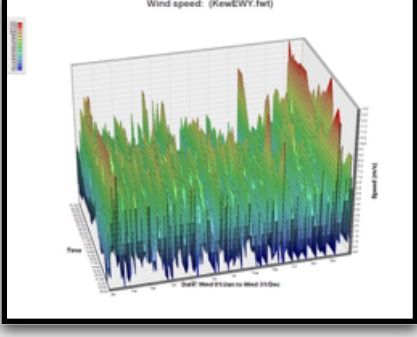
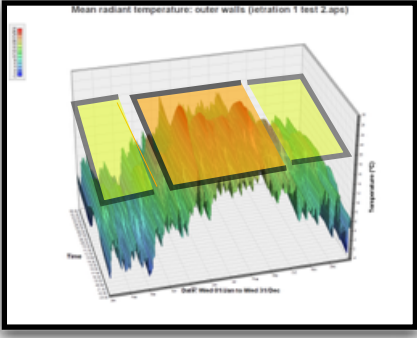
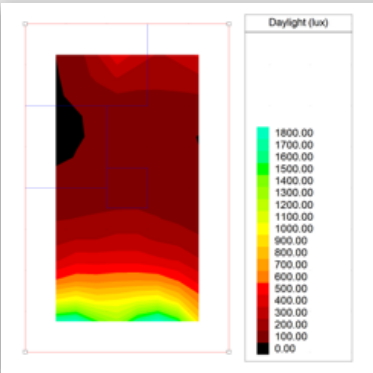
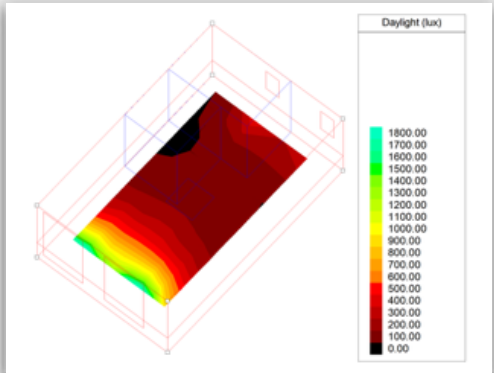
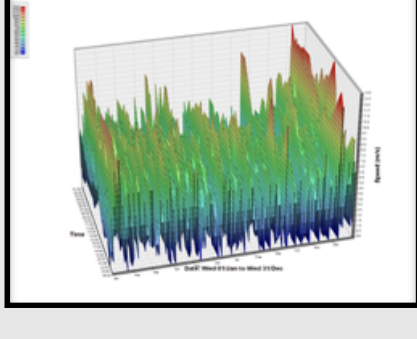
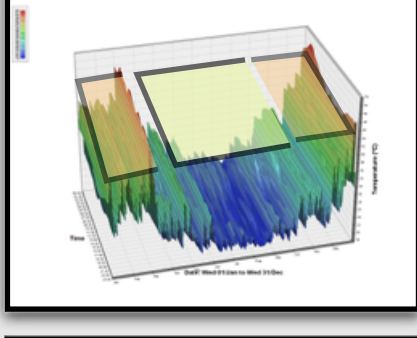




The high daylight factor and LUX level indicates the room is well lit but can be seen as too bright in areas. Light travels clearly through the entire space

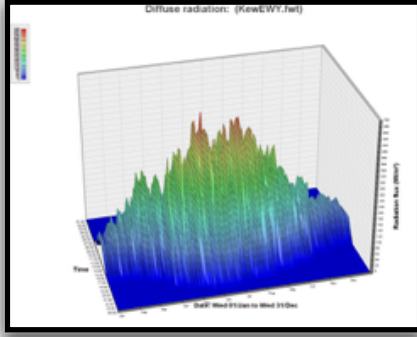













The first design uses an open floor plan to allow for a bigger space. The mean radiant temperature showed an interesting outcome and the open space is not as good. Higher temperatures in summer and lower temperatures in winter, this result is not describable but shows clear zoom for improvement.

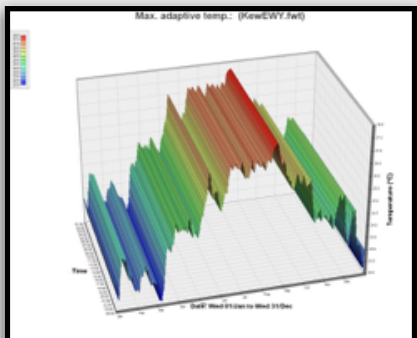

The daylight factor and LUX level indicates the room is well lit but has issues in areas that aren't close to the windows. Light travels through the space but doesn't perform as well as number 1.

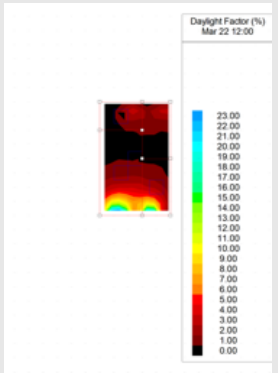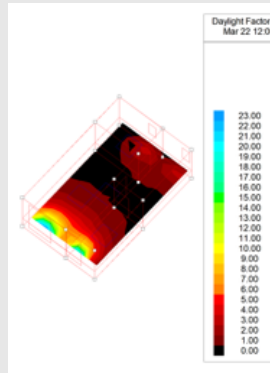

The second design uses a closed floor plan to allow for a confined spaces. This space had different results with a high mean radiant temperature in winter and low mean radiant temperature in summer which is preferable in the United Kingdom. Showing that hempcrete performs better within confined spaces regulating internal conditions effectively due to its hygroscopic nature.

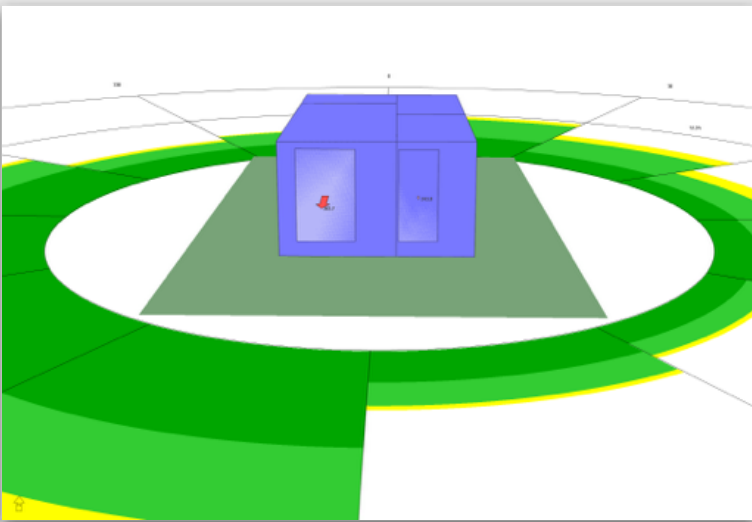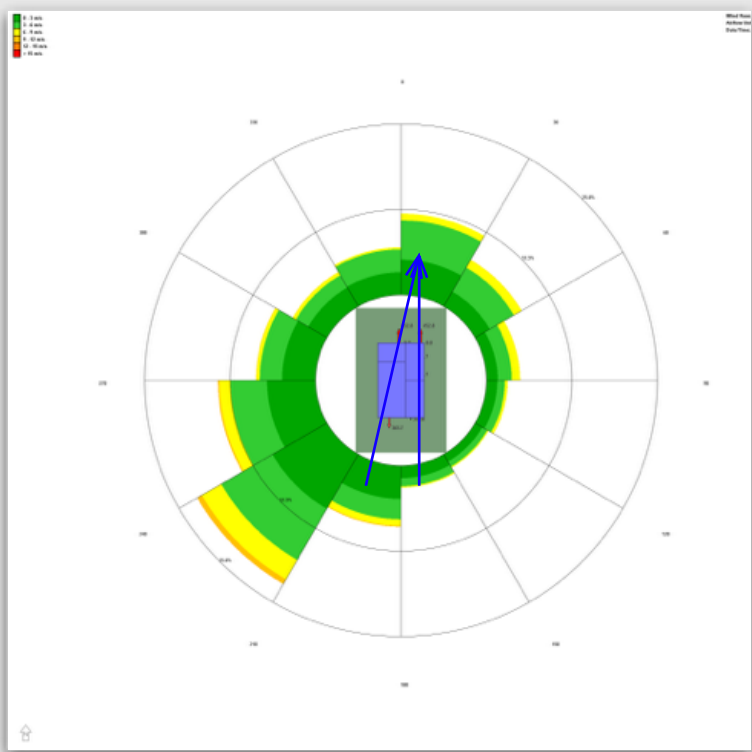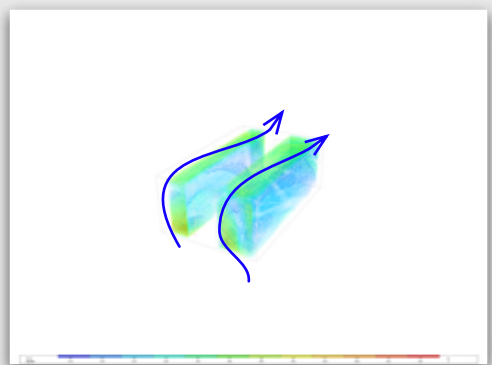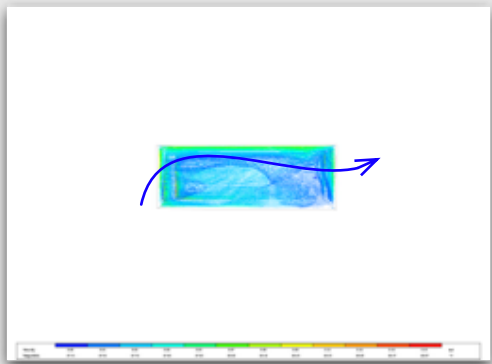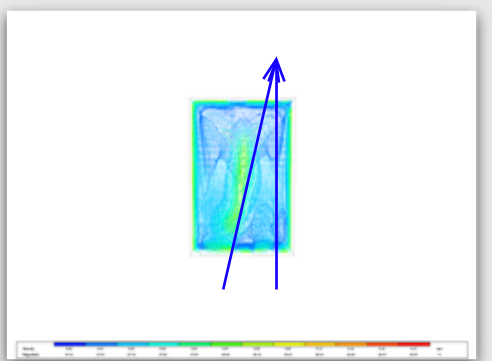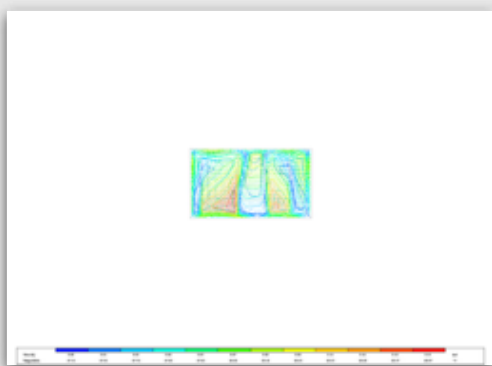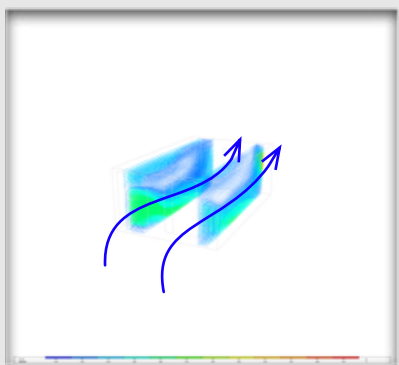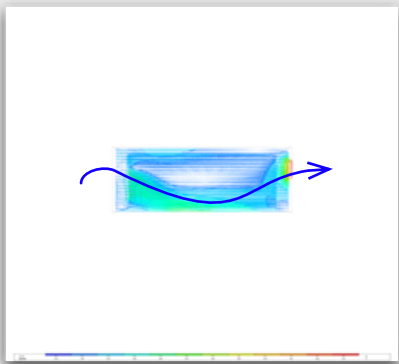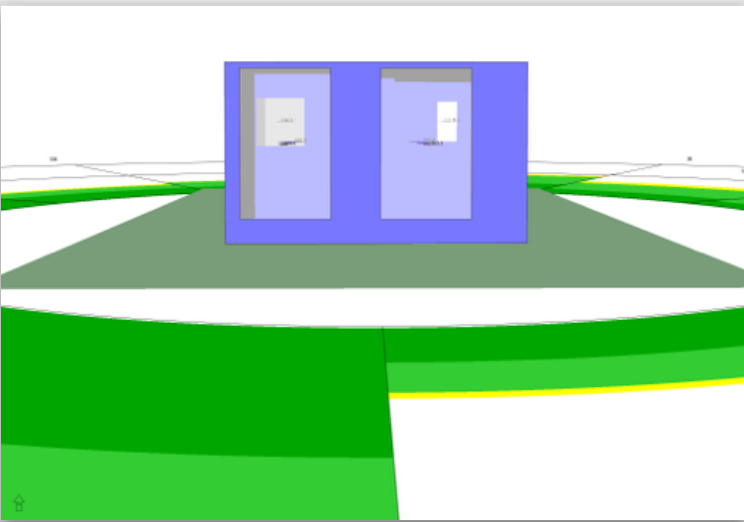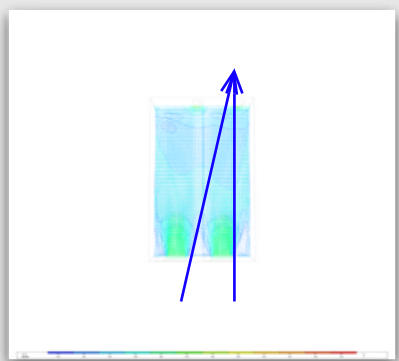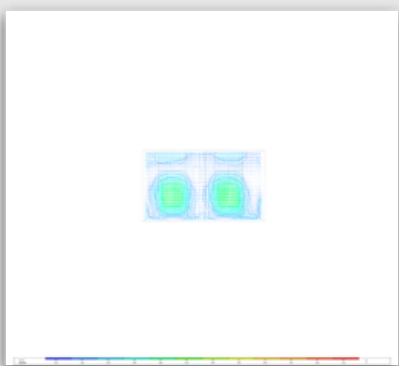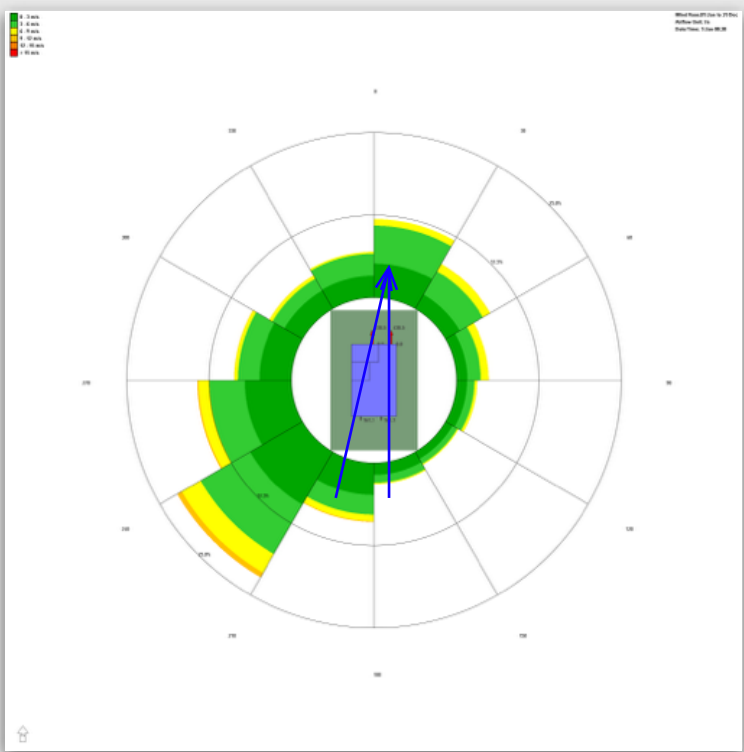

Two opening for cross ventilation lets air pass through the space freely. The closed space lets air travel above the inhabitants and has less effect on those using the space airing the unit and leaving with no issues from wind currents.