


Bypass STLink:

1. JP5 open
2. Remove SB12
3. Power on NUCLEO by net "+5V"
4. Power on STLink by USB

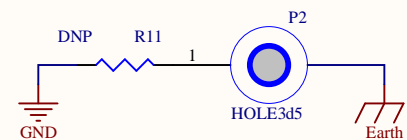

Title		
Size	Number	Revision
A4		
Date:	1/22/2021	Sheet of
File:	E:\Project\...\BackBoard.SchDoc	Drawn By: