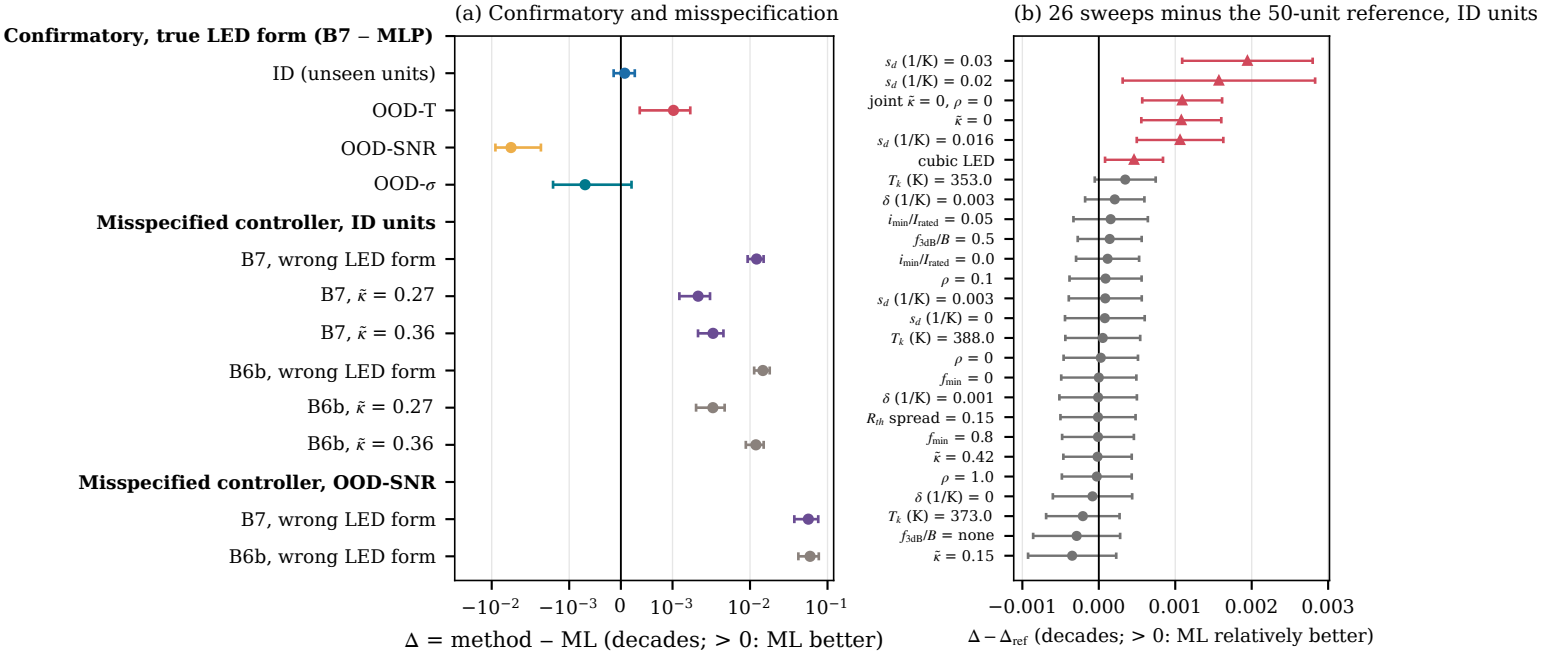
(a) Confirmatory and misspecification
Confirmatory, true LED form (B7 – MLP)
ID (unseen units)
OOD-T
OOD-SNR
OOD-σ
Misspecified controller, ID units
B7, wrong LED form
B7, κ̃ = 0.27
B7, κ̃ = 0.36
B6b, wrong LED form
B6b, κ̃ = 0.27
B6b, κ̃ = 0.36
Misspecified controller, OOD-SNR
B7, wrong LED form
B6b, wrong LED form
−10⁻² −10⁻³ 0 10⁻³ 10⁻² 10⁻¹
Δ = method − ML (decades; > 0: ML better)
(b) 26 sweeps minus the 50-unit reference, ID units
s_d (1/K) = 0.03
s_d (1/K) = 0.02
joint κ̃ = 0, ρ = 0
κ̃ = 0
s_d (1/K) = 0.016
cubic LED
T_k (K) = 353.0
δ (1/K) = 0.003
i_min/I_rated = 0.05
f_3dB/B = 0.5
i_min/I_rated = 0.0
ρ = 0.1
s_d (1/K) = 0.003
s_d (1/K) = 0
T_k (K) = 388.0
ρ = 0
f_min = 0
δ (1/K) = 0.001
R_th spread = 0.15
f_min = 0.8
κ̃ = 0.42
ρ = 1.0
δ (1/K) = 0
T_k (K) = 373.0
f_3dB/B = none
κ̃ = 0.15
−0.001 0.000 0.001 0.002 0.003
Δ − Δ_ref (decades; > 0: ML relatively better)