Keysight 3458A Multimeter

Shattering performance barriers of speed and accuracy

Data Sheet

KEYSIGHT TECHNOLOGIES

Performance Highlights

DC volts
– 5 ranges: 0.1 V to 1000 V
– 8.5 to 4.5 digit resolution
– Up to 100,000 readings/sec
  (4.5 digits)
– Maximum sensitivity: 10 nV
– 0.6 ppm 24 hour accuracy
– 8 ppm (4 ppm optional)/year
  voltage reference stability

Ohms
– 9 ranges: 10 Ω to 1 GΩ
– Two-wire and four-wire ohms with
  offset compensation
– Up to 50,000 readings/sec
  (5.5 digits)
– Maximum sensitivity: 10 µΩ
– 2.2 ppm 24 hour accuracy

AC volts
– 6 ranges: 10 mV to 1000 V
– 1 Hz to 10 MHz bandwidth
– Up to 50 readings/sec with all
  readings to specified accuracy
– Choice of sampling or analog true
  rms techniques
– 100 ppm best accuracy

DC current
– 8 ranges: 100 nA to 1 A
– Up to 1,350 readings/sec
  (5.5 digits)
– Maximum sensitivity: 1 pA
– 14 ppm 24 hour accuracy

AC current
– 5 ranges: 100 µA to 1 A
– 10 Hz to 100 kHz bandwidth
– Up to 50 readings/sec
– 500 ppm 24 hour accuracy

Frequency and period
– Voltage or current ranges
– Frequency: 1 Hz to 10 MHz
– Period: 100 ns to 1 sec
– 0.01% accuracy
– AC or DC coupled

Maximum speeds
– 100,000 readings/sec at 4.5 digits
  (16 bits)
– 50,000 readings/sec at 5.5 digits
– 6,000 readings/sec at 6.5 digits
– 60 readings/sec at 7.5 digits
– 6 readings/sec at 8.5 digits

Measurement set-up speed
– 100,000 readings/sec over GPIB or
  with internal memory
– 110 autoranges/sec
– 340 function or range changes/sec
– Post-processed math from internal
  memory

Access Speed and Accuracy
Through a Powerful, Convenient Front Panel

Display
– Bright, easy-to-read, vacuum fluorescent display
– 16 character alpha-numeric display to easily read data, messages, and commands

Standard function/range keys
– Simple to use, for bench measurements of DCV, ACV, ohms, current, frequency and period
– Select autorange or manual ranging

Menu command keys
– Immediate access to eight common commands
– Shifted keys allow simple access to complete command menu

Numeric/user keys
– Numeric entry for constants and measurement parameters
– Shifted keys (f0 through f9) access up to ten user-defined setups

Volts/ohms/ratio terminals
– Gold-plated tellurium copper for minimum thermal emf
– 2-wire or 4-wire ohms measurements
– DC/DC or AC/DC ratio inputs

Current measurement terminals
– Easy fuse replacement with fuse holder built into terminal

Guard terminal and switch
– For maximum common mode noise rejection

Front-rear terminal switch
– Position selects front or rear measurement terminals

External output:
– Programmable TTL output pulse with 5 modes for flexible system interface
– Defaults to a voltmeter complete pulse

Rear input terminals for convenient system use

External trigger input

GPIB interface connector

3
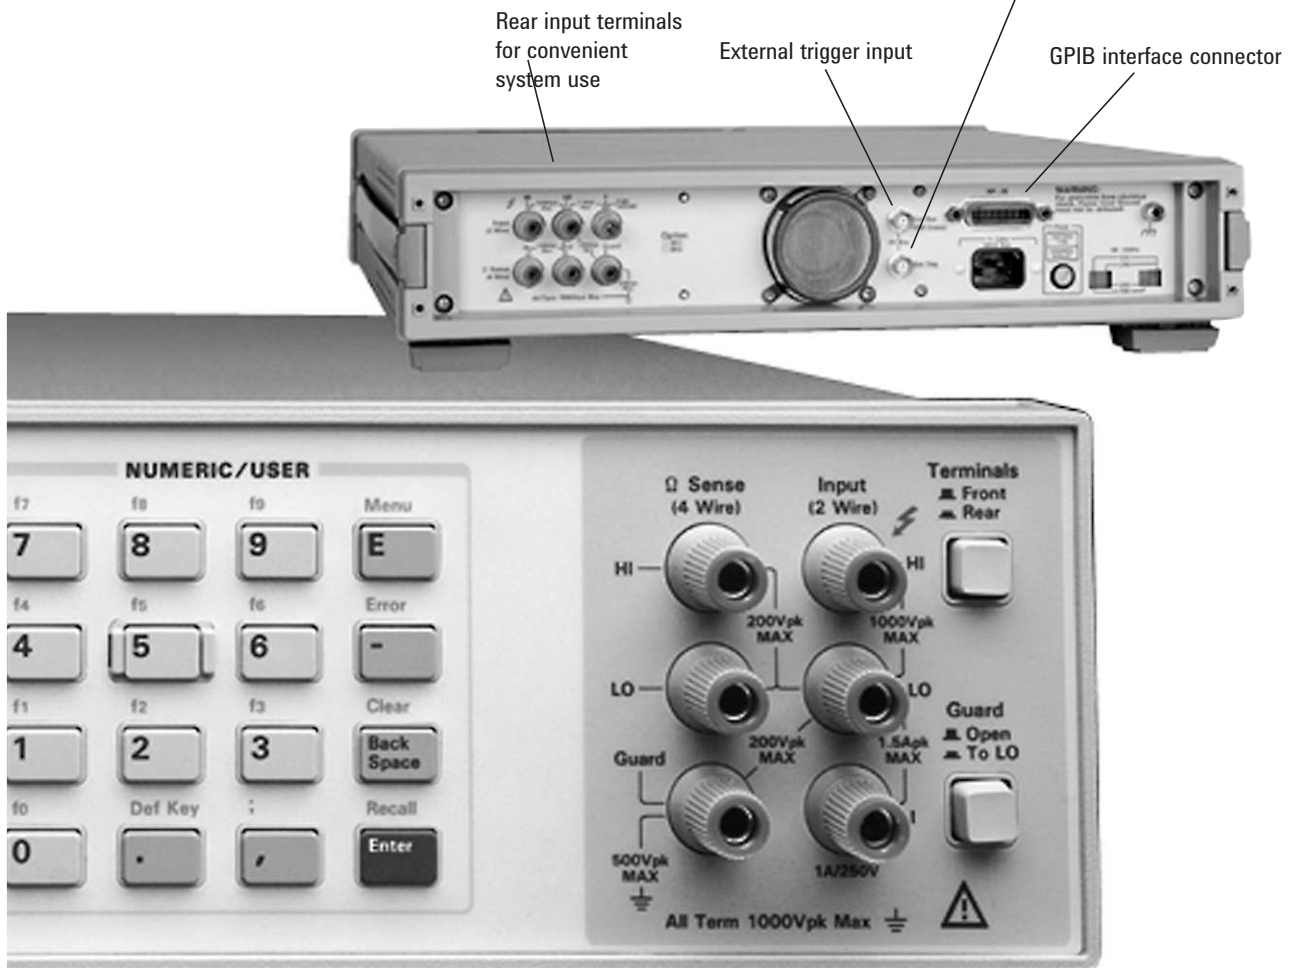
A System Multimeter with BOTH High Speed and High Accuracy

The Keysight Technologies, Inc. 3458A Multimeter shatters long-standing performance barriers of speed and accuracy on the production test floor, in R&D, and in the calibration lab. The 3458A is simply the fastest, most flexible, and most accurate multimeter ever offered by Keysight. In your system or on the bench, the 3458A saves you time and money with unprecedented test system throughput and accuracy, seven function measurement flexibility, and low cost of ownership.

Select a reading rate of 100,000 readings/second for maximal test throughput. Or achieve highest levels of precision with up to 8.5 digits of measurement resolution and 0.1 part per million transfer accuracy. Add to this, programming compatibility through the Keysight Multimeter Language (ML) and the 3458A's simplicity of operation and you have the ideal multimeter for your most demanding applications.

Contents

The 3458A Multimeter for:

High test system throughput

Faster testing
– Up to 100,000 readings/sec
– Internal test setups > 340/sec
– Programmable integration times from 500 ns to 1 sec

Greater test yield
– More accuracy for tighter test margins
– Up to 8.5 digits resolution

Longer up-time
– Two-source (10 V,10 kΩ) calibration, including AC
– Self-adjusting, self-verifying auto-calibration for all functions and ranges, including AC
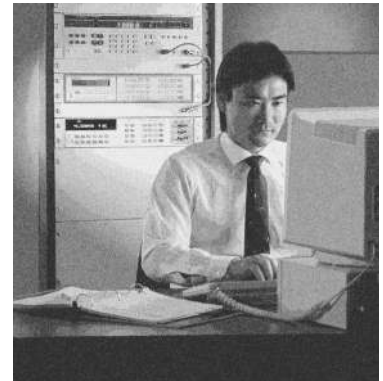
Calibration lab precision

Superb transfer measurements
– 8.5 digits resolution
– 0.1 ppm DC volts linearity
– 0.1 ppm DC volts transfer capability
– 0.01 ppm rms internal noise

Extraordinary accuracy
– 0.6 ppm for 24 hours in DC volts
– 2.2 ppm for 24 hours in ohms
– 100 ppm mid-band AC volts
– 8 ppm (4 ppm optional) per year voltage reference stability

High resolution digitizing

Greater waveform resolution and accuracy
– 16 to 24 bits resolution
– 100,000 to 0.2 samples/sec
– 12 MHz bandwidth
– Timing resolution to 10 ns
– Less than 100 ps time jitter
– Over 75,000 reading internal memory
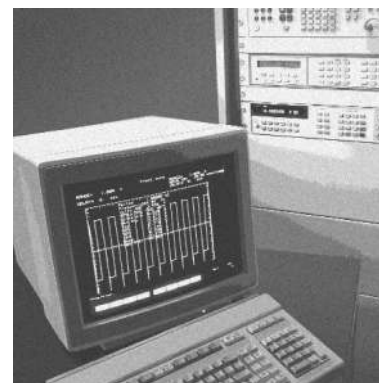
For High Test System Throughput

– Faster system start-up
  Multimeter Language (ML) compatible

– Faster measurements and setups
  100,000 readings/sec in 4.5 digits
  50,000 readings/sec in 5.5 digits
  340 function or range changes/sec

– Longer system up-time
  Multimeter Language (ML) compatible
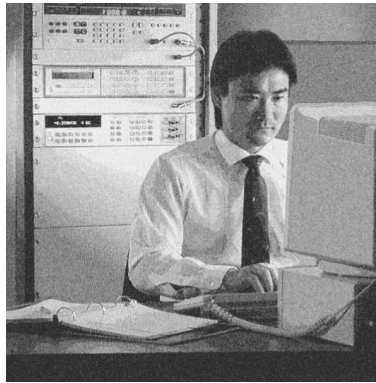
The Keysight 3458A System Multimeter heightens test performance in three phases of your production test: faster test system start-up, faster test throughput, and lower cost of ownership through longer system uptime, designed-in reliability, and fast and easy calibration.

Faster system start-up
The value of a fast system multimeter in production test is clear. But it is also important that the dmm programs easily to reduce the learning time for new system applications. The Keysight Multimeter Language (ML) offers a standard set of commands for the multimeter user that consists of easily understood, readable commands. Easier programming and clearer documentation reduce system development time.

Faster measurements and setups
Now you can have a system dmm with both fast and accurate measurements. The 3458A optimizes your measurements for the right combination of accuracy, resolution, and speed. The 3458A Multimeter fits your needs from 4.5 digit DC volts measurements at 100,000/second, to 8.5 digit DC volts measurements at 6/second, or anywhere in between in 100 ns steps.

Even the traditionally slower measurement functions, such as AC volts, are quicker with the 3458A. For example, you can measure true rms ACV at up to 50 readings/second with full accuracy for input frequencies greater than 10 kHz.

Besides high reading rates, the 3458A's design was tuned for the many function and level changes required in testing your device. The 3458A can change function and range, take a measurement, and output the result at 340/second. This is at least 5 times faster than other dmms. In addition, the 3458A transfers high speed measurement data over GPIB or into and out of its 75,000 reading memory at 100,000 readings/second.

You can reduce your data transfer overhead by using the unique non-volatile program memory of the 3458A to store complete measurement sequences. These test sequences can be programmed and initiated from the front panel for stand-alone operation without a controller.

Finally, the 3458A Multimeter makes fast and accurate measurements. Consider the 3458A's 0.6 ppm 24 hour DC volts accuracy, 100 ppm AC volts accuracy and its standard functions of DCV, ACV, DCI, ACI, ohms, frequency and period. Greater measurement accuracy from your dmm means higher confidence and higher test yields. More functions mean greater versatility and lower-cost test systems.

Longer system up-time
The 3458A Multimeter performs a complete self-calibration of all functions, including AC, using high stability internal standards. This self- or auto-calibration eliminates measurement errors due to time drift and temperature changes in your rack or on your bench for superior accuracy. When it's time for periodic calibration to external standards, simply connect a precision 10 VDC source and a precision 10 kΩ resistor. All ranges and functions, including AC, are automatically calibrated using precision internal ratio transfer measurements relative to the external standards.

The 3458A's reliability is a product of Keysight's "10X" program of defect reduction. Through extensive environmental, abuse, and stress testing during the design stages of product development, has reduced the number of defects and early failures in its instruments by a factor of ten over the past ten years. Our confidence in the 3458A's reliability is reflected in the low cost of the option for additional years of return-to-repair.

For Calibration Lab Precision

– 8.5 digits resolution
– 0.1 ppm DCV linearity
– 100 ppm ACV absolute
  accuracy
– 4 ppm/year optional
  stability

In the calibration lab, you'll find the 3458A's 8.5 digits to have extraordinary linearity, low internal noise, and excellent short term stability. The linearity of the 3458A's Multislope A to D converter has been characterized with state-of-the-art precision. Using Josephsen Junction Array intrinsic standards, linearity has been measured within ± 0.05 ppm of 10 volts. The 3458A's transfer accuracy for 10 volts DC is 0.1 ppm over 1 hour ± 0.5° C. Internal noise has been reduced to less than 0.01 ppm rms yielding 8.5 digits of usable resolution. So, the right choice for your calibration standard dmm is the 3458A.

DCV stability
The long term accuracy of the 3458A is a remarkable 8 ppm per year—more accurate than many system dmms are after only a day. Option 002 gives you a higher stability voltage reference specified to 4 ppm/year for the ultimate performance.

Reduced–error resistance
The 3458A doesn't stop with accurate DCV. Similar measurement accuracy is achieved for resistance, ACV, and current. You can measure resistance from 10 μΩ to 1 GΩ with midrange accuracy of 2.2 ppm.

Finally, the 3458A, like its dmm predecessors, offers offset-compensated ohms on the 10 Ω to 100 kΩ ranges to eliminate the errors introduced by small series voltage offsets. Usable for both two- and four-wire ohms, the 3458A supplies a current through the unknown resistance, measures the voltage drop, sets the current to zero, and measures the voltage drop again. The result is reduced error for resistance measurements.

Precision ACV
The 3458A introduces new heights of true rms AC volts performance with a choice of traditional analog or a new sampling technique for higher accuracy. For calibration sources and periodic waveforms from 1 Hz to 10 MHz, the 3458A's precision sampling technique offers extraordinary accuracy. With 100 ppm absolute accuracy for 45 Hz to 1 kHz or 170 ppm absolute accuracy to 20 kHz, the 3458A will enhance your measurement capabilities. Accuracy is maintained for up to 2 years with only a single 10 volt DC precision standard. No AC standards are necessary. For higher speed and less accuracy, the analog true rms AC technique has a midband absolute measurement accuracy of 300 ppm using the same simple calibration procedure. With a bandwidth of 10 Hz to 2 MHz and reading rates to 50/second, is an excellent choice for high throughput computer-aided testing.

Easy calibration
The 3458A gives you low cost of ownership with a simple, two-source electronic calibration. With its superior linearity, the 3458A is fully calibrated, including AC, from a precision 10 VDC source and a precision 10 kΩ resistor. All ranges and functions are automatically calibrated using precise internal ratio transfer measurements relative to these external standards. In addition, the 3458A's internal voltage standard and resistance standard are calibrated. Now you can perform a self-verifying, self- or auto-calibration relative to the 3458A's low drift internal standards at any time with the ACAL command. So, if your dmm's environment changes, auto-calibration optimizes your measurement accuracy.

Calibration security
Unlike other dmms, the 3458A goes to great lengths to assure calibration security. First, a password security code "locks" calibration values and the self-calibration function. Next, you can easily store and recall a secured message for noting items, such as calibration date and due date. Plus, the 3458A automatically increments a calibration counter each time you "unlock" the dmm — another safeguard against calibration tampering. If you have a unique situation or desire ultimate security, use the internal dmm hardwired switch to force removal of the instrument covers to perform calibration.

For High Resolution Digitizing

- 16 bits at
  100,000 samples/sec
- Effective rates to
  100 Msamples/sec
- Signal bandwidth of
  12 MHz
- 10 ns timing with < 100 ps
  jitter
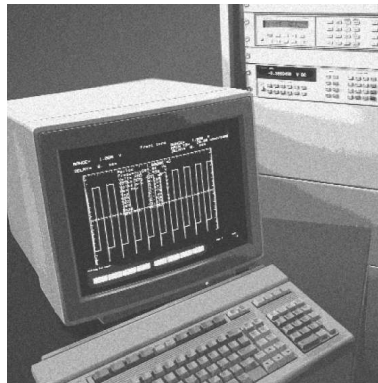
Easily acquire waveforms
Simple, application-oriented commands in the Keysight Multimeter Language (ML) make the task of waveform digitizing as easy as measuring DCV. Simply specify the sweep rate and number of samples.
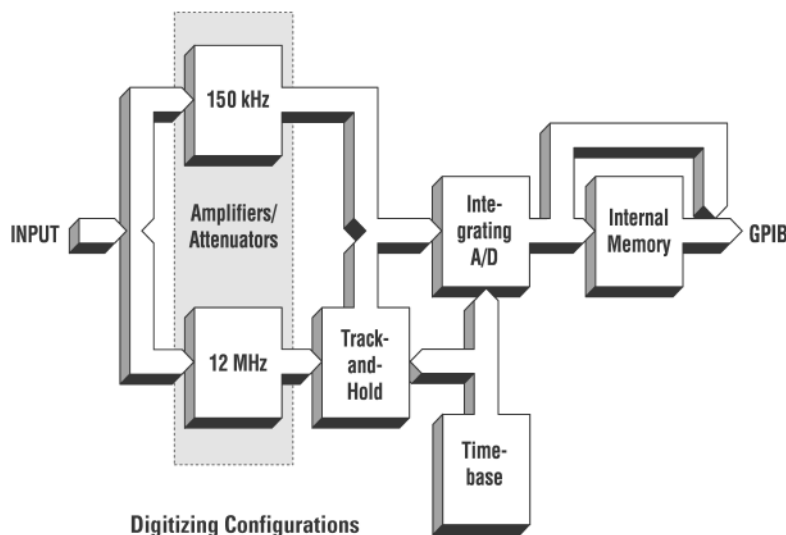
Integration or track–and–hold paths
The 3458A gives you the choice of two configurations for high speed measurements: a 150 kHz bandwidth integrating path with a variable aperture from 500 ns to 1 second or a 12 MHz bandwidth path with a fixed 2 ns aperture and 16-bit track-and-hold. Use the integration path for lower noise, but use the track-and-hold path to precisely capture the voltage at a single point on a waveform.

Direct sampling function
The 3458A has two sampling functions for digitizing wave-forms: direct sampling and sequential or sub-sampling. With direct sampling, the 3458A samples through the 12 MHz path followed by the 2 ns track-and-hold providing 16 bits of resolution. The maximum sample rate is 50,000 samples/second or 20 µs between samples. Samples can be internally paced by a 0.01% accurate timebase with time increments in 100 ns steps. Data transfers directly to your computer at full speed or into the dmm's internal reading memory. Waveform reconstruction consists of simply plotting the digitized voltage readings versus the sampling interval of the timebase.

Sequential sampling function
Sequential or sub-sampling uses the same measurement path as direct sampling; however sequential sampling requires a periodic input signal. The 3458A will synchronize to a trigger point on the waveform set by a level threshold or external trigger. Once synchronized, the dmm automatically acquires the waveform through digitizing successive periods with time increment steps as small as 10 ns, effectively digitizing at rates up to 100 Msamples/second. All you specify is the effective timebase and the number of samples desired, the 3458A automatically optimizes its sampling to acquire the waveform in the least amount of time. Then, for your ease of use, the 3458A automatically re-orders the data in internal memory to reconstruct the waveform.

Digitizing Configurations

3458A Technical Specifications

Introduction

The Keysight 3458A accuracy is specified as a part per million (ppm) of the reading plus a ppm of range for DCV, Ohms, and DCI. In ACV and ACI, the specification is percent of reading plus percent of range. Range means the name of the scale, e.g. 1 V, 10 V, etc.; range does not mean the full scale reading, e.g. 1.2 V, 12 V, etc. These accuracies are valid for a specific time from the last calibration.

Absolute versus Relative Accuracy

All 3458A accuracy specifications are relative to the calibration standards. Absolute accuracy of the 3458A is determined by adding these relative accuracies to the traceability of your calibration standard. For DCV, 2 ppm is the traceability error from the factory. That means that the absolute error relative to the U.S. National Institute of Standards and Technology (NIST) is 2 ppm in addition to the DCV accuracy specifications. When you recalibrate the 3458A, your actual traceability error will depend upon the errors from your calibration standards. These errors will likely be different from the error of 2 ppm.

Caution: This is a sensitive measurement apparatus by design and may have some performance loss when exposed to ambient continuous electromagnetic phenomenon

EXAMPLE 1:
Relative Accuracy; 24 hour operating temperature is Tcal ±1 °C

Assume that the ambient temperature for the measurement is within ± 1 °C of the temperature of calibration (Tcal). The 24 hour accuracy specification for a 10 V DC measurement on the 10 V range is 0.5 ppm + 0.05 ppm. That accuracy specification means:

0.5 ppm of Reading + 0.05 ppm of Range

For relative accuracy, the error associated with the measurement is:

(0.5/1,000,000 x 10 V) + (0.05/1,000,000 x 10 V) = ± 5.5 µV or 0.55 ppm of 10 V

Errors from temperature changes

The optimum technical specifications of the 3458A are based on auto-calibration (ACAL) of the instrument within the previous 24 hours and following ambient temperature changes of less than ±1 °C. The 3458A's ACAL capability corrects for measurement errors resulting from the drift of critical components from time and temperature.

The following examples illustrate the error correction of auto-calibration by computing the relative measurement error of the 3458A for various temperature conditions. Constant conditions for each example are:

10 V DC input
10 V DC range
Tcal = 23 °C
90 day accuracy specifications

EXAMPLE 2:
Operating temperature is 28 °C; with ACAL

This example shows basic accuracy of the 3458A using auto-calibration with an operating temperature of 28 °C. Results are rounded to 2 digits.

(4.1 ppm x 10 V) + (0.05 ppm x 10 V) = 42 µV

Total relative error = 42 µV

EXAMPLE 3:
Operating temperature is 38 °C; without ACAL

The operating temperature of the 3458A is 38 °C, 14 °C beyond the range of Tcal ±1 °C. Additional measurement errors result because of the added temperature coefficient without using ACAL.

(4.1 ppm x 10 V) + (0.05 ppm x 10 V) = 42 µV

Temperature Coefficient (specification is per °C):

(0.5 ppm x 10 V + 0.01 ppm x 10 V) x 14 °C = 71 µV

Total error = 113 µV

EXAMPLE 4:
Operating temperature is 38°C; with ACAL

Assuming the same conditions as Example 3, but using ACAL significantly reduces the error due to temperature difference from calibration temperature. Operating temperature is 10 °C beyond the standard range of Tcal ±5 °C.

(4.1 ppm x 10 V) + (0.05 ppm x 10 V) = 42 µV

Temperature Coefficient (specification is per °C):

(0.15 ppm x 10 V + 0.01 ppm x 10 V) x 10 °C = 16 µV

Total error = 58 µV

EXAMPLE 5:
Absolute Accuracy; 90 Day

Assuming the same conditions as Example 4, but now add the traceability error to establish absolute accuracy.

(4.1 ppm x 10 V) + (0.05 ppm x 10 V) = 42 µV

Temperature Coefficient (specification is per °C):

(0.15 ppm x 10 V + 0.01 ppm x 10 V) x 10 °C = 16 µV

factory traceability error of 2 ppm:

(2 ppm x 10 V) = 20 µV

Total absolute error = 78 µV

Additional errors

When the 3458A is operated at power line cycles below 100, additional errors due to noise and gain become significant. Example 6 illustrates the error correction at 0.1 PLC.

EXAMPLE 6:
Operating temperature is 28°C; 0.1 PLC

Assuming the same conditions as Example 2, but now add additional error.

(4.1 ppm x 10 V) + (0.05 ppm x 10 V) = 42 µV

Referring to the Additional Errors chart and RMS Noise Multiplier table, additional error at 0.1 PLC is:

(2 ppm x 10 V) + (0.4 ppm x 1 x 3 x 10 V) = 32 µV

Total relative error = 74 µV

Section 1: DC Voltage

DC Voltage

Range	Full Scale	Maximum Resolution	Input Impedance	Temperature Coefficient (ppm of Reading + ppm of Range) / °C	
				Without ACAL[1]	With ACAL[2]
100 mV	120.00000	10 nV	> 10 GΩ	1.2 + 1	0.15 + 1
1 V	1.20000000	10 nV	> 10 GΩ	1.2 + 0.1	0.15 + 0.1
10 V	12.0000000	100 nV	> 10 GΩ	0.5 + 0.01	0.15 + 0.01
100 V	120.000000	1 μV	10 MΩ ± 1%	2 + 0.4	0.15 + 0.1
1000 V	1050.00000	10 μV	10 MΩ ± 1%	2 + 0.04	0.15 + 0.01

Accuracy[3] [ppm of Reading (ppm of Reading for Option 002) + ppm of Range]

Range	24 Hour[4]	90 Day[5]	1 Year[5]	2 Year[5]
100 mV	2.5 + 3	5.0 (3.5) + 3	9 (5) + 3	14 (10) + 3
1 V	1.5 + 0.3	4.6 (3.1) + 0.3	8 (4)+ 0.3	14 (10) + 0.3
10 V	0.5 + 0.05	4.1 (2.6) + 0.05	8 (4) + 0.05	14 (10) + 0.05
100 V	2.5 + 0.3	6.0 (4.5) + 0.3	10 (6)+ 0.3	14 (10) + 0.3
1000 V[6]	2.5 + 0.1	6.0 (4.5) + 0.1	10 (6) + 0.1	14 (10) + 0.1

Transfer Accuracy/Linearity

Range	10 Min, Tref ± 0.5°C (ppm of Reading + ppm of Range)
100 mV	0.5 + 0.5
1 V	0.3 + 0.1
10 V	0.05 + 0.05
100 V	0.5 + 0.1
1000 V	1.5 + 0.05

Conditions
- Following 4 hour warm-up. Full scale to 10% of full scale.
- Measurements on the 1000 V range are within 5% of the initial measurement value and following measurement settling.
- Tref is the starting ambient temperature.
- Measurements are made on a fixed range (> 4 min.) using accepted metrology practices.

Settling Characteristics

For first reading or range change error, add 0.0001% of input voltage step additional error.
Reading settling times are affected by source impedance and cable dielectric absorption characteristics.

Additional Errors

ppm (log scale)

Additional Gain Error (ppm of rdg)

RMS Noise * (ppm of range)

Integration Time in Number Power Line Cycles (NPLC, log scale)
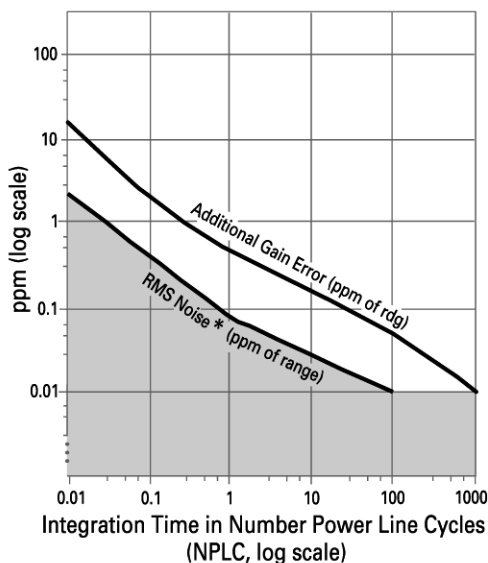
Noise Rejection (dB) [7]

	AC NMR[8]	AC ECMR	DC ECMR
NPLC < 1	0	90	140
NPLC ≥ 1	60	150	140
NPLC ≥ 10	60	150	140
NPLC ≥ 100	60	160	140
NPLC = 1000	75	170	140

*RMS Noise

Range	Multiplier
0.1V	x20
1V	x2
10V	x1
100V	x2
1000V	x1

For RMS noise error, multiply RMS noise result from graph by multiplier in chart. For peak noise error, multiply RMS noise error by 3.

1 Additional error from Tcal or last ACAL ± 1°C .

2 Additional error from Tcal ± 5°C.

3 Specifications are for PRESET; NPLC 100.

4 For fixed range (> 4 min.), MATH NULL and Tcal ± 1°C.

5 Specifications for 90 day, 1 year and 2 year are within 24 hours and ± 1° C of last ACAL; Tcal ±5 °C; MATH NULL and fixed range.

ppm of Reading specifications for High Stability (Option 002) are in parentheses.

Without MATH NULL, add 0.15 ppm of Range to 10 V, 0.7 ppm of Range to 1 V, and 7ppm of Range to 0.1V. Without math null and for fixed range less than 4 minutes, add 0.25 ppm of Range to 10 V, 1.7 ppm of Range to 1 V and 17 ppm of Range to 0.1 V.

Add 2 ppm of reading additional error for factory traceability to US NIST. Traceability error is the absolute error relative to National Standards associated with the source of last external calibration.

6 Add 12 ppm X (Vin / 1000)[2] additional error for inputs > 100 V.

7 Applies for 1 kΩ unbalance in the LO lead and ± 0.1% of the line frequency currently set for LFREQ.

8 For line frequency ± 1%, ACNMR is 40 dB for NPLC ≥ 1, or 55 dB for NPLC ≥ 100. For line frequency ± 5%, ACNMR is 30 dB for NPLC ≥ 100.

Section 1: DC Voltage continued

Reading Rate (Auto-Zero Off)

Selected Reading Rates [1]

NPLC	Aperture	Digits	Bits	Readings / Sec	
				A-Zero Off	A-Zero On
0.0001	1.4 µs	4.5	16	100,000[3]	4,130
0.0006	10 µs	5.5	18	50,000	3,150
0.01	167 µs[2]	6.5	21	5,300	930
0.1	1.67 ms[2]	6.5	21	592	245
1	16.6 ms[2]	7.5	25	60	29.4
10	0.166 s[2]	8.5	28	6	3
100		8.5	28	36 / min	18 / min
1000		8.5	28	3.6 / min	1.8 / min

Maximum Input

	Rated Input	Non-Destructive
HI to LO	± 1000 V pk	± 1200 V pk
LO to Guard[4]	± 200 V pk	± 350 V pk
Guard to Earth[5]	± 500 V pk	± 1000 V pk

Input Terminals

Terminal Material: Gold-plated Tellurium Copper
Input Leakage Current: <20 pA at 25°C

Temperature Coefficient (Auto-Zero Off)

For a stable environment ± 1°C add the
following additional error for AZERO OFF

Range	Error
100 mV - 10 V	5 µV/°C
100 V - 1000 V	500 µV/°C

1   For PRESET;DELAY 0; DISP OFF; OFOR-
    MAT DINT; ARANGE OFF.

2   Aperture is selected independent of
    line frequency (LFREQ). These aper-
    tures are for 60 Hz NPLC values where
    1 NPLC = 1 / LFREQ. For 50 Hz and
    NPLC indicated, aperture will
    increase by 1.2 and reading rates will
    decrease by 0.833.

3   For OFORMAT SINT.

4   >10^{10} Ω LO to Guard with guard open.

5   >10^{12} Ω Guard to Earth.

Section 2: Resistance

Two-wire and Four-wire Ohms (OHM and OHMF Functions)

Range	Full Scale	Maximum Resolution	Current[4] Source	Test Voltage	Open Circuit	Maximum Lead Resistance (OHMF)	Maximum Series Offset (OCOMP ON)	Temperature Coefficient (ppm of Reading + ppm of Range) / °C	
								Without ACAL[5]	With ACAL[6]
10 Ω	12.00000	10 µΩ	10 mA	0.1 V	12 V	20 Ω	0.01 V	3 + 1	1 + 1
100 Ω	120.00000	10 µΩ	1 mA	0.1 V	12 V	200 Ω	0.01 V	3 + 1	1 + 1
1 kΩ	1.2000000	100 µΩ	1 mA	1.0 V	12 V	150 Ω	0.1 V	3 + 0.1	1 + 0.1
10 kΩ	12.000000	1 mΩ	100 µA	1.0 V	12 V	1.5 kΩ	0.1 V	3 + 0.1	1 + 0.1
100 kΩ	120.00000	10 mΩ	50 µA	5.0 V	12 V	1.5 kΩ	0.5 V	3 + 0.1	1 + 0.1
1 MΩ	1.2000000	100 mΩ	5 µA	5.0 V	12 V	1.5 kΩ		3 + 1	1 + 1
10 MΩ	12.000000	1 Ω	500 nA	5.0 V	12 V	1.5 kΩ		20 + 20	5 + 2
100 MΩ [7]	120.00000	10 Ω	500 nA	5.0 V	5 V	1.5 kΩ		100 + 20	25 + 2
1GΩ [7]	1.2000000	100 Ω	500 nA	5.0 V	5 V	1.5 kΩ		1000 + 20	250 + 2

4   Current source is ± 3% absolute
    accuracy.

5   Additional error from Tcal or last
    ACAL ± 1° C.

6   Additional error from Tcal ± 5° C.

7   Measurement is computed from
    10 M Ω in parallel with input.

Section 2: Resistance continued

Accuracy[1] (ppm of Reading + ppm of Range)

Range	24 Hour [2]	90 Day [3]	1 Year [3]	2 Year [3]
10 Ω	5 + 3	15 + 5	15 + 5	20 + 10
100 Ω	3 + 3	10 + 5	12 + 5	20 + 10
1 kΩ	2 + 0.2	8 + 0.5	10 + 0.5	15 + 1
10 kΩ	2 + 0.2	8 + 0.5	10 + 0.5	15 + 1
100 kΩ	2 + 0.2	8 + 0.5	10 + 0.5	15 + 1
1 MΩ	10 + 1	12 + 2	15 + 2	20 + 4
10 MΩ	50 + 5	50 + 10	50 + 10	75 + 10
100 MΩ	500 + 10	500 + 10	500 + 10	0.1% + 10
1 GΩ	0.5% + 10	0.5% + 10	0.5% + 10	1% + 10

1 Specifications are for PRESET; NPLC 100; OCOMP ON; OHMF.

2 Tcal ± 1°C.

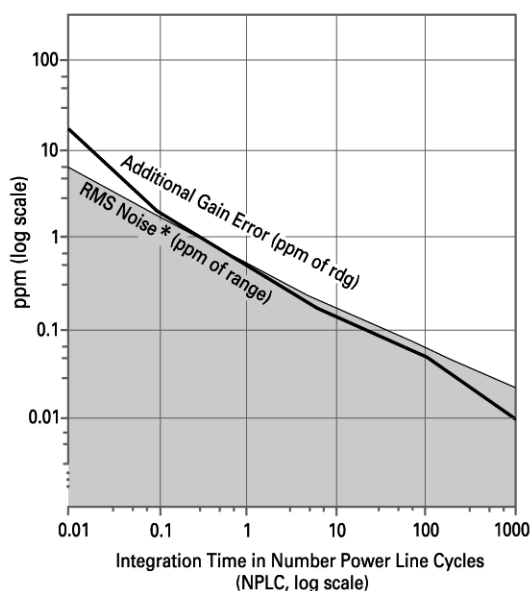3 Specifications for 90 day, 1 year, and 2 year are within 24 hours and ± 1°C of last ACAL; Tcal ± 5°C.

Add 3 ppm of reading additional error for factory traceability of 10 kΩ to US NIST. Traceability is the absolute error relative to National Standards associated with the source of last external calibration.

Two-Wire Ohms Accuracy

For Two-Wire Ohms (OHM) accuracy, add the following offset errors to the Four-Wire Ohms (OHMF) accuracy.
24 Hour: 50 mΩ. 90 Day: 150 mΩ. 1 Year: 250 mΩ. 2 Year: 500 mΩ

Additional Errors

ppm (log scale)

Additional Gain Error (ppm of rdg)

RMS Noise * (ppm of range)

Integration Time in Number Power Line Cycles
(NPLC, log scale)

*RMS Noise

Range	Multiplier
10 Ω & 100 Ω	x10
1k Ω to 100 kΩ	x1
1 MΩ	x1.5
10 MΩ	x2
100 MΩ	x120
1 GΩ	x1200

For RMS noise error, multiply RMS noise result from graph by multiplier in chart. For peak noise error, multiply RMS noise error by 3.

Settling Characteristics

For first reading error following range change, add the total 90 day measurement error for the current range. Preprogrammed settling delay times are for <200 pF external circuit capacitance.

Selected Reading Rates [4]

NPLC[5]	Aperture	Digits	Readings / Sec	
			Auto-Zero Off	Auto-Zero On
0.0001	1.4 µs	4.5	100,000 [7]	4,130
0.0006	10 µs	5.5	50,000	3,150
0.01	167 µs[6]	6.5	5,300	930
0.1	1.66 ms[6]	6.5	592	245
1	16.6 ms[6]	7.5	60	29.4
10	0.166 s[6]	7.5	6	3
100		7.5	36 / min	18 / min

Measurement Consideration

Keysight recommends the use of PTFE* cable or other high impedance, low dielectric absorption cable for these measurements.

Maximum Input

	Rated Input	Non-Destructive
HI to LO	± 1000 V pk	± 1000 V pk
HI & LO Sense to LO	± 200 V pk	± 350 V pk
LO to Guard	± 200 V pk	± 350 V pk
Guard to Earth	± 500 V pk	± 1000 V pk

Temperature Coefficient (Auto-Zero Off)

For a stable environment ± 1°C add the following error for AZERO OFF. (ppm of Range) / °C

Range	Error		Range	Error
10 Ω	50		1 MΩ	1
100 Ω	50		10 MΩ	1
1 kΩ	5		100 MΩ	10
10 kΩ	5		1 GΩ	100
100 kΩ	1			

4 For PRESET; DELAY 0; DISP OFF; OFORMAT DINT; ARANGE OFF.

For OHMF or OCOMP ON, the maximum reading rates will be slower.

5 Ohms measurements at rates < NPLC 1 are subject to potential noise pickup. Care must be taken to provide adequate shielding and guarding to maintain measurement accuracies.

6 Aperture is selected independent of line frequency (LFREQ). These apertures are for 60 Hz NPLC values where 1 NPLC = 1 / LFREQ. For 50 Hz and NPLC indicated, aperture will increase by 1.2 and reading rates will decrease by 0.833.

7 For OFORMAT SINT.

Section 3: DC Current

DC Current (DCI Function)

Range	Full Scale	Maximum Resolution	Shunt Resistance	Burden Voltage	Temperature Coefficient (ppm of Reading + ppm of Range) / °C	
					Without ACAL [1]	With ACAL [2]
100 nA	120.000	1 pA	545.2 kΩ	0.055 V	10 + 200	2 + 50
1 µA	1.200000	1 pA	45.2 kΩ	0.045 V	2 + 20	2 + 5
10 µA	12.000000	1 pA	5.2 kΩ	0.055 V	10 + 4	2 + 1
100 µA	120.00000	10 pA	730 Ω	0.075 V	10 + 3	2 + 1
1 mA	1.2000000	100 pA	100 Ω	0.100 V	10 + 2	2 + 1
10 mA	12.000000	1 nA	10 Ω	0.100 V	10 + 2	2 + 1
100 mA	120.00000	10 nA	1 Ω	0.250 V	25 + 2	2 + 1
1 A	1.0500000	100 nA	0.1 Ω	<1.5 V	25 + 3	2 + 2

Accuracy [3] (ppm Reading + ppm Range)

Range	24 Hour [4]	90 Day [5]	1 Year [5]	2 Year [5]
100 nA[6]	10 + 400	30 + 400	30 + 400	35 + 400
1 µA[6]	10 + 40	15 + 40	20 + 40	25 + 40
10 µA[6]	10 + 7	15 + 10	20 + 10	25 + 10
100 µA	10 + 6	15 + 8	20 + 8	25 + 8
1 mA	10 + 4	15 + 5	20 + 5	25 + 5
10 mA	10 + 4	15 + 5	20 + 5	25 + 5
100 mA	25 + 4	30 + 5	35 + 5	40 + 5
1 A	100 + 10	100 + 10	110 + 10	115 + 10

Settling Characteristics

For first reading or range change error, add .001% of input current step additional error. Reading settling times can be affected by source impedance and cable dielectric absorption characteristics.

Additional Errors

*RMS Noise * (ppm of range)*

Additional Gain Error (ppm of rdg)

ppm (log scale)

Integration Time in Number Power Line Cycles (NPLC, log scale)

*RMS Noise

Range	Multiplier
100 nA	x100
1 µA	x10
10 µA to 1 A	x1

For RMS noise error, multiply RMS noise result from graph by multiplier in chart. For peak noise error, multiply RMS noise error by 3.

Measurement Considerations

Keysight recommends the use of PTFE cable or other high impedance, low dielectric absorption cable for low current measurements. Current measurements at rates < NPLC 1 are subject to potential noise pickup. Care must be taken to provide adequate shielding and guarding to maintain measurement accuracies.

Selected Reading Rates [7]

NPLC	Aperture	Digits	Readings / Sec
0.0001	1.4 µs	4.5	2,300
0.0006	10 µs	5.5	1,350
0.01	167 µs [8]	6.5	157
0.1	1.67 ms [8]	6.5	108
1	16.6 ms [8]	7.5	26
10	0.166 s [8]	7.5	3
100		7.5	18 / min

Maximum Input

	Rated Input	Non-Destructive
I to LO	± 1.5 A pk	< 1.25 A rms
LO to Guard	± 200 V pk	± 350 V pk
Guard to Earth	± 500 V pk	± 1000 V pk

Section 4: AC Voltage

General Information

The Keysight 3458A supports three techniques for measuring true rms AC voltage, each offering unique capabilities. The desired measurement technique is selected through the SETACV command. The ACV functions will then apply the chosen method for subsequent measurements.

The following section provides a brief description of the three operation modes along with a summary table helpful in choosing the technique best suited to your specific measurement need.

SETACV SYNC   **Synchronously Sub-sampled Computed true rms technique.**

This technique provides excellent linearity and the most accurate measurement results. It does require that the input signal be repetitive (not random noise for example). The bandwidth in this mode is from 1 Hz to 10 MHz.

SETACV ANA   **Analog Computing true rms conversion technique.**

This is the measurement technique at power-up or following an instrument reset. This mode works well with any signal within its 10 Hz to 2 MHz bandwidth and provides the fastest measurement speeds.

SETACV RNDM   **Random Sampled Computed true rms technique.**

This technique again provides excellent linearity, however the overall accuracy is the lowest of the three modes. It does not require a repetitive input signal and is threfore well suited to wideband noise measurements. The bandwidth in this mode is from 20 Hz to 10 MHz.

Selection Table

Technique	Frequency Range	Best Accuracy	Repetitive Signal Required	Readings / Sec Minimum	Maximum
Synchronous Sub-sampled	1 Hz - 10 MHz	0.010%	Yes	0.025	10
Analog	10 Hz - 2 MHz	0.03%	No	0.8	50
Random Sampled	20 Hz - 10 MHz	0.1%	No	0.025	45

Synchronous Sub-sampled Mode (ACV Function, SETACV SYNC)

Range	Full Scale	Maximum Resolution	Input Impedance	Temperature Coefficient[1] (% of Reading + % of Range) / °C
10 mV	12.00000	10 nV	1 MΩ ± 15% with <140pF	0.002 + 0.02
100 mV	120.00000	10 nV	1 MΩ ± 15% with <140pF	0.001 + 0.0001
1 V	1.2000000	100 nV	1 MΩ ± 15% with <140pF	0.001 + 0.0001
10 V	12.000000	1 µV	1 MΩ ± 2% with <140pF	0.001 + 0.0001
100 V	120.00000	10 µV	1 MΩ ± 2% with <140pF	0.001 + 0.0001
1000 V	700.0000	100 µV	1 MΩ ± 2% with <140pF	0.001 + 0.0001

AC Accuracy [2]
24 Hour to 2 Year (% of Reading + % of Range)

Range	ACBAND ≤ 2MHz 1 Hz to[3] 40 Hz	40 Hz to[3] 1 kHz	1 kHz to[3] 20 kHz	20 kHz to[3] 50 kHz	50 kHz to 100 kHz	100 kHz to 300 kHz	300 kHz to 1 MHz	1 MHz to 2 MHz
10 mV	0.03 + 0.03	0.02 + 0.011	0.03 + 0.011	0.1 + 0.011	0.5 + 0.011	4.0 + 0.02		
100 mV - 10 V	0.007 + 0.004	0.007 + 0.002	0.014 + 0.002	0.03 + 0.002	0.08 + 0.002	0.3 + 0.01	1 + 0.01	1.5 + 0.01
100 V	0.02 + 0.004	0.02 + 0.002	0.02 + 0.002	0.035 + 0.002	0.12 + 0.002	0.4 + 0.01	1.5 + 0.01	
1000 V	0.04+ 0.004	0.04 + 0.002	0.06 + 0.002	0.12 + 0.002	0.3 + 0.002			

1   Additional error beyond ± 1°C, but within + 5°C of last ACAL.

For ACBAND > 2MHz, use 10 mV range temperature coefficient for all ranges.

2   Specifications apply full scale to 10% of full scale, DC < 10% of AC, sine wave input, crest factor = 1.4, and PRESET. Within 24 hours and ± 1° C of last ACAL. Lo to Guard Switch on..

Peak (AC + DC) input limited to 5 x full scale for all ranges in ACV function.

Add 2 ppm of reading additional error for factory traceability of 10 V DC to US NIST.

3   LFILTER ON recommended.

Section 4: AC Voltage continued

AC Accuracy continued: 24 Hour to 2 Year (% of Reading + % of Range)

| Range | ACBAND >2 MHz | | | | |
	45 Hz to 100 kHz	100 kHz to 1 MHz	1 MHz to 4 MHz	4 MHz to 8 MHz	8 MHz to 10 MHz
10 mV	0.09 + 0.06	1.2 + 0.05	7 + 0.07	20 +0.08	
100 mV - 10 V	0.09 + 0.06	2.0 + 0.05	4 + 0.07	4 + 0.08	15 + 0.1
100 V	0.12 + 0.002				
1000 V	0.3 + 0.01				

Transfer Accuracy

Range	% of Reading
100 mV - 100 V	(0.002 + Resolution in %)[1]

Conditions
- Following 4 Hour warm-up
- Within 10 min and ±0.5°C of the reference measurement
- 45 Hz to 20 kHz, sine wave input
- Within ±10% of the reference voltage and frequency

[1]   Resolution in % is the value of RES command or parameter (reading resolution as percentage of measurement range).

[2]   Additional error beyond ± 1°C, but within ± 5°C of last ACAL. (% of Range) / °C. For ACBAND >2MHz,use 10mV range temperature coefficient. Lo to Guard switch on.

AC + DC Accuracy (ACDCV Function)

For ACDCV Accuracy apply the following additional error to the ACV accuracy. (% of Range)

DC <10% of AC Voltage

Range	ACBAND ≤ 2MHz	ACBAND > 2MHz	Temperature Coefficient [2]
10 mV	0.09	0.09	0.03
100 mV - 1000 V	0.008	0.09	0.0025

DC >10% of AC Voltage

Range	ACBAND ≤ 2MHz	ACBAND > 2MHz	Temperature Coefficient [2]
10 mV	0.7	0.7	0.18
100 mV - 1000 V	0.07	0.7	0.025

Additional Errors

Apply the following additional errors as appropriate to your particular measurement setup. (% of Reading)

[3]   Flatness error including instrument loading.

| Source R | Input Frequency [3] | | | |
	0 - 1 MHz	1 - 4 MHz	4 - 8 MHz	8 - 10 MHz
0 Ω	0	2	5	5
50 Ω Terminated	0.003	0	0	0
75 Ω Terminated	0.004	2	5	5
50 Ω	0.005	3	7	10

Crest Factor	Resolution Multiplier [1]
1 - 2	(Resolution in %) x 1
2 - 3	(Resolution in %) x 2
3 - 4	(Resolution in %) x 3
4 - 5	(Resolution in %) x 5

Reading Rates [4]

[4]   Reading time is the sum of the Sec / Reading shown for your configuration. The tables will yield the slowest reading rate for your configuration. Actual reading rates may be faster. For DELAY-1; ARANGE OFF.

ACBAND Low	Maximum Sec / Reading
1 - 5 Hz	6.5
5 - 20 Hz	2.0
20 - 100 Hz	1.2
100 - 500 Hz	0.32
> 500 Hz	0.02

% Resolution	Maximum Sec / Reading
0.001 - 0.005	32
0.005 - 0.01	6.5
0.01 - 0.05	3.2
0.05 - 0.1	0.64
0.1 - 1	0.32
>1	0.1

Settling Characteristics
There is no instrument settling required.

Common Mode Rejection
For 1 kΩ imbalance in LO lead, > 90 dB, DC to 60 Hz.

High Frequency Temperature Coefficient

For outside Tcal ±5°C add the following error.
(% of Reading) / °C

| | Frequency | |
Range	2 - 4 MHz	4 - 10 MHz
10 mV - 1 V	0.02	0.08
10 V - 1000 V	0.08	0.08

Maximum Input

	Rated Input	Non-Destructive
HI to LO	± 1000 V pk	± 1200 V pk
LO to Guard	± 200 V pk	± 350 V pk
Guard to Earth	± 500 V pk	± 1000 V pk
Volt - Hz Product	1×10^8	

Analog Mode (ACV Function, SETACV ANA)

Range	Full Scale	Maximum Resolution	Input Impedance	Temperature Coefficient [1] (% of Reading+ % of Range) / °C
10 mV	12.00000	10 nV	1 MΩ ± 15% with < 140pF	0.003 + 0.006
100 mV	120.0000	100 nV	1 MΩ ± 15% with < 140pF	0.002 + 0.0
1 V	1.200000	1 µV	1 MΩ ± 15% with < 140pF	0.002 + 0.0
10 V	12.00000	10 µV	1 MΩ ± 2% with < 140pF	0.002 + 0.0
100 V	120.0000	100 µV	1 MΩ ± 2% with < 140pF	0.002 + 0.0
1000 V	700.000	1 mV	1 MΩ ± 2% with < 140pF	0.002 + 0.0

1   Additional error beyond ± 1°C, but within ± 5°C of last ACAL.

2   Specifications apply full scale to 1/20 full scale, sinewave input, crest factor = 1.4, and PRESET. Within 24 hours and ± 1°C of last ACAL. Lo to Guard switch on.

Maximum DC is limited to 400V in ACV function.

Add 2 ppm of reading additional error for factory traceability of 10V DC to US NIST.

AC Accuracy [2]
24 Hour to 2 Year (% Reading + % Range)

Range	10 Hz to 20 Hz	20 Hz to 40 Hz	40 Hz to 100 Hz	100 Hz to 20 kHz	20 kHz to 50 kHz	50 kHz to 100 kHz	100 kHz to 250 kHz	250 kHz to 500 kHz	500 kHz to 1 MHz	1 MHz to 2 MHz
10 mV	0.4 + 0.32	0.15 + 0.25	0.06 + 0.25	0.02 + 0.25	0.15 + 0.25	0.7 + 0.35	4 + 0.7			
100 mV - 10 V	0.4 + 0.02	0.15 + 0.02	0.06 + 0.01	0.02 + 0.01	0.15 + 0.04	0.6 + 0.08	2 + 0.5	3 + 0.6	5 + 2	10 + 5
100 V	0.4 + 0.02	0.15 + 0.02	0.06 + 0.01	0.03 + 0.01	0.15 + 0.04	0.6 + 0.08	2 + 0.5	3 + 0.6	5 + 2	
1000 V	0.42 + 0.03	0.17 + 0.03	0.08 + 0.02	0.06 + 0.02	0.15 + 0.04	0.6 + 0.2				

AC + DC Accuracy (ACDCV Function)
For ACDCV Accuracy apply the following additional error to the ACV accuracy. (% of Reading + % of Range)

| | DC < 10% of AC Voltage | | DC > 10% of AC Voltage | |
Range	Accuracy	Temperature Coefficient [3]	Accuracy	Temperature Coefficient [3]
10 mV	0.0 + 0.2	0 + 0.015	0.15 + 3	0 + 0.06
100 mV-1000 V	0.0 + 0.02	0 + 0.001	0.15 + 0.25	0 + 0.007

3   Additional error beyond ± 1° C, but within ± 5°C of last ACAL. (% of Reading + % of Range) / °C.

Additional Errors

Apply the following additional errors as appropriate to your particular measurement setup.

Low Frequency Error (% of Reading)

| | ACBAND Low | | |
Signal Frequency	10 Hz - 1 kHz NPLC >10	1 - 10 kHz NPLC >1	> 10 kHz NPLC > 0.1
10 - 200 Hz	0		
200 - 500 Hz	0	0.15	
500 - 1 kHz	0	0.015	0.9
1 - 2 kHz	0	0	0.2
2 - 5 kHz	0	0	0.05
5 - 10 kHz	0	0	0.01

Crest Factor Error (% of Reading)

Crest Factor	Additional Error
1 - 2	0
2 - 3	0.15
3 - 4	0.25
4 - 5	0.40

Section 4: AC Voltage continued

Reading Rates [1]

ACBAND Low	NPLC	Sec / Reading	
		ACV	ACDCV
≥ 10 Hz	10	1.2	1
≥ 1 kHz	1	1	0.1
≥ 10 kHz	0.1	1	0.02

Settling Characteristics

For first reading or range change error using default delays, add .01% of input step additional error.
The following data applies for DELAY 0.

Function	ACBAND Low	DC Component	Settling Time
ACV	≥ 10Hz	DC < 10% AC	0.5 sec to 0.01%
		DC > 10% AC	0.9 sec to 0.01%
ACDCV	10 Hz-1 kHz		0.5 sec to 0.01%
	1 kHz - 10 kHz		0.08 sec to 0.01%
	≥ 10 kHz		0.015 sec to 0.01%

Maximum Input

	Rated Input	Non-Destructive
HI to LO	± 1000 V pk	± 1200 V pk
LO to Guard	± 200 V pk	± 350 V pk
Guard to Earth	± 500 V pk	± 1000 V pk
Volt - Hz Product	1×10^8	

Common Mode Rejection

For 1 kΩ imbalance in LO lead, > 90 dB, DC - 60 Hz.

Random Sampled Mode (ACV Function, SETACV RNDM)

Range	Full Scale	Maximum Resolution	Input Impedance	Temperature Coefficient [2] (% of Reading + % of Range) / °C
10 mV	12.000	1 µV	1 MΩ ± 15% with < 140pF	0.002 + 0.02
100 mV	120.00	10 µV	1 MΩ ± 15% with < 140pF	0.001+ 0.0001
1 V	1.2000	100 µV	1 MΩ ± 15% with < 140pF	0.001+ 0.0001
10 V	12.000	1 mV	1 MΩ ± 2% with < 140pF	0.001+ 0.0001
100 V	120.00	10 mV	1 MΩ ± 2% with < 140pF	0.001+ 0.0001
1000 V	700.0	100 mV	1 MΩ ± 2% with < 140pF	0.001+ 0.0001

AC Accuracy [3]

24 Hour to 2 Year (% of Reading + % of Range)

	ACBAND ≤ 2 MHz				ACBAND > 2 MHz				
Range	20 Hz to 100 kHz	100 kHz to 300 kHz	300 kHz to 1 MHz	1 MHz to 2 MHz	20 Hz to 100 kHz	100 kHz to 1 MHz	1 MHz to 4 MHz	4 MHz to 8 MHz	8 MHz to 10 MHz
10 mV	0.5+0.02	4+0.02			0.1+0.05	1.2+0.05	7+0.07	20+0.08	
100 mV–10 V	0.08+0.002	0.3+0.01	1+0.01	1.5+0.01	0.1+0.05	2+0.05	4+0.07	4+0.08	15+0.1
100 V	0.12+0.002	0.4+0.01	1.5+0.01		0.12+0.002				
1000 V	0.3+0.01				0.3+0.01				

AC + DCV Accuracy (ACDCV Function)

For ACDCV Accuracy apply the following additional error to the ACV accuracy. (% of Range).

	DC ≤ 10% of AC Voltage			DC >10% of AC Voltage		
Range	ACBAND ≤ 2 MHz	ACBAND > 2 MHz	Temperature Coefficient [1]	ACBAND ≤ 2 MHz	ACBAND > 2 MHz	Temperature Coefficient [1]
10 mV	0.09	0.09	0.03	0.7	0.7	0.18
100 mV - 1 kV	0.008	0.09	0.0025	0.07	0.7	0.025

Additional Errors

Apply the following additional errors as appropriate to your particular measurement setup. (% of Reading)

	Input Frequency [2]			
Source R	0 - 1 MHz	1 - 4 MHz	4 - 8 MHz	8 - 10 MHz
0 Ω	0	2	5	5
50 Ω Terminated	0.003	0	0	0
75 Ω Terminated	0.004	2	5	5
50 Ω	0.005	3	7	10

Crest Factor	Resolution Multiplier
1 - 2	(Resolution in %) x 1
2 - 3	(Resolution in %) x 3
3 - 4	(Resolution in %) x 5
4 - 5	(Resolution in %) x 8

Reading Rates [3]

	Sec / Reading	
% Resolution	ACV	ACDCV
0.1 - 0.2	40	39
0.2 - 0.4	11	9.6
0.4 - 0.6	2.7	2.4
0.6 - 1	1.4	1.1
1 - 2	0.8	0.5
2 - 5	0.4	0.1
>5	0.32	0.022

High Frequency Temperature Coefficient

For outside Tcal ± 5°C add the following error. (% of Reading) / °C

Range	2 - 4 MHz	4 - 10 MHz
10 mV - 1 V	0.02	0.08
10 V - 1000 V	0.08	0.08

Settling Characteristics

For first reading or range change error using default delays, add 0.01% of input step additional error.
The following data applies for DELAY 0.

Function	DC Component	Settling Time
ACV	DC < 10% of AC	0.5 sec to 0.01%
	DC > 10% of AC	0.9 sec to 0.01%
ACDCV	No instrument settling required.	

Common Mode Rejection

For 1 kΩ imbalance in LO lead, > 90 dB, DC to 60 Hz.

Maximum Input

	Rated Input	Non-Destructive
HI to LO	± 1000 V pk	± 1200 V pk
LO to Guard	± 200 V pk	± 350 V pk
Guard to Earth	± 500 V pk	± 1000 V pk
Volt - Hz Product	1 x 10^8	

1 Additional error beyond ± 1°C, but within ± 5°C of last ACAL. (% of Reading) / °C.

For ACBAND > 2MHz, use 10mV range temperature coefficient for all ranges.

2 Flatness error including instrument loading.

3 For DELAY -1; ARANGE OFF. For DELAY 0 in ACV, the reading rates are identical to ACDCV.

Section 5: AC Current

AC Current (ACI and ACDCI Functions)

Range	Full Scale	Maximum Resolution	Shunt Resistance	Burden Voltage	Temperature Coefficient[1] (% of Reading + % of Range) / °C
100 µA	120.0000	100 pA	730 Ω	0.1 V	0.002 + 0
1 mA	1.200000	1 nA	100 Ω	0.1 V	0.002 + 0
10 mA	12.00000	10 nA	10 Ω	0.1 V	0.002 + 0
100 mA	120.0000	100 nA	1 Ω	0.25 V	0.002 + 0
1 A	1.050000	1 µA	0.1 Ω	< 1.5 V	0.002 + 0

AC Accuracy [2]
24 Hour to 2 Year (% Reading + % Range)

Range	10 Hz to 20 Hz	20 Hz to 45 Hz	45 Hz to 100 Hz	100 Hz to 5kHz	5 kHz to 20 kHz [3]	20 kHz to 50 kHz [3]	50 kHz to 100 kHz [3]
100 µA[4]	0.4+0.03	0.15+0.03	0.06+0.03	0.06 +0.03			
1 mA - 100 mA	0.4+0.02	0.15+0.02	0.06+0.02	0.03+0.02	0.06+0.02	0.4 +0.04	0.55+0.15
1 A	0.4+0.02	0.16+0.02	0.08+0.02	0.1+0.02	0.3 +0.02	1 + 0.04	

AC + DC Accuracy (ACDCI Function)
For ACDCI Accuracy apply the following additional error to the ACI accuracy.
(% of Reading + % of Range).

DC≤ 10% of AC Accuracy	Temperature Coefficient [5]	DC > 10% of AC Accuracy	Temperature Coefficient [5]
0.005 + 0.02	0.0 + .001	0.15 + 0.25	0.0 + 0.007

Additional Errors
Apply the following additional errors as appropriate to your particular measurement setup.

Low Frequency Error (% of Reading)

Signal Frequency	ACBAND Low		
	10 Hz - 1 kHz NPLC >10	1 - 10 kHz NPLC >1	> 10 kHz NPLC >0.1
10 - 200Hz	0		
200 - 500 Hz	0	0.15	
500 - 1 kHz	0	0.015	0.9
1 - 2 kHz	0	0	0.2
2 - 5 kHz	0	0	0.05
5 - 10 kHz	0	0	0.01

Crest Factor Error (% of Reading)

Crest Factor	Additional Error
1 - 2	0
2 - 3	0.15
3 - 4	0.25
4 - 5	0.40

Reading Rates [6]

ACBAND Low	NPLC	Maximum Sec / Reading ACI	ACDCI
≥ 10 Hz	10	1.2	1
≥ 1 kHz	1	1	0.1
≥ 10 kHz	0.1	1	0.02

Settling Characteristics

For first reading or range change error using default delays, add .01% of input step additional error for the
100 µA to 100 mA ranges. For the 1 A range add .05% of input step additional error.
The following data applies for DELAY 0.

Function	ACBAND Low	DC Component	Settling Time
ACI	≥10 Hz	DC < 10% AC	0.5 sec to 0.01%
		DC > 10% AC	0.9 sec to 0.01%
ACDCI	10 Hz-1 kHz		0.5 sec to 0.01%
	1 kHz - 10 kHz		0.08 sec to 0.01%
	≥ 10 kHz		0.015 sec to 0.01%

Maximum Input

	Rated Input	Non-Destructive
I to LO	± 1.5 A pk	< 1.25 A rms
LO to Guard	± 200 V pk	± 350 V pk
Guard to Earth	± 500 V pk	± 1000 V pk

Section 6: Frequency/Period

Frequency / Period Characteristics

	Voltage (AC or DC Coupled) ACV or ACDCV Functions [1]	Current (AC or DC Coupled) ACI or ACDCI Functions [1]
Frequency Range	1 Hz – 10 MHz	1 Hz – 100 kHz
Period Range	1 sec – 100 ns	1 sec – 10 µs
Input Signal Range	700 V rms – 1 mV rms	1 A rms – 10 µA rms
Input Impedance	1 MΩ ± 15% with < 140 pF	0.1 – 730 Ω [2]

Accuracy

Range	24 Hour – 2 Year 0°C – 55°C
1 Hz – 40 Hz 1 s – 25 ms	0.05 % of Reading
40 Hz – 10 MHz 25 ms – 100 ns	0.01 % of Reading

Reading Rates

Resolution	Gate Time [3]	Readings/Sec [4]
0.00001%	1 s	0.95
> 0.0001%	100 ms	9.6
> 0.001%	10 ms	73
> 0.01%	1 ms	215
> 0.1%	100 µs	270

Measurement Technique:
Reciprocal Counting

Time Base:
10 MHz ± 0.01%, 0°C to 55°C

Level Trigger:
± 500% of Range in 5% steps

Trigger Filter:
Selectable 75 kHz Low Pass Trigger Filter

Slope Trigger:
Positive or Negative

1 The source of frequency measurements
and the measurement input coupling are
determined by the FSOURCE command.

2 Range dependent, see ACI for specific
range impedance values.

3 Gate Time is determined by the specified
measurement resolution.

4 For Maximum Input specified to fixed
range operation. For auto range, the
maximum speed is 30 readings/sec for
ACBAND ≥ 1 kHz.

Actual Reading Speed is the longer of 1
period of the input, the chosen gate time,
or the default reading time-out of 1.2 sec.

Section 7: Digitizing

General Information

The Keysight 3458A supports three independent methods for signal digitizing. Each mehtod is discussed below to aid in selecting the appropriate setup best suited to your specific application.

DCV   **Standard DCV function.**

This mode of digitizing allows signal acquisition at rates from 0.2 readings/sec at 28 bits resolution to 100 k readings/sec at 16 bits. Arbitrary sample apertures from 500 ns to 1 sec are selectable with 100 ns resolution. Input voltage ranges cover 100 mV to 1000 V full scale. Input bandwidth varies from 30 kHz to 150 kHz depending on the measurement range.

DSDC   **Direct Sampling DC Coupled measurement technique.**
DSAC   **Direct Sampling AC Coupled measurement technique.**

In these modes the input is sampled through a track/hold with a fixed 2 ns aperture which yields a 16 bit resolution result. The sample rate is selectable from 6000 sec/sample to 20 µs/sample with 100 ns resolution. Input voltage ranges cover 10 mV peak to 1000 V peak full scale. The input bandwidth is limited to 12 MHz.

SSDC   **Sub-Sampling (Effective time sampling) DC Coupled.**
SSAC   **Sub-Sampling (Effective time sampling) AC Coupled.**

These techniques implement synchronous sub-sampling of a repetitive input signal through a track/hold with a 2 ns sample aperture which yields a 16 bit resolution result. The effective sample rate is settable from 6000 sec/sample to 10 ns/sample with 10 ns resolution. Sampled data can be time ordered by the instrument and output to the GPIB. Input voltage ranges cover 10 mV peak to 1000 V peak full scale. The input bandwidth is limited to 12 MHz.

Summary of Digitizing Capabilities

Technique	Function	Input Bandwidth	Best Accuracy	Sample Rate
Standard	DCV	DC - 150 kHz	0.00005 - 0.01%	100 k / sec
Direct-sampled	DSDC / DSAC	DC - 12 MHz	0.02%	50 k / sec
Sub-sampled	SSDC / SSAC	DC - 12 MHz	0.02%	100 M / sec (effective)

Standard DC Volts Digitizing (DCV Function)

Range	Input Impedance	Offset Voltage [1]	Typical Bandwidth	Settling Time to 0.01% of Step
100 mV	>10^{10} Ω	< 5 µV	80 kHz	50 µs
1 V	>10^{10} Ω	< 5 µV	150 kHz	20 µs
10 V	>10^{10} Ω	< 5 µV	150 kHz	20 µs
100 V	10 MΩ	< 500 µV	30 kHz	200 µs
1000 V	10 MΩ	< 500 µV	30 kHz	200 µs

[1] ±1°C of an AZERO or within 24 hours and ± 1°C of last ACAL.

DC Performance
0.005 % of Reading + Offset[1]

Maximum Sample Rate (See DCV for more data.)

Readings / sec	Resolution	Aperture
100 k	15 bits	0.8 µs
100 k	16 bits	1.4 µs
50 k	18 bits	6.0 µs

Sample Timebase
Accuracy: 0.01 %
Jitter: < 100 ps rms

[2] < 125 ns variability between multiple 3458As.

External Trigger
Latency: < 175 ns [2]
Jitter: < 50 ns rms

Level Trigger
Latency: < 700 ns
Jitter: < 50 ns rms

Dynamic Performance
100 mV, 1 V, 10 V Ranges; Aperture = 6 μs

Test	Input (2 x full scale pk-pk)	Result
DFT-harmonics	1 kHz	< -96 dB
DFT-spurious	1 kHz	< -100 dB
Differential non-linearity	dc	< 0.003% of Range
Signal to Noise Ratio	1 kHz	> 96 dB

Direct and Sub-sampled Digitizing (DSDC, DSAC, SSDC and SSAC Functions)

Range [1]	Input Impedance	Offset Voltage [2]	Typical Bandwidth
10 mV	1 MΩ with 140 pF	< 50 μV	2 MHz
100 mV	1 MΩ with 140 pF	< 90 μV	12 MHz
1 V	1 MΩ with 140 pF	< 800 μV	12 MHz
10 V	1 MΩ with 140 pF	< 8 mV	12 MHz
100 V	1 MΩ with 140 pF	< 80 mV	12 MHz [3]
1000 V	1 MΩ with 140 pF	< 800 mV	2 MHz [3]

1   *Maximum DC voltage limited to 400 V DC in DSAC or SSAC functions.*

2   *±1°C and within 24 hours of last ACAL ACV.*

3   *Limited to 1 x 10 8 V-Hz product.*

DC to 20 kHz Performance
0.02 % of Reading + Offset [2]

Maximum Sample Rate

Function	Readings / sec	Resolution
SSDC, SSAC	100 M (effective) [4]	16 bits
DSDC, DSAC	50 k	16 bits

Dynamic Performance
100 mV, 1 V, 10 V Ranges; 50,000 Samples/sec

Test	Input (2 x full scale pk-pk)	Result
DFT-harmonics	20 kHz	< - 90 dB
DFT-harmonics	1.005 MHz	< - 60 dB
DFT-spurious	20 kHz	< - 90 dB
Differential non-linearity	20 kHz	< 0.005 % of Range
Signal to Noise Ratio	20 kHz	> 66 dB

Sample Timebase
Accuracy: 0.01 %
Jitter: < 100 ps rms

External Trigger
Latency: < 125 ns [5]
Jitter: < 2 ns rms

Level Trigger
Latency: < 700 ns
Jitter: < 100 ps, for 1 MHz full scale input

4   *Effective sample rate is determined by the smallest time increment used during synchronous sub-sampling of the repetitive input signal, which is 10 ns.*

5   *< 25 ns variability between multiple 3458As.*

Section 8: System Specifications

Function-Range-Measurement

The time required to program via GPIB a new measurement configuration, trigger a reading, and return the result to a controller with the following instrument setup: PRESET FAST; DELAY 0; AZERO ON; OFORMAT SINT; INBUF ON; NPLC 0.

TO - FROM Configuration Description	GPIB Rate [1]	Subprogram Rate
DCV ≤ 10 V to DCV ≤ 10 V	180 / sec	340 / sec
any DCV / OHMS to any DCV / OHMS	85 / sec	110 / sec
any DCV / OHMS to any DCV / OHMS with DEFEAT ON	150 / sec	270 / sec
TO or FROM any DCI	70 / sec	90 / sec
TO or FROM any ACV or ACI	75 / sec	90 / sec

1 *Using HP 9000 Series 350.*

2 *SINT data is valid for APER ≤10.8 μs.*

Selected Operating Rates[2]

	Rate
DCV Autorange Rate (100 mV to 10 V)	110 / sec
Execute simple command changes (CALL, OCOMP, etc.)	330 / sec
Readings to GPIB, ASCII	630 / sec
Readings to GPIB, DREAL	1000 / sec
Readings to GPIB, DINT	50,000 / sec
Readings to internal memory, DINT	50,000 / sec
Readings from internal memory to GPIB, DINT	50,000 / sec
Readings to GPIB, SINT	100,000 / sec
Readings to internal memory, SINT	100,000 / sec
Readings from internal memory to GPIB, SINT	100,000 / sec
Maximum internal trigger reading rate	100,000 / sec
Maximum external trigger reading rate	100,000 / sec

Memory

	Standard		Option 001	
	Readings	Bytes	Readings	Bytes
Reading Storage (16 bit)	10,240	20 k	+65,536	+128 k
Non-volatile, for subprograms and / or state storage	14 k			

Delay Time

Accuracy	±0.01% ± 5 ns
Maximum	6000 s
Resolution	10 ns
Jitter	50 ns pk-pk

Timer

Accuracy	±0.01% ± 5 ns
Maximum	6000 s
Resolution	100 ns
Jitter	<100 ps rms

Section 9: Ratio

Type of Ratio [1]

DCV / DCV	Ratio = (Input) / (Reference)
ACV / DCV	Reference: (HI Sense to LO) - (LO Sense to LO)
ACDCV / DCV	Reference Signal Range: ±12 V DC (autorange only)

Accuracy

± (Input error + Reference Error)
Input error = 1 x Total Error for input signal measurement function (DCV, ACV, ACDCV)
Reference error = 1.5 x Total error for the range of the reference DC input

Section 10: Math Functions

General Math Function Specifications

Math is executable as either a real-time or post processed operation.

Math function specifications do not include the error in X (the instrument reading) or errors in user entered values. The range of values input or output is + 1.0 x 10^{-37} to + 1.0 x 10^{37}. Out of range values indicate OVLD in the display and 1 x 10^{38} to GPIB. The minimum execution time is the time required to complete one math operation <u>after</u> each reading has completed.

NULL:
    X-OFFSET
    Minimum Execution Time = 180 µs

SCALE:
    (X-OFFSET) / SCALE
    Minimum Execution Time = 500 µs

PERC:
    100 x (X-PERC) / PERC
    Minimum Execution Time = 600 µs

PFAIL:
    Based on MIN, MAX registers
    Minimum Execution Time = 160 µs

dB:
    20 x Log (X/REF)
    Minimum Execution Time = 3.9 ms

dBm:
    10 x Log [(X^2 / RES) / 1mW]
    Minimum Execution Time = 3.9 ms

RMS:
    1-pole digital filter
    Computed rms of inputs.
    Minimum Execution Time = 2.7 ms

FILTER:
    1-pole digital filter
    Weighted Average of inputs
    Minimum Execution Time= 750 µs

STAT:
    MEAN, SDEV computed for sample
    population (N-1).
    NSAMP, UPPER, LOWER accumulated.
    Minimum Execution Time = 900 µs

CTHRM (FTHRM):
    °C (°F) temperature conversion for
    5 kΩ thermistor (40653B).
    Minimum Execution Time = 160 µs

CTHRM2K (FTHRM2K):
    °C (°F) temperature conversion for
    2.2 kΩ thermistor (40653A).
    Minimum Execution Time = 160 µs

CTHRM10K (FTHRM10K):
    °C (°F) temperature conversion for
    10 kΩ thermistor (40653C).
    Minimum Execution Time = 160 µs

CRTD85 (FRTD85):
    °C (°F) temperature conversion for
    RTD of 100 Ω, Alpha = 0.00385
    (40654A or 40654B).
    Minimum Execution Time = 160 µs

CRTD92 (FRTD92):
    °C (°F) temperature conversion for
    RTD of 100 Ω, Alpha = 0.003916
    Minimum Execution Time = 160 µs

Section 11: General Specifications

Operating environment
   0 to 55 °C

Operating humidity range
   Up to 95% RH at 40 °C

Physical characteristics
   88.9 mm H x 425.5 mm W x 502.9 mm D
   Net weight: 12 kg (26.5 lbs)
   Shipping weight: 14.8 kg (32.5 lbs)

IEEE-4888 interface
Complies with the following:
   IEEE-488.1 Interface Standard
   IEEE-728 Codes/Formats Standard
   HPML (Multimeter Language)

Storage temperature
   –40 to +75 °C

Warm-up time
   4 hours to published specifications

Power requirements
   100/120 V, 220/240 V ± 10%
   48-66 Hz, 360-420 Hz automatically
   sensed
   < 30 W, < 80 VA (peak)
   Fused: 1.5 @ 115 V or 0.5 A @ 230 V

Designed in accordance with
   Safety: IEC 348, UL 1244, CSA
   7n: Classified under
   MIL-T-28800D as Type III,
   Class 5, Style E, and Color R.

Warranty period
   One year

Input terminals
   Gold-plated tellurium copper

Included with 3458A
   34137A Test lead set for 3458A
   calibration certificate

Section 12: Ordering Information

Keysight 3458A multimeter

(with GPIB, 20 k bytes reading memory, and 8 ppm stability)

3458A-001	Extended reading memory (Expands total to 148 k bytes)
3458A-002	High stability (4 ppm/year) reference
3458A-A6J	ANSI Z540 compliant calibration
3458A-907	Front handles kit (P/N 5063-9226)
3458A-908	Rack mount kit (P/N 5063-9212)
3458A-909	Rack mount kit with handles (P/N 5063-9219)
3458A-ABD	German manual
3458A-ABF	French manual
3458A-ABJ	Japanese manual
3458A-ABZ	Italian manual

Kelvin probe and clip set
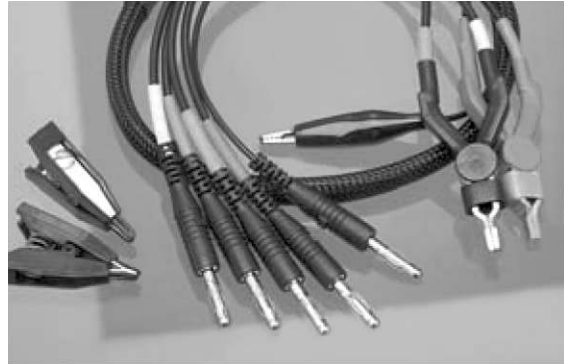
Accessories

10833A	GPIB cable (1 m)
10833B	GPIB cable (2 m)
10833C	GPIB cable (4 m)
10833D	GPIB cable (0.5 m)
11059A	Kelvin probe set (4-wires, 1 m)
11060A	Surface mount device (SMD) test probes
11062A	Kelvin clip set (2 each)
34137A	Deluxe test lead set for the 3458A
34308A	Thermistor kit
34330A	30 A current shunt
E2308A	Thermistor temperature probe

myKeysight

www.keysight.com/find/mykeysight
A personalized view into the information most relevant to you.

www.axiestandard.org
AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Keysight is a founding member of the AXIe consortium.

www.lxistandard.org
LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.

www.pxisa.org
PCI eXtensions for Instrumentation (PXI) modular instrumentation delivers a rugged, PC-based high-performance measurement and automation system.

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty
Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

Keysight Assurance Plans

www.keysight.com/find/AssurancePlans
Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

www.keysight.com/quality
Keysight Electronic Measurement Group
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners
www.keysight.com/find/channelpartners
Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/multimeters

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas
Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific
Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East
Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
(BP-05-29-14)

KEYSIGHT
TECHNOLOGIES