

SINCE 1976











標檢局 ISO-9001/CNS 12681

CVQ-不銹鋼耐蝕用

不銹鋼污水用

不銹鋼污水用

cva

Stainless Volute Pump SQ

Stainless Sump Pump SSQ

Stainless Sewage Pump KHQ

Stainless Sump Pump



CVQ 1/2HP~15HP SCS 13.14(#304.316)


WFOU CHEMICAL PUMP

不銹鋼耐蝕用~SCS 13(#304)·SCS 14(#316)

- Submersible Stainless Chemical Pump~SCS 13(#304)
- · Centrifugal Stainless Chemical Pump~SC\$ 13,14(#304,316)
 - Mechanical Seal--Teflon & Viton



SSQ 1HP~5HP SCS 13(#304)



SQ 1/2HP~1HP

SCS 13(#304)

不銹鋼一耐蝕用 •

CVQ-Centrifugal stainless volute pump ~SCS 13,14 (#304,316)

CVQ


FEATURES:

- Extra long life design, since the pump body and all related parts are made of casting stainless SCS 13(#304) or SCS 14(#316), these will have the capability of anti-acid & alkali; and also suitable for using in sea water.
- Since impeller is adjusted with a dynamic balancing there are little vibration and noise and an extraordinary durability is ensured.

■ APPLICATIONS:

- The pumps are applicable in the following industries: Chemistry, heavy-chemistry, medicines, photograph, dyeing, bleaching, food, fishery, drinks, brewing, oil and fat, fiber, oil refining, cosmetic, metal treatment and electro-plating.
- For a member of plant for preventing pollution, sewage and drainage treatment, washing plant, dust collecting plant and clean air plant.

■ PERFORMANCE CURVE :

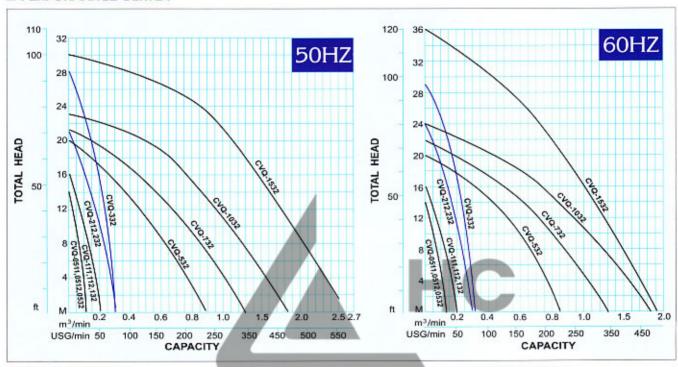

■ SPECIFICATIONS:

■ DIMENSIONS:

型式		2	E 動 i	微				水 機 JMP							重量	R SI			d SIZE	
TYPE	Pow	er	Phase	Volt	Dis-			Head 60HZ			Max. 50HZ		Max. 50HZ	1 1	Weight	OA.	В	С	D	E
	HP	KW	PH	V	Inch	mm		V .	M 3/	MIN	11.0	-	M 3/1	MIN	KG	mm	mm	mm	mm	mm
CVQ-0512 CVQ-0532	1/2	0.4	3	110/220 220-440	Ŀξ	25	8	9	0.07	0.06	14	14	0.11	0.13	20	260	75	100	220	355
CVQ-112 CVQ-132	1	0.75	1 3	110/220 220-440	1 1/2"	40	10	8.7	0.10	0.14	16	16	0.21	0.19	22	290 285	75 75	115 115	250 250	390 390
CVQ-212 CVQ-232	2	1.5	1 3	110/220 220-440	2'	50	14	14	0.12	0.17	21	24	0.29	0.29	31	325	90	125 125	290 290	445 425
CVQ-332	3	2.2	3	220-440	2"	50	12	16	0.17	0.20	28	29	0.30	0.31	40	310	90	125	290	445
CVQ-532	. 5	3.7	3	220-440	3"	80	12.9	10	0.44	0.54	20	20	0.88	0.85	59	350	100	135	305	506
CVQ-732	7 1/2	5.5	3	220-440	4"	100	11.3	12	0.98	0.92	21	22	1.31	1.30	73	405	125	145	345	540
CVQ-1032	10	7.5	3	220-440	4"	100	15.7	17.4	1.07	1.16	23	24	1.85	1.85	88	410	125	165	370	585
CVQ-1532	15	11	3	220-440	4"	100	17.9	24	1.68	1.25	30	36	2.5	1.91	118	430	125	165	370	585

PUMP CONSTRUCTION IS MADE OF CASTING STAINLESS.


PS: STAINLESS STEEL CASTING: BOTH SCS13(#304) AND SCS14(#316) ARE AVAILABLE UPON REQUEST.

BOTH SCS 13 (#304) AND SCS 14 (#316) ARE AVAILABLE UPON REQUEST.

■ CONSTRUCTIONS:

ITEM NO. PARTS LIST MATERIAL Motor Head Cover Cast Iron 4 Condenser 1¢ only (3) (3)(7)(13)(4) (7)(17)(29)(16) 5 Centrifugal Switch 1Ø only 7 **Upper Ball Bearing** 9 Coil 10 Shaft Stainless Steel Rotor Steel Plate 12 Steel Plate Cast Iron 13 Motor Casing 15 Mechanical Seal Teflon-Viton 16 Flange Setter Stainless Steel Casting 17 Motor Lower Cover Cast Iron Stainless Steel Casting 20 Pump Casing Stainless Steel Casting 21 Impeller Pump Bracket Stainless Steel Casting 29 (30(5))(9) (12)(10)(11) (15) (21)(20)(6-) 30 Cooling Fan Plastic 31 Fan Cover Steel

DIMENSIONS:



- SQ.KHQ-Submersible stainless sump pump~SCS 13 (#304)
- -Submersible stainless sewage pump~SCS 13 (#304)

SQ/SSQ/KHQ


■ FEATURES:

- Extra long life design, since the pump body and all related parts are made of casting stainless SCS 13(#304), these will have the capability of anti-acid & alkali; and also suitable for using in sea water.
- Equipped with double mechanical seals, together with anti-corrosion viton so as to make up these special assemblies.
- Impeller was balancing processed, this vibration free advantage brings the pump and motor superior servicing life.

■ PERFORMANCE CURVE :

■ APPLICATIONS:

- The pumps are applicable in the following industries: Chemistry, heavy-chemistry, medicines, photograph, dyeing, bleaching, food, fishery, drinks, brewing, oil and fat, oil refining, cosmetic, fiber, metal treatment and electro-plating.
- For a member of plant for preventing pollution, sewage and drainage treatment, washing plant, dust collecting plant and clean air plant.

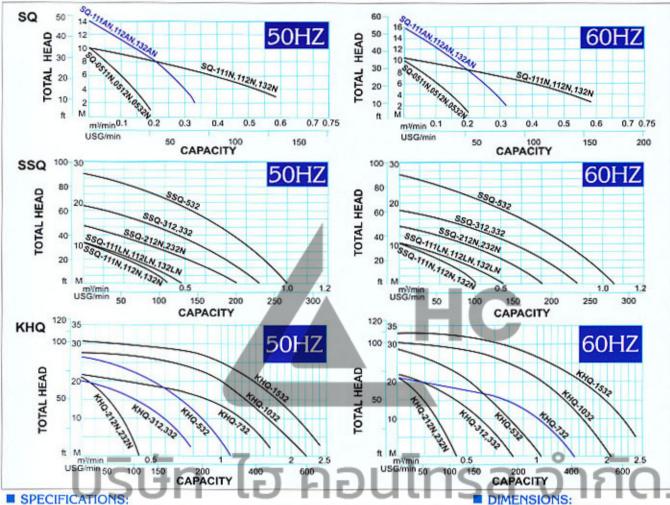


■ SPECIFICATIONS:	011			-	DIMENS
-------------------	-----	--	--	---	--------

型式		AM M	OTOR	22				Ħ	当 水 PUN						電瓶	重量		2	尺 SIZ	寸 ZE		
TYPE	Po	wer	Phase	Volt	Dis	ia.		Head 60HZ				Head 60HZ			Cable	Weight	А	В	С	D	Ε	F
Juniores	HP	KW	PH	٧	Inch	mm		M	M3	MIN	-	М	M ³	MIN	mm ² xM	KG	mm	mm	mm	mm	mm	mm
SQ-0511N				110																		
SQ-0512N	1/2	0.4	'	220	2'	50	7	6	0.08	0.10	10	10	0.21	0.21	1.25°x6	11	230	120	160	165	80	415
SQ-0532N			3	220-440													100					
SQ-111AN			4	110																		
SQ-112AN			- 60	220	2'	50	8.3	10.1	0.20	0.16	14	16	0.36	0.36	22×6	21	265	130	190	180	85	460
SQ-132AN	-	0.75	3	220-440																		
SQ-111N	,	0.75	4	110																		
SQ-112N				220	3"	80	6.2	6.2	0.38	0.39	10	10.5	0.71	0.72	22 x6	24	300	150	190	240	125	505
SQ-132N			3	220-440								285		12 194	NOTISE !	122	35000		ASSET		100	
SSQ-111N				110																		
SSQ-112N			1	220	2"	50	6.1	6.2	0.28	0.20	10	10	0.41	0.38	22x6	22	290	135	225	205	115	495
SSQ-132N		0.75	3	220-440				1000		17/19/2	1888	100	1	100000	(997.978)	1,535,50	00000		1	1000		1
SSQ-111LN		0.75		110																		
SSQ-112LN			1 1	220	3'	80	5	6.5	0.33	0.27	10	10	0.48	0.5	22x6	24	320	150	225	235	118	500
SSQ-132LN			3	220-440		77	177	1000	-		1000		-		77,075	187	STORY				1000	1
SSQ-212N			1	220	2.	-							0.00	-	0.62.40	36	355	165	265	260	140	550
SSQ-232N	2	1.5	3	220-440	3'	80	7.4	8.9	0.48	0.49	14	14	0.75	0.7	3.5 ² x10	36	355	165	265	260	140	445
SSQ-312	-		1	220	25.0	Same		100	2020	20.100	1000		0.00	2000	20.80	53	410	192	265	290	140	580
SSQ-332	3	2.2	3	220-440	4"	100	11	10	0.40	0.41	19	18	0.86	0.87	3.5 ² x10	45	410	192	265	290	140	480
SSQ-532	5	3.7	3	220-440	4"	100	14.2	16	0.51	0.49	27	27	1.0	1.05	3.5 ² x10	49	410	192	265	290	140	500
KHQ-212N			1	220	-	100000						10/12/21		100000000000000000000000000000000000000		46	228	80	560			
KHQ-232N	2	1.5	3	220-440	2"	50	11.5	12.3	0.21	0.21	20	21	0.41	0.41	3.5 ² x10	37	228	80	460			
KHQ-312			1	220												49	228	80	670			
KHQ-332	3	2.2	3	220-440	3"	80	10.2	12.2	0.46	0.50	20	22	0.8	0.82	3.5 ² x10	40	228	80	570			
KHQ-532	5	3.7	3	220-440	4"	100	13.5	15.7	0.62	0.65	26	28	1.14	1.05	3.5 ² x10	49	232	100	605			
KHQ-732	7 1/2		3	220-440	4"	100	12.8	12.3	1.08	1.04	22	21	1.7		5.5 ² x10	70	272	125	720			
KHQ-1032	10	7.5	3	220-440	6'	150	19.3	16.7	1.33	1.39	27	30	2.2	2.1	5.5 ² x10	78	272	125	665			
KHQ-1532	15	11	3	220-440		150	17.7	19.6		1.64	30	32	2.4	2.4	82×10	115	335	200	785			

- PUMP CONSTRUCTION IS MADE OF CASTING STAINLESS.
- ONLY SCS13 (#304) IS AVAILABLE.


CONSTRUCTIONS:

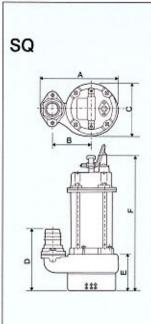

SQ		由人	À	1
(4)———			7	3
6-			岸	5
8				9
14				12
7				15 17
20	117			18
23		00	J	22

ITEM NO.	PARTS LIST	MATERIAL			
1	Cable	V. C. T.			
2	Handle	Stainless Steel (#304)			
3	Motor Head Cover	Stainless Steel Casting			
4	Condenser	1⊅ only			
5	Centrifugal Switch	1⊅ only			
6	Upper Bracket	Stainless Steel Casting			
7	Upper Ball Bearing				
8	Bolt	Stainless Steel			
9	Coil				
10	Shaft	Stainless Steel			
11	Rotor	Steel Plate			
12	Stator	Steel Plate			
13	Motor Casing	Stainless Steel (#304)			
14	Hose Coupling	Plastic			
15	Mechanical Seal	Silicon Carbide + Viton			
16	Flange Setter	Stainless Steel Casting			
17	Motor Lower Cover	Stainless Steel Casting			
18	Mechanical Seal Cover	Stainless Steel Casting			
19	Oil Seal	Viton			
20	Pump Casing	Stainless Steel Casting			
21	Impeller	Stainless Steel Casting			
22	Suction Cover	Stainless Steel Casting			
23	Strainer	Stainless Steel			


P S: Stainless Steel Casting : SCS 13 (#304)

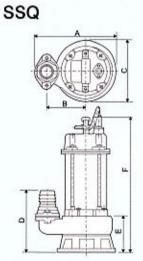

SSQ			A	1
4		0 0		-(3)
6			iii)	
8			D	9
12	4			13
14				13
16				15
21		一一事	F	18
20	1	700	一一一一	19
22	4		= 1	23

ITEM NO.	PARTS LIST	MATERIAL
1	Cable	V. C. T.
2	Handle	Stainless Steel (#304)
3	Motor Head Cover	Stainless Steel Casting
4	Condenser	1¢ only
5	Centrifugal Switch	1¢ only
6	Upper Bracket	Stainless Steel Casting
7	Upper Ball Bearing	
8	Bolt	Stainless Steel
9	Coil	
10	Shaft	Stainless Steel
- 11	Rotor	Steel Plate
12	Stator	Steel Plate
13	Motor Casing	Stainless Steel (#304)
14	Hose Coupling	2" -Plastic 3".4"-Stainless Steel Casting
15	Mechanical Seal	Silicon Carbide + Viton
16	Flange Setter	Stainless Steel Casting
17.	Motor Lower Cover	Stainless Steel Casting
18	Mechanical Seal Cover	Stainless Steel Casting
19	Oil Seal	Viton
20	Pump Casing	Stainless Steel Casting
21	Impeller	Stainless Steel Casting
22	Suction Cover	Stainless Steel Casting
23	Strainer	Plastic

สินธิค ธโ

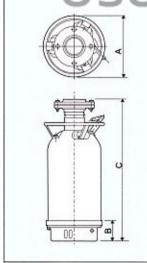

16	_¢⊊	<u></u>	
	43	1	14
2) —①
	4		3
6	44		1
7 —			5
8		7	9
12			
12			13
7	一川し油	斯山	25
15			17
19	1		18
21			20
22	T 00	+	23

TEM NO.	PARTS LIST	MATERIAL
1	Cable	V. C. T.
2	Handle	Stainless Steel (#304)
3	Motor Head Cover	Stainless Steel Casting
4	Condenser	1© only
5	Centrifugal Switch	10 only
6	Upper Bracket	Stainless Steel Casting
7	Upper Ball Bearing	-
8	Bolt	Stainless Steel
9	Col	
10	Shaft	Stainless Steel
11	Rotor	Steel Plate
12	Stator	Steel Plate
13	Motor Casing	Stainless Steel (#304)
14	Hose Coupling	Stainless Steel Casting
15	Mechanical Seal	Silicon Carbide + Vitor
16	Flange Setter	Stainless Steel Casting
17	Motor Lower Cover	Stainless Steel Casting
18	Mechanical Seal Cover	Stainless Steel Casting
19	Oil Seal	Viton
20	Pump Casing	Stainless Steel Casting
21	Impeller	Stainless Steel Casting
22	Suction Cover	Stainless Steel Casting
23	Strainer	Stainless Steel (#304)
25	Outer Cover	Stainless Steel (#304)

PT. LUKES INDONESI

Lindeteves Trade Center Lt UG, Blok B1 No. 6 Jalan Hayam Wuruk, Jakarta - Indonesia Phone: 021 - 6231 7842, 628 5144

Fax: 021 - 6231 0499 email: sales@lukesindonesia.com

