Avionics Panel rev 1 front plate, seen from the BACK (machined side)

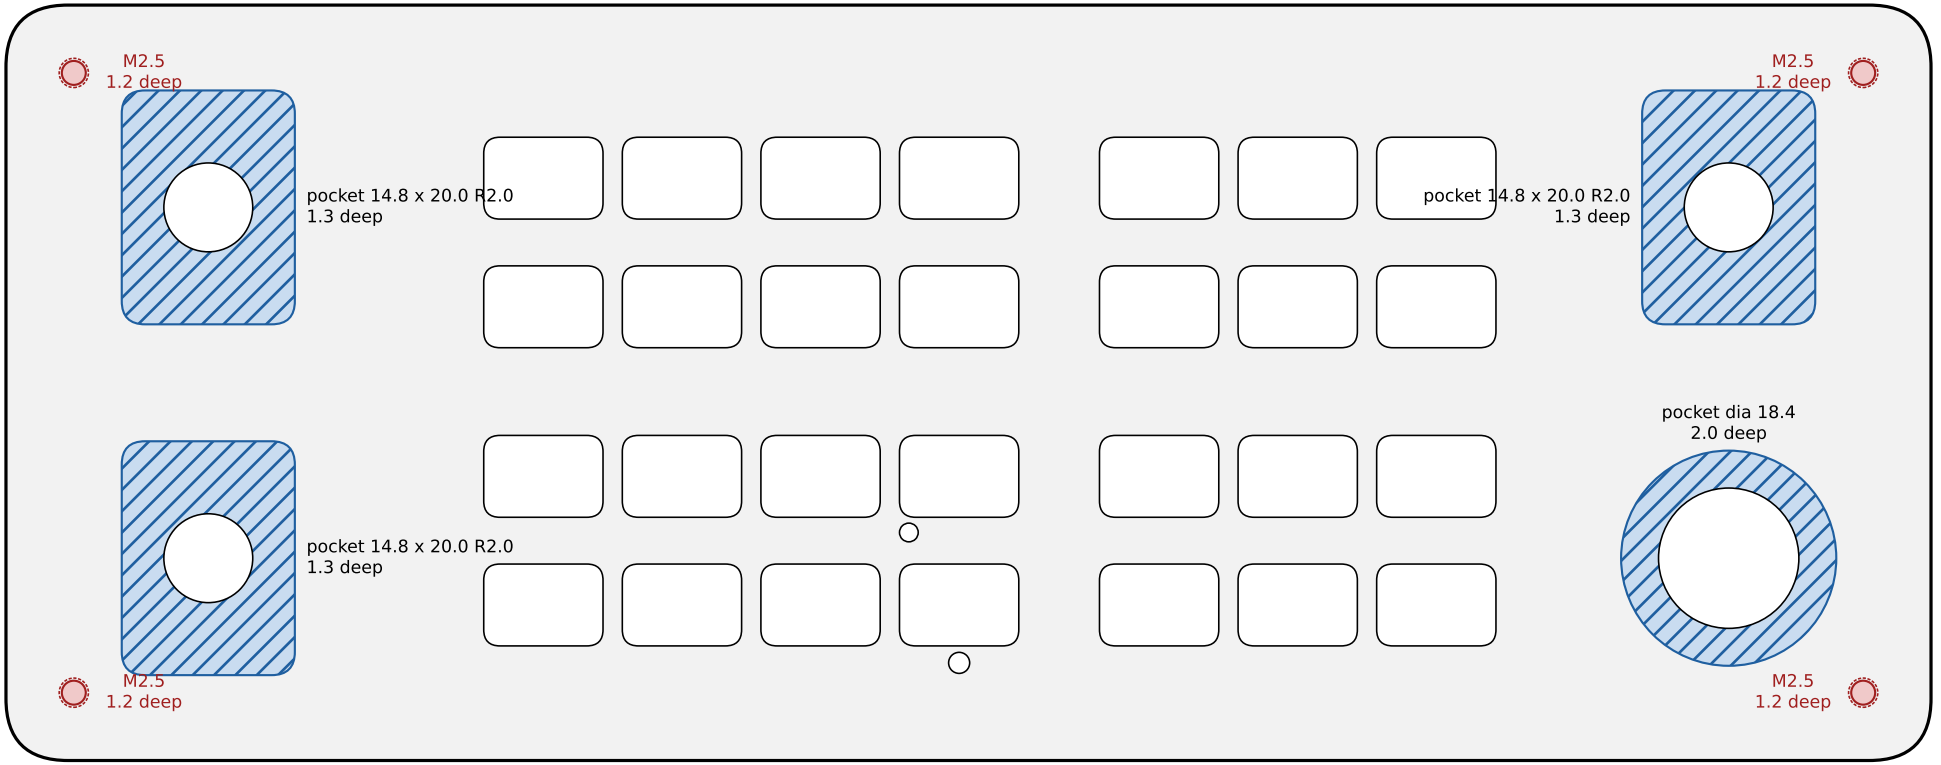

Features

key hole	10.2 x 7.0 R1.4	through	x28
encoder hole	dia 7.6	through	x3
encoder pocket	14.8 x 20.0 R2.0	1.3 deep from back	x3
RANGE hole	dia 12.0	through	x1
RANGE pocket	dia 18.4	2.0 deep from back	x1
SHIFT light hole	dia 1.8	through	x1
UNIT light hole	dia 1.6	through	x1
threaded hole	M2.5, tap drill 2.05	full thread 1.2 min, drill 2.2 incl. point, from back	x4

Notes

- Material 6061 aluminium, 3 mm. Outline 164.6 x 64.6 mm, corner R5.3. Volume 23.9 cm3. Units mm, general tolerance ISO 2768-m.
- Front face (+Z in the STEP) is flat: no pockets, chamfers or fastener holes on the front.
- 4 x M2.5 blind threads from the back: full thread 1.2 mm min. (bottoming tap), drill depth 2.2 mm INCLUDING the 118 deg point, so 0.8 mm stays in front of the drill tip. Must not break through or mark the front face.
- Finish: black anodised, matte (bead blasted before anodising).
- Marking on the front per avionics-panel-rev1-plate.dxf, same origin (bottom-left, seen from the front): layer LASER = laser marking, layer UV_ORANGE = UV print orange. Layer CUT = outline and through holes for reference.
- Deburr all edges, edge break 0.2 on the front outline and hole edges.