Exp. No: 11
Date:

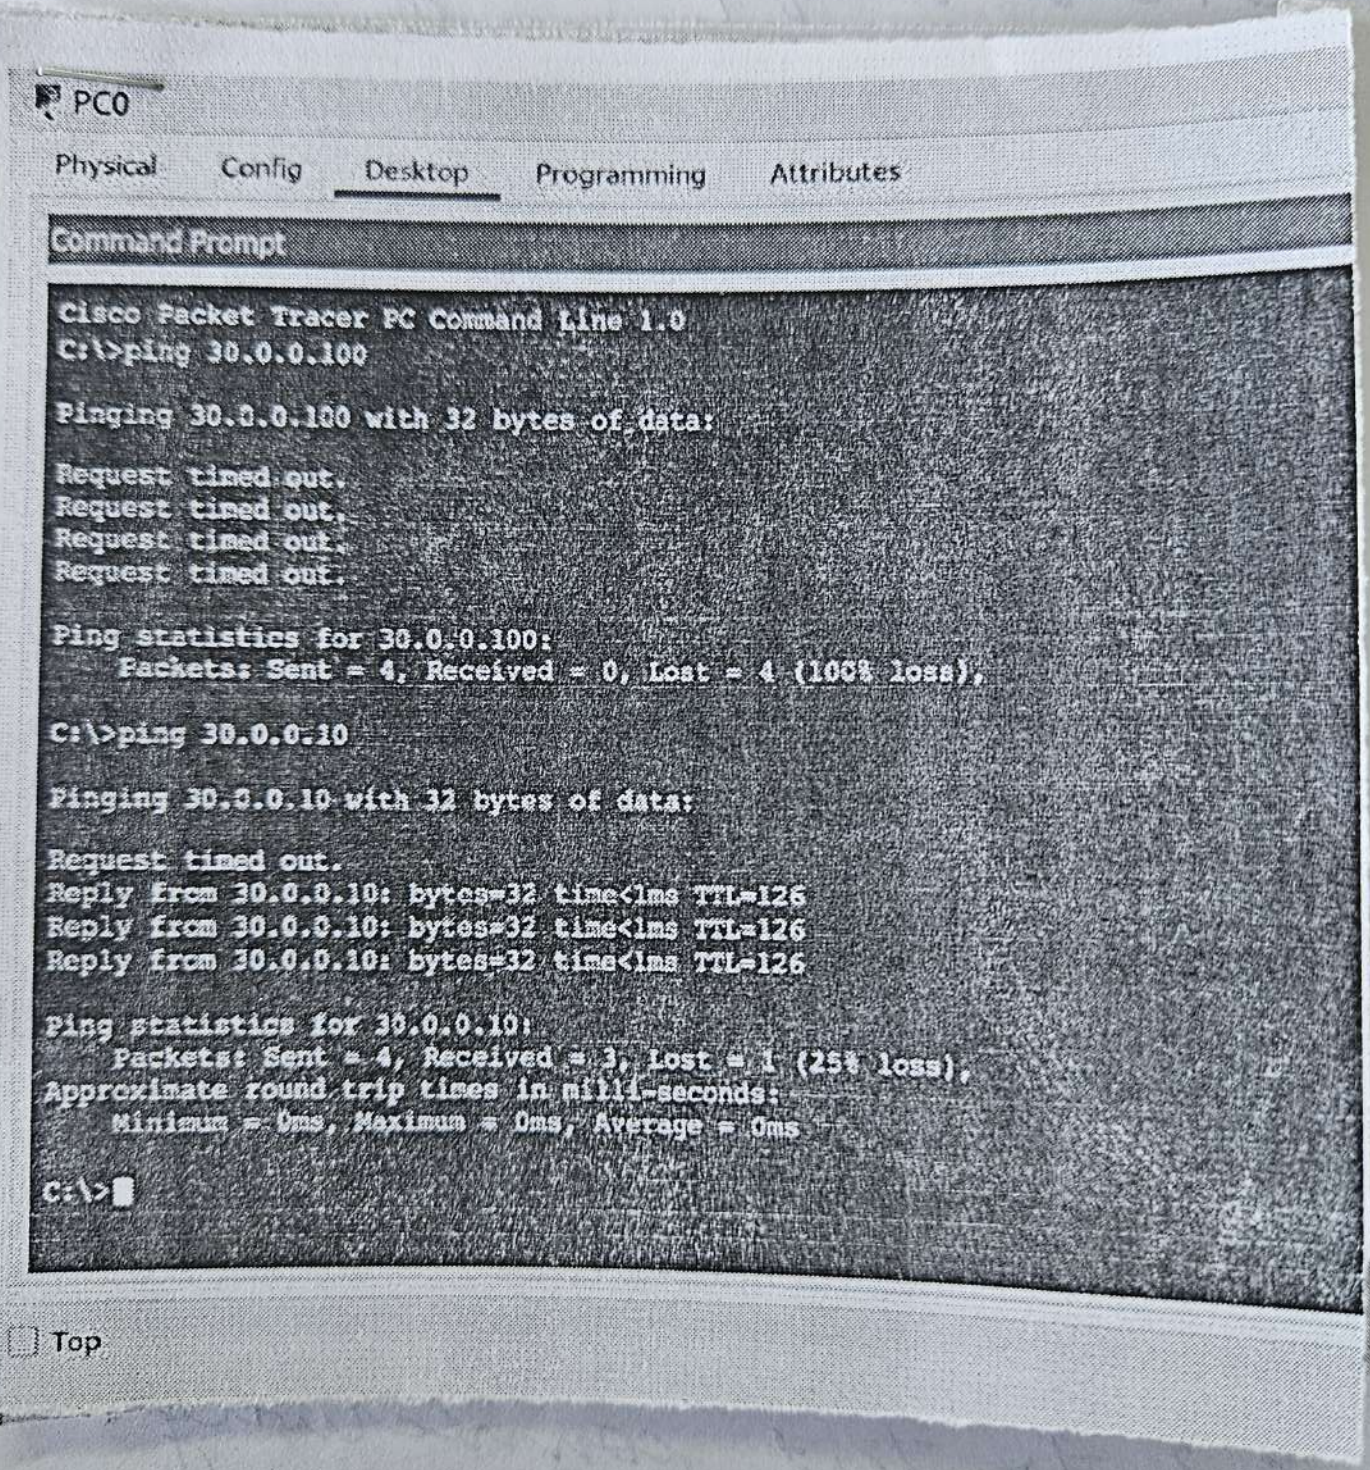
Examine network address translation (NAT) using cisco packet tracer.

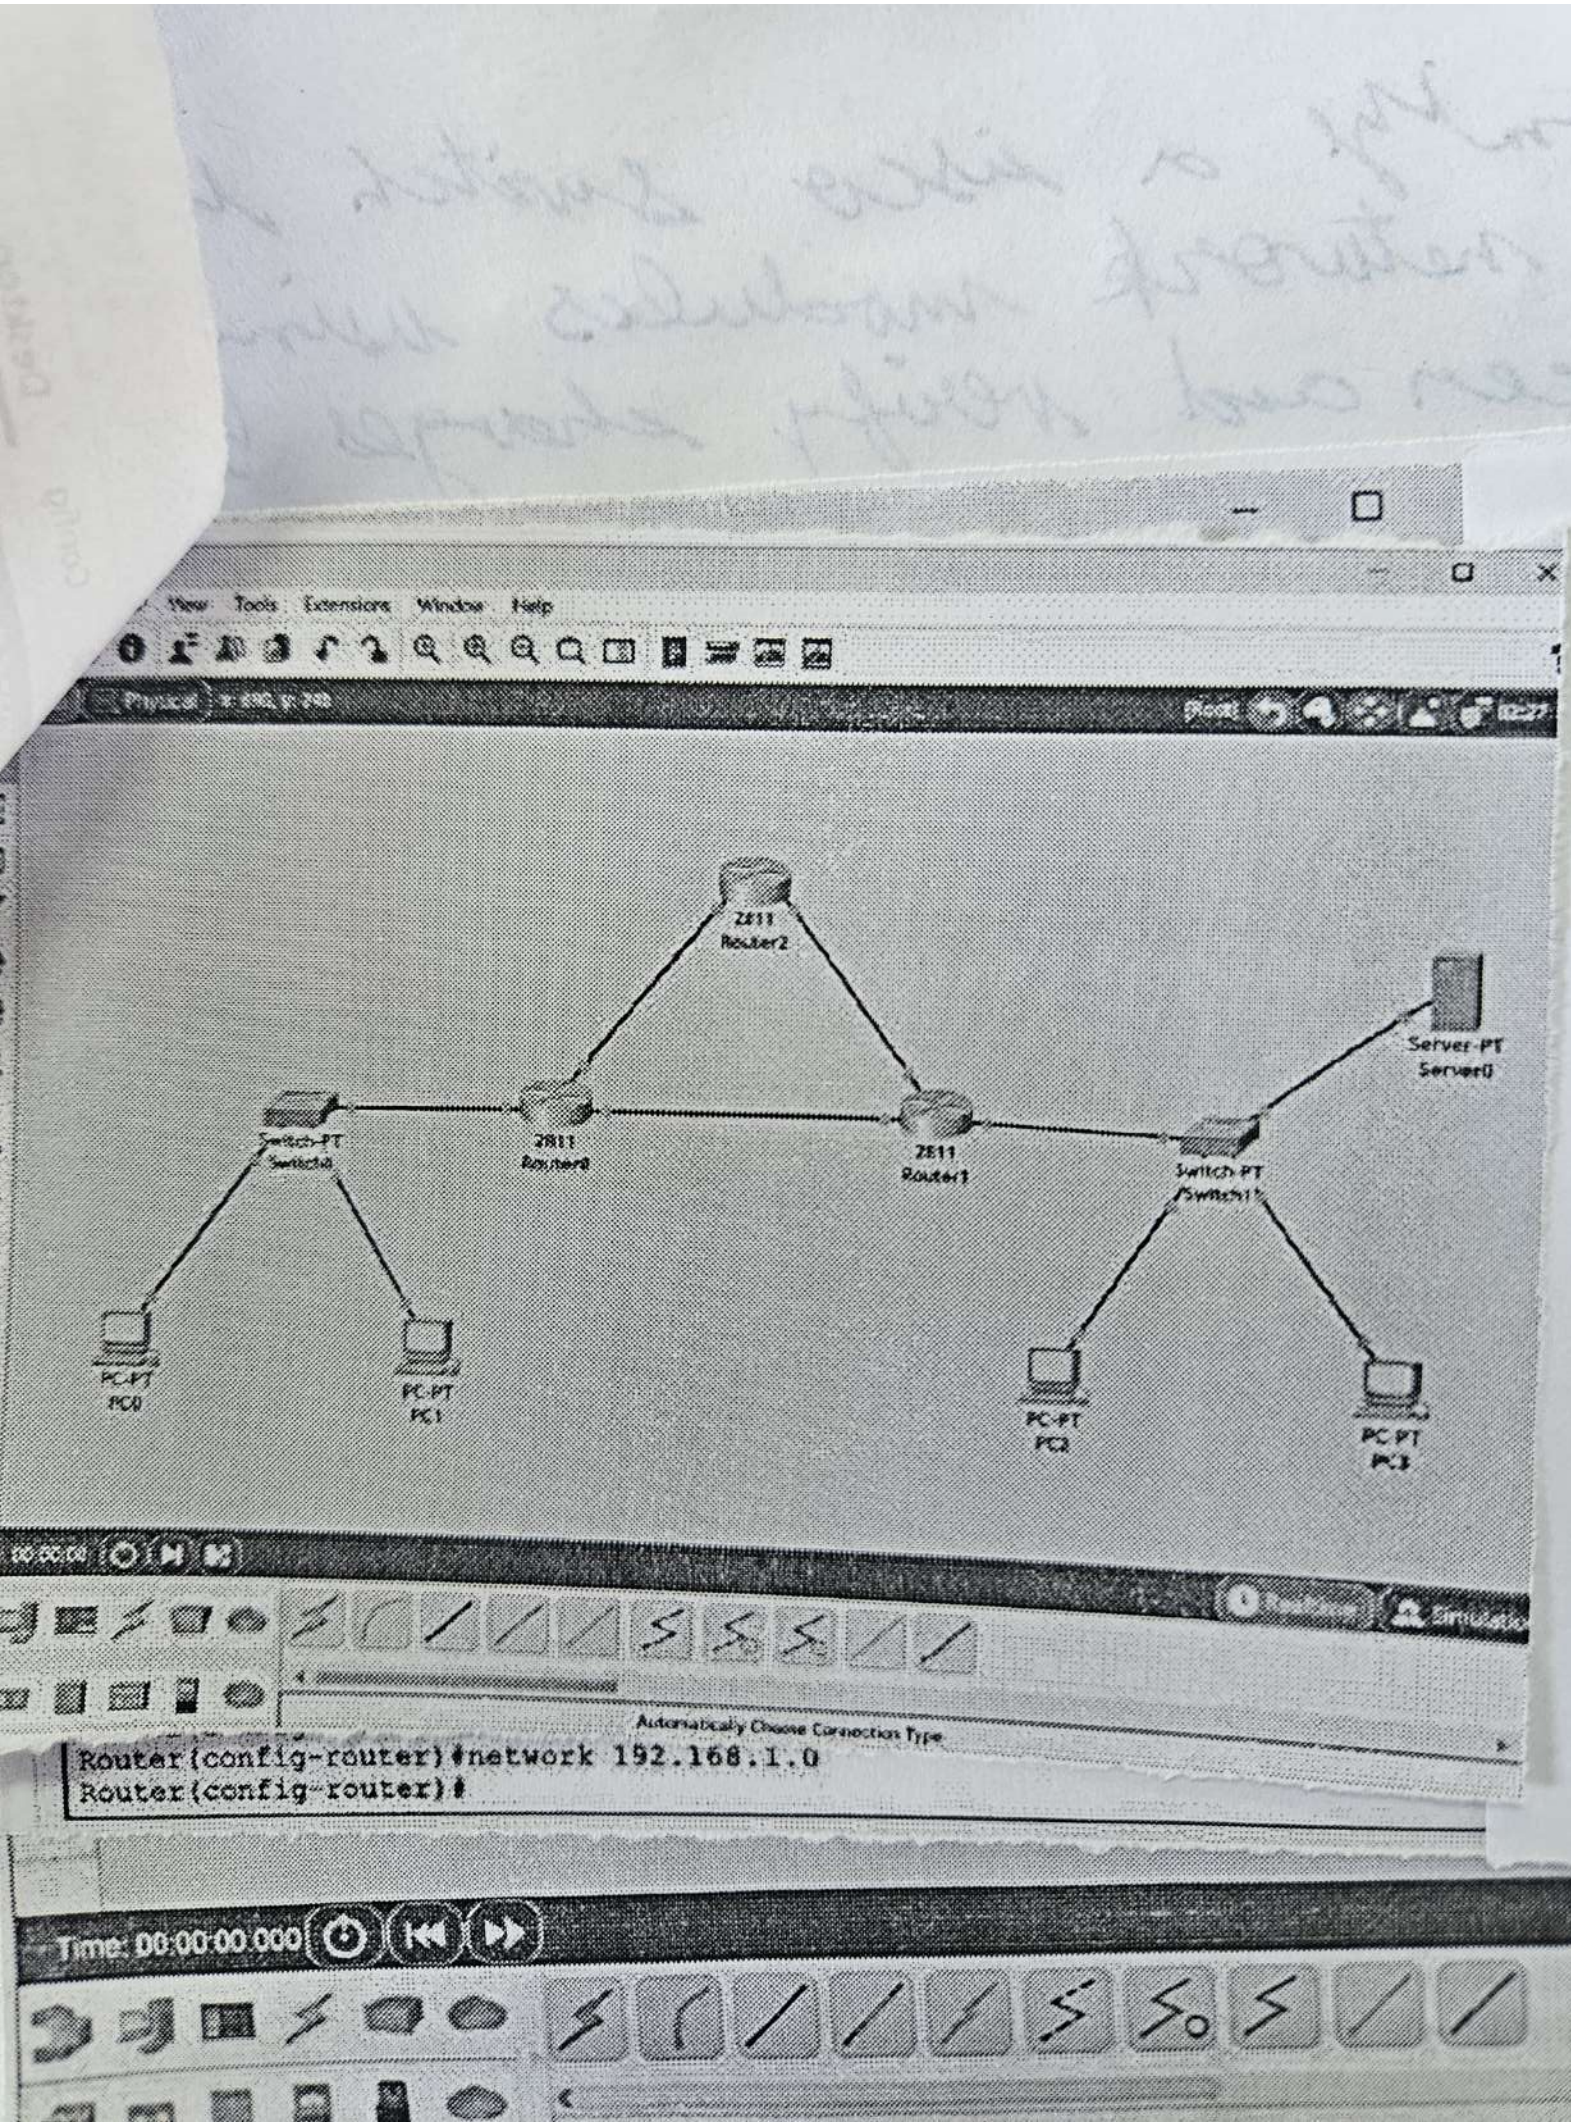
Aim:

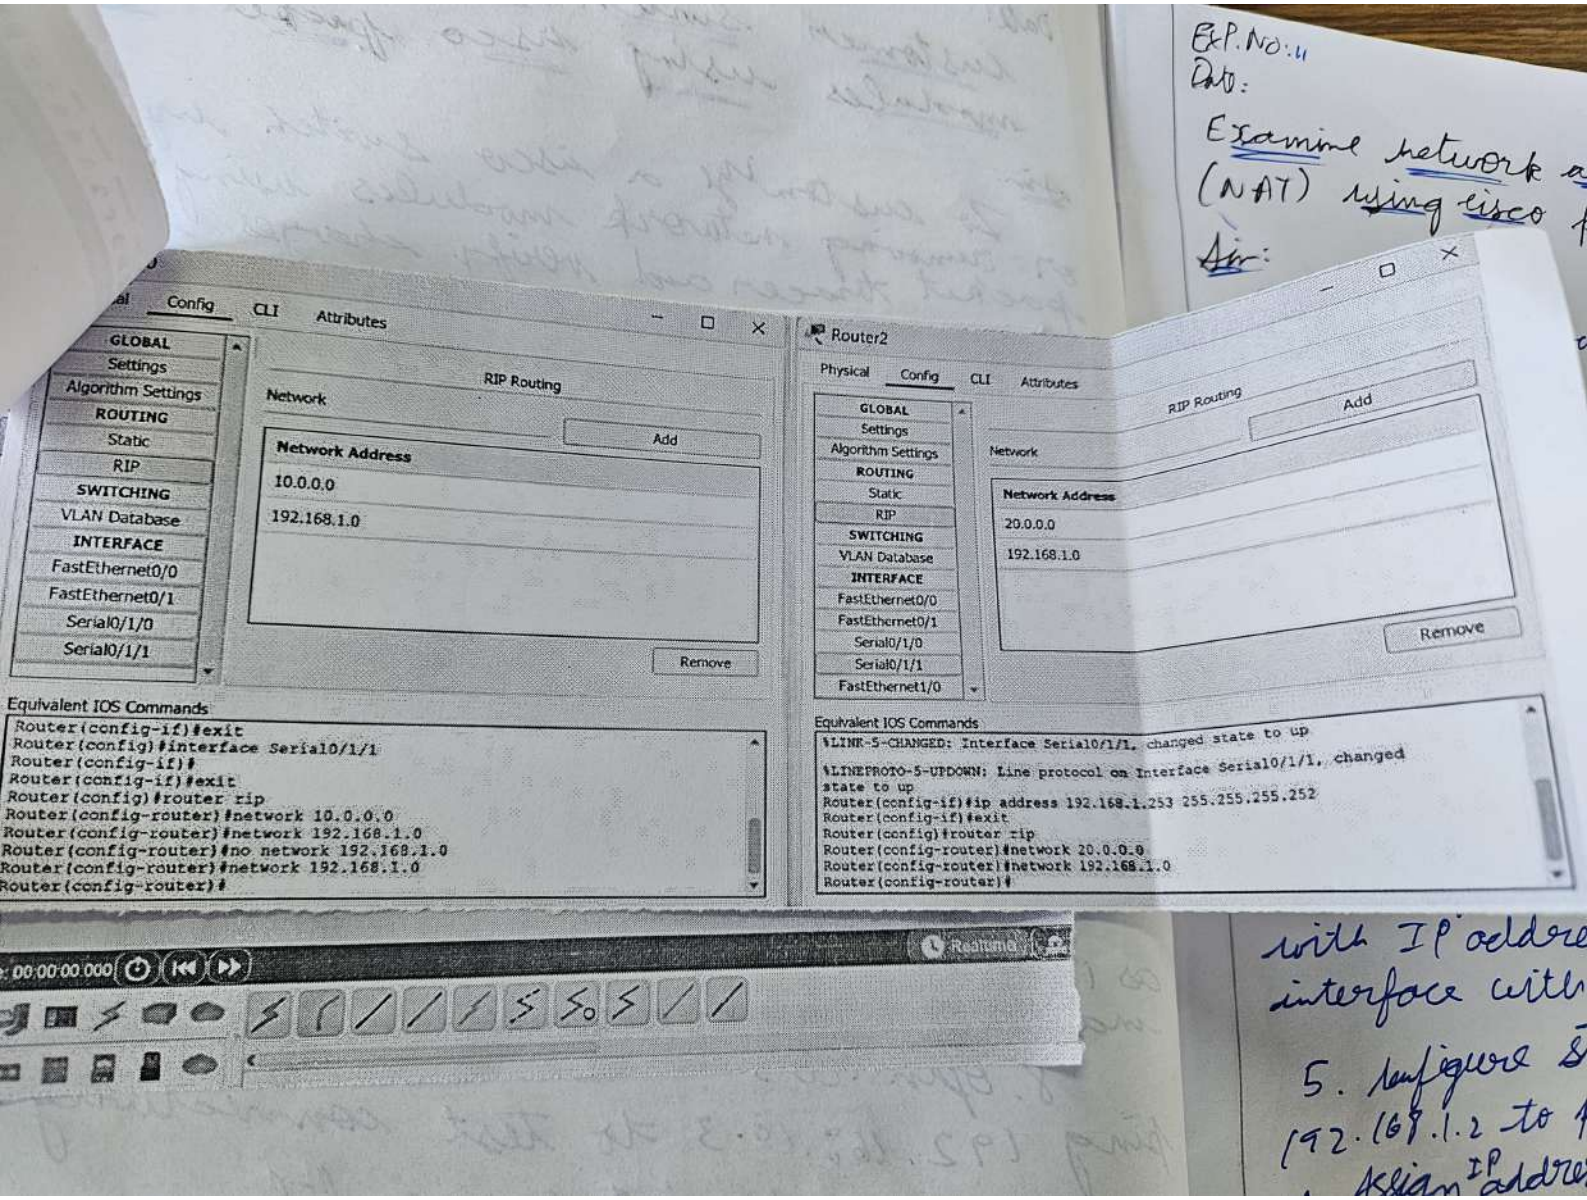
To configure and examine network address translation (NAT) using cisco packet tracer and verify communication b/w a private network and public network.

Procedure:

1. Open Cisco Packet Tracer.
2. Add one router, one switch, one Pc and one server.
3. Connect the devices using copper straight through cables.
4. Configure the routers inside interface with IP address 192.168.1.1 and outside interface with IP address 192.168.12.1
5. Configure static NAT to map private IP 192.168.1.2 to public IP 200.1.1.100.
6. Assign IP addresses and default gateway to Pc and server.
7. From Pc's command prompt, execute ping 200.1.1.2 to test connectivity.
8. On the router CLI, # executes show input translations to verify NAT translation.


PC0
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 30.0.0.100
Pinging 30.0.0.100 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 30.0.0.100:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>ping 30.0.0.10
Pinging 30.0.0.10 with 32 bytes of data:
Request timed out.
Reply from 30.0.0.10: bytes=32 time<1ms TTL=126
Reply from 30.0.0.10: bytes=32 time<1ms TTL=126
Reply from 30.0.0.10: bytes=32 time<1ms TTL=126
Ping statistics for 30.0.0.10:
Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>
Top

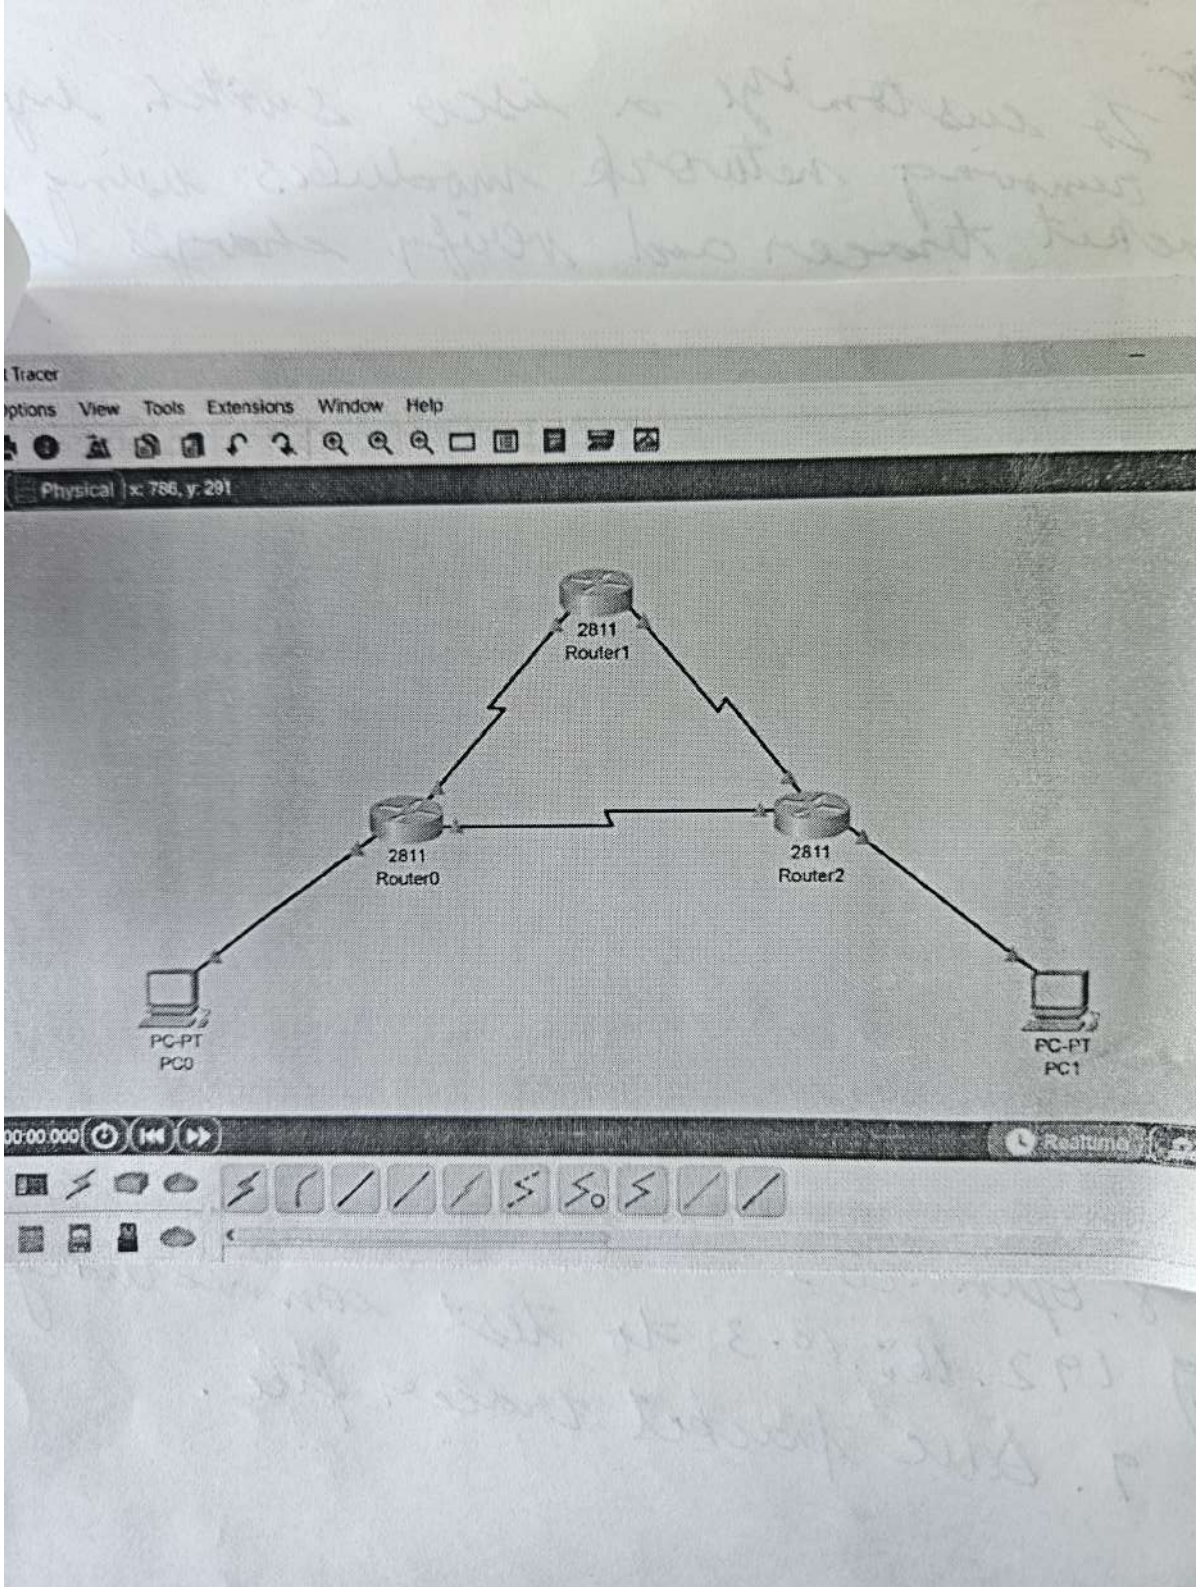

Router2
Server-PT
Server0
Router0
Router1
Switch1
PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
Automatically Choose Connection Type
Router(config-router)#network 192.168.1.0
Router(config-router)#
Time: 00:00:00.000



Exp. No: 11
Date:

Examine network a
(NAT) using cisco
Aim:

with IP addre
interface with
5. Configure S
192.168.1.2 to
Assign IP addre


Tracer
Options View Tools Extensions Window Help
Physical x: 786, y: 291
2811
Router1
2811
Router0
2811
Router2
PC-PT
PC0
PC-PT
PC1
Realtime

Result:

Thus, network address translation (NAT) was configured successfully using cisco packet tracer.