

ISP

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>enable
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 192.168.0.100 255.255.255.0
Router(config-if)#ip address 192.168.0.100 255.255.255.0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#ip address 100.10.10.1 255.0.0.0
Router(config-if)#ip address 100.10.10.1 255.0.0.0
Router(config-if)#
Router(config-if)#EXEx
Router(config)#access-list 1 permit 192.168.0.0 0.0.0.255
Router(config)#ip nat pool white-address 100.10.11.77 100.10.11.99 netmask 255.255.255.0
Router(config)#ip nat inside source list 1 pool white-address
ip nat pool white-address lip nat inside source list 1
poll white-addressip nat inside source list 1 poll white-addressip nat inside source list
1 poll white-addressip nat inside source list 1 poll white-addressip nat inside source
list 1 pool white-address
Router(config)#int fa0/0
Router(config-if)#ip nat inside
Router(config-if)#int fa0/1
Router(config-if)#ip nat outside
Router(config-if)#ex
Router(config)#
Router(config)#
Router(config)#
Router(config)#interface FastEthernet0/0
Router(config-if)#no shutdown
Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```

Copy Paste

☐ Top

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

☐ Top

PC1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Request timed out.
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:


Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

☐ Top

сеть. был дан публичный адрес 100.10.11.77 из пула адресов NAT

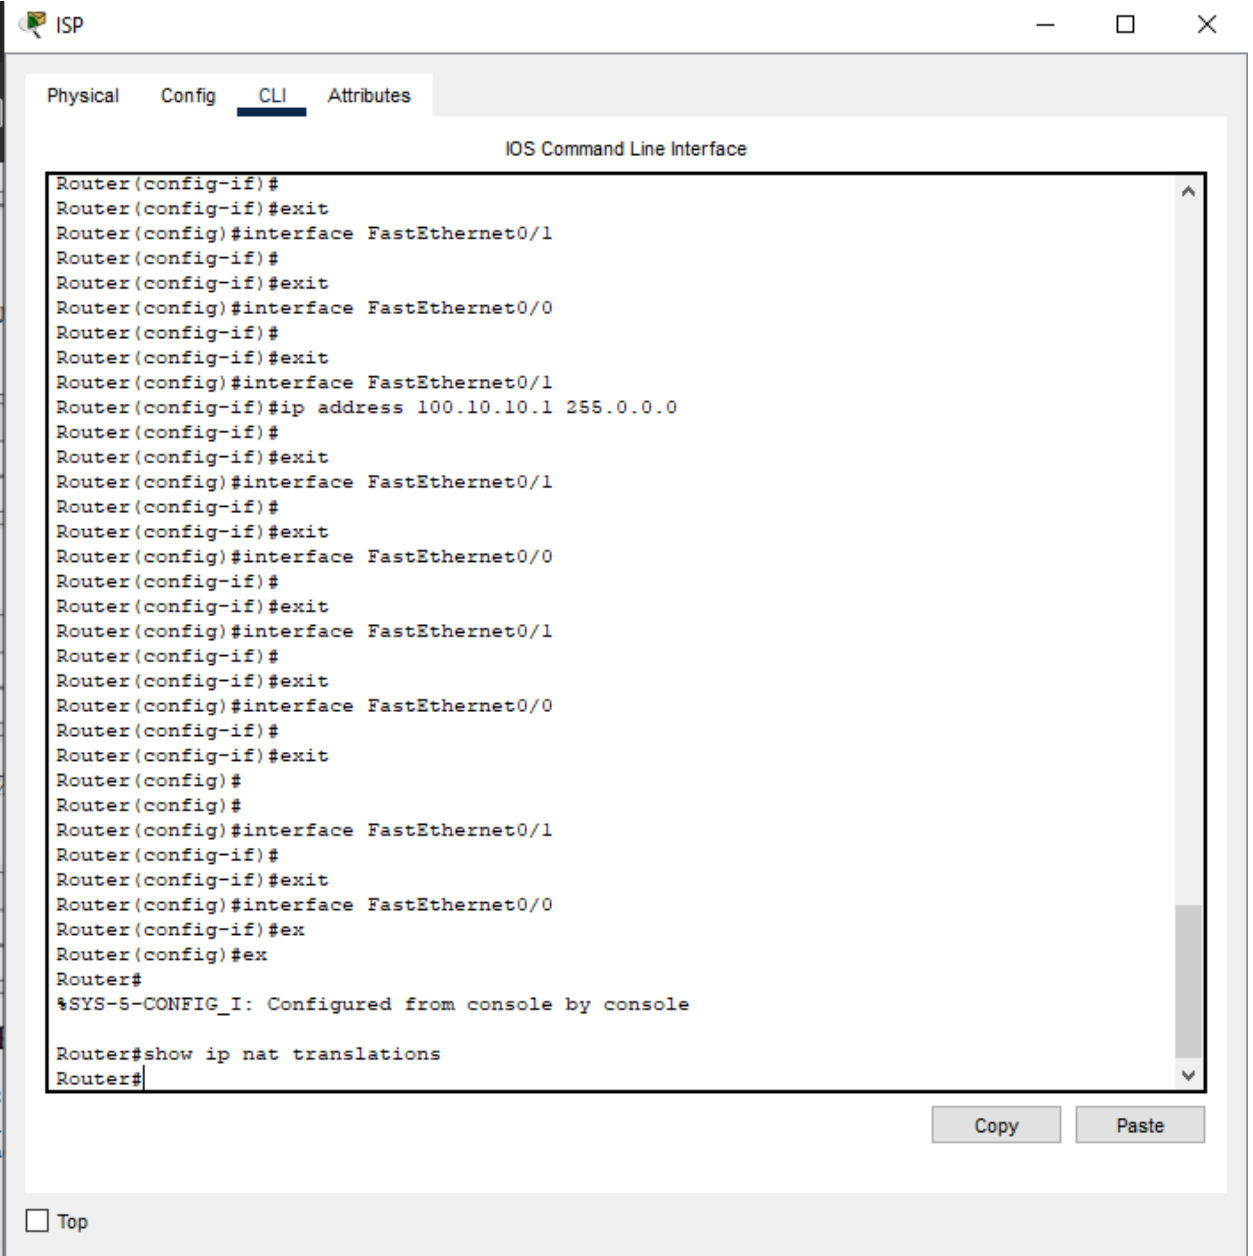

Physical **Config** CLI Attributes

GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
SWITCHING
VLAN Database
INTERFACE
FastEthernet0/0
FastEthernet0/1

FastEthernet0/0	
Port Status	<input checked="" type="checkbox"/> On
Bandwidth	<input checked="" type="radio"/> 100 Mbps <input type="radio"/> 10 Mbps <input checked="" type="checkbox"/> Auto
Duplex	<input type="radio"/> Half Duplex <input checked="" type="radio"/> Full Duplex <input checked="" type="checkbox"/> Auto
MAC Address	000A.4198.4B01
IP Configuration	
IPv4 Address	192.168.0.100
Subnet Mask	255.255.255.0
Tx Ring Limit	10

Equivalent IOS Commands

```
Router#show ip nat translations
Router#
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
```

☐ Top

Physical **Config** CLI Attributes

GLOBAL
Settings
Algorithm Settings
ROUTING
Static
RIP
SWITCHING
VLAN Database
INTERFACE
FastEthernet0/0
FastEthernet0/1

FastEthernet0/1	
Port Status	<input checked="" type="checkbox"/> On
Bandwidth	<input checked="" type="radio"/> 100 Mbps <input type="radio"/> 10 Mbps <input checked="" type="checkbox"/> Auto
Duplex	<input type="radio"/> Half Duplex <input checked="" type="radio"/> Full Duplex <input checked="" type="checkbox"/> Auto
MAC Address	000A.4198.4B02
IP Configuration	
IPv4 Address	100.10.10.1
Subnet Mask	255.0.0.0
Tx Ring Limit	10

Equivalent IOS Commands

```
Router#
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
```

☐ Top

Router1

PhysicalConfigCLIAttributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status

☒ On

Bandwidth

☒ 100 Mbps☐ 10 Mbps

☒ Auto

Duplex

☐ Half Duplex☒ Full Duplex

☒ Auto

MAC Address

0050.0F76.1B01

IP Configuration

IPv4 Address

100.10.10.2

Subnet Mask

255.0.0.0

Tx Ring Limit

10

Equivalent IOS Commands

Router#

%SYS-5-CONFIG_I: Configured from console by console

Router#ipishow ip nat translations

Router#

Router#

Router#configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#interface FastEthernet0/0

Router(config-if)#

Router(config-if)#

Router(config-if)#exit

Router(config)#interface FastEthernet0/0

Router(config-if)#

☐ Top