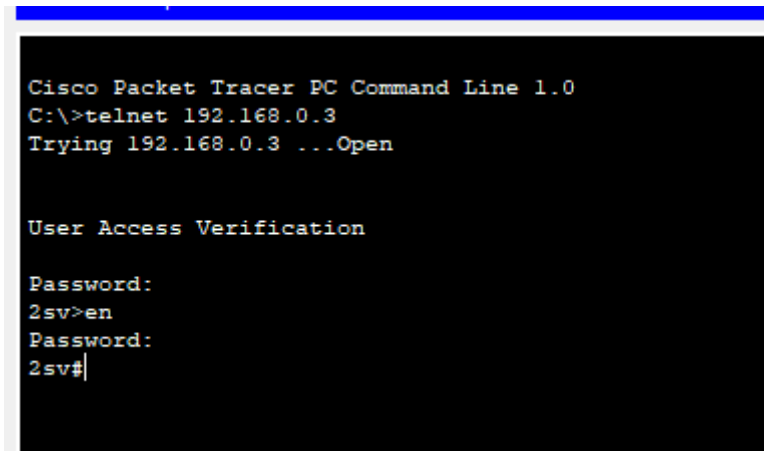
Cisco Packet Tracer PC Command Line 1.0
C:\>telnet 192.168.0.3
Trying 192.168.0.3 ...Open
User Access Verification
Password:
2sv>en
Password:
2sv#

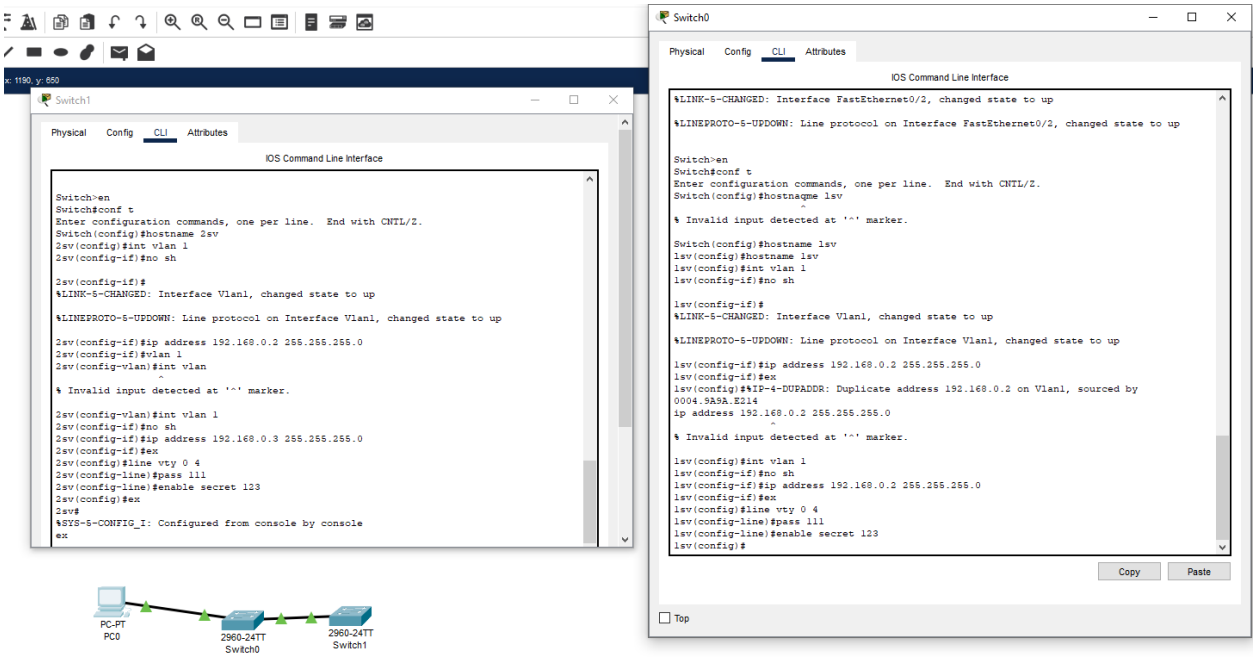
Switch1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname 2sv
2sv(config)#int vlan 1
2sv(config-if)#no sh
2sv(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
2sv(config-if)#ip address 192.168.0.2 255.255.255.0
2sv(config-if)#vlan 1
2sv(config-vlan)#int vlan
% Invalid input detected at '^' marker.
2sv(config-vlan)#int vlan 1
2sv(config-if)#no sh
2sv(config-if)#ip address 192.168.0.3 255.255.255.0
2sv(config-if)#ex
2sv(config)#line vty 0 4
2sv(config-line)#pass 111
2sv(config-line)#enable secret 123
2sv(config)#ex
2sv#
%SYS-5-CONFIG_I: Configured from console by console
ex
PC-PT
PC0
2960-24TT
Switch0
2960-24TT
Switch1
Switch0
Physical
Config
CLI
Attributes
IOS Command Line Interface
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostnqme lsv
% Invalid input detected at '^' marker.
Switch(config)#hostname lsv
lsv(config)#hostname lsv
lsv(config)#int vlan 1
lsv(config-if)#no sh
lsv(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
lsv(config-if)#ip address 192.168.0.2 255.255.255.0
lsv(config-if)#ex
lsv(config)#%IP-4-DUPADDR: Duplicate address 192.168.0.2 on Vlan1, sourced by
0004.9A9A.E214
ip address 192.168.0.2 255.255.255.0
% Invalid input detected at '^' marker.
lsv(config)#int vlan 1
lsv(config-if)#no sh
lsv(config-if)#ip address 192.168.0.2 255.255.255.0
lsv(config-if)#ex
lsv(config)#line vty 0 4
lsv(config-line)#pass 111
lsv(config-line)#enable secret 123
lsv(config)#
Copy
Paste
Top