

ROLL NO: 231901047
NAME :SASIKUMAR.B
EXP NO:7

Examining Network Address Translation (NAT) using Cisco Packet Tracer

Aim: Examining Network Address Translation (NAT) using Cisco Packet Tracer involves several steps. NAT is commonly used to allow multiple devices on a local network to share a single public IP address for accessing the internet. Here's how you can set up and examine NAT using Cisco Packet Tracer:

1. Setting Up the Network Topology

- **Devices Required:**
 1. One or more PCs (for testing connectivity)
 2. One router (to configure NAT)
 3. One switch (to connect the PCs and the router)
 4. One server (to simulate an external network, like the internet)
- **Steps:**
 1. **Place the Devices:** Drag and drop the required devices onto the workspace.
 2. **Connect the Devices:** Use the appropriate cables (copper straight-through for PCs to the switch, copper cross-over for switch to router) to connect the devices.
 3. **Assign IP Addresses:**
 - Assign private IP addresses (e.g., 192.168.1.0/24) to the PCs and the router's internal interface.
 - Assign a public IP address (e.g., 200.0.0.1/30) to the router's external interface.
 - Assign an IP address to the server that simulates an external network (e.g., 200.0.0.2/30).

2. Configuring NAT on the Router

- **Steps:**
 1. **Access the Router CLI:** Click on the router and go to the CLI tab.
 2. **Enter Global Configuration Mode:**

```
Router> enable
Router# configure terminal
```

3,Configure Interfaces:

Define an access list to match the internal IP range:

```
Router(config)# access-list 1 permit 192.168.1.0 0.0.0.255
```

The screenshot displays the Cisco Packet Tracer interface. On the left, a network diagram shows a central router connected to three devices: a PC labeled 'PC-PT PC0' with IP 192.168.10.10 and MAC 08:00:20:10:10:10, another PC labeled 'PC-PT PC1' with IP 192.168.20.20 and MAC 08:00:20:10:20:20, and a server labeled 'Server-PT Server0'. The router has two interfaces visible: Fa0/20 and S0/0/0. A configuration window for the router is open, showing the following commands:

```
Router(config)#ifconfig s0/0/0  
Router(config-if)#  
!IPV6-to-CHANGES: Interface FastEthernet0/0, changed state to up  
!LINEPROTO-to-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up  
  
Router(config-if)#  
Router(config-if)#exit  
Router(config)#interface Serial2/0  
Router(config-if)#no ip address  
Router(config-if)#ip address 192.162.10.1 255.255.255.0  
Router(config-if)#no shutdown  
Router(config-if)#  
!IPV6-to-CHANGES: Interface Serial2/0, changed state to up  
!LINEPROTO-to-UPDOWN: Line protocol on Interface Serial2/0, changed state to up  
  
Router(config-if)#exit  
Router(config)#ip nat inside source static 10.10.10.0 80 80.80.0.0  
Router(config)#ip nat inside source static 10.10.10.0 80 80.80.0.0  
Router(config-if)#ip nat inside  
Router(config-if)#ip nat outside  
Router(config-if)#exit  
Router(config)#interface FastEthernet 1/0  
Router(config-if)#ip nat outside  
Router(config-if)#exit  
Router(config)#interface serial 1/0  
!Invalid interface type and number.  
Router(config-if)#serial 2/0  
Router(config-if)#exit  
Router(config)#ip route 60.0.0.0 255.0.0.0 192.162.10.2  
Router(config)#end  
Router#
```

The bottom status bar indicates 'Time: 00:21:10' and 'Realtime' simulation mode.

This configures PAT (Port Address Translation), which allows multiple internal IPs to share a single external IP.

3. Testing NAT


- **Steps:**
 1. **Ping from a PC to the External Network:**
 - From one of the PCs, open the command prompt and try to ping the external server (e.g., `ping 200.0.0.2`).
 2. **Verify NAT Translations:**

On the router CLI, check the NAT translation table to see the active translations:

```
Router# show ip nat translations
```

Observe the Output:

The NAT translation table should show the mapping of the internal private IP addresses to the external public IP.

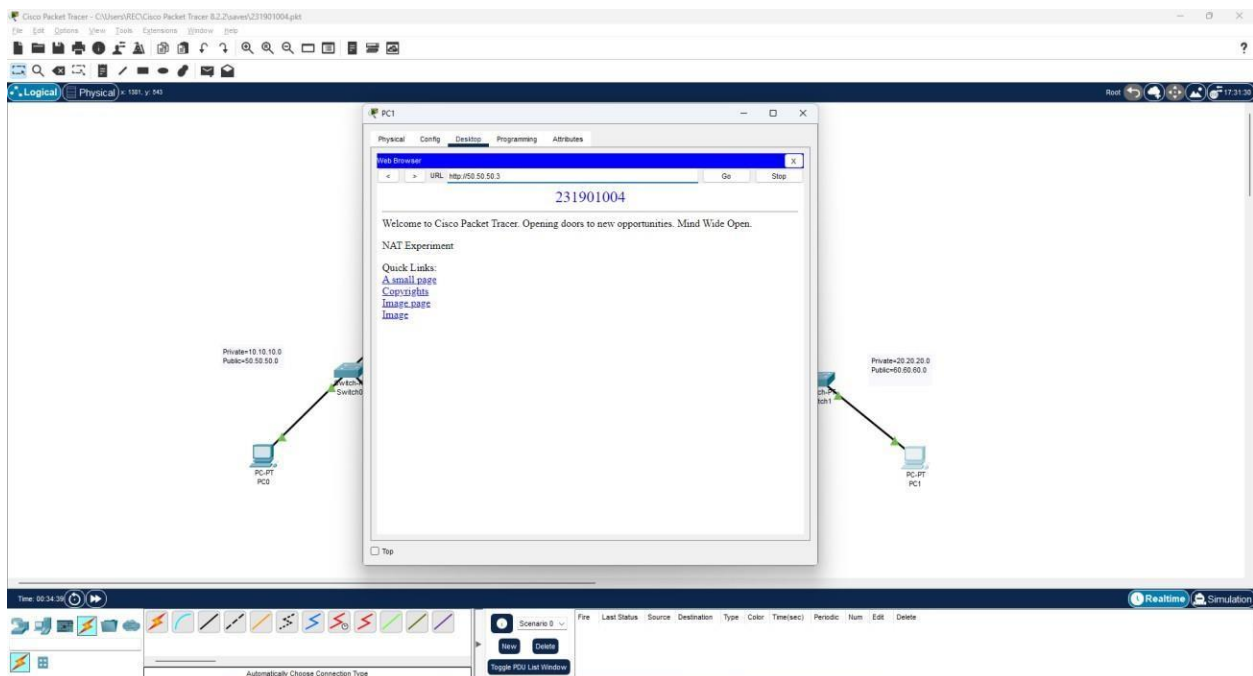

4. Observing the Traffic

- Use the simulation mode in Packet Tracer to visually observe the NAT process as packets move from the internal network to the external network.

5. Saving the Configuration

Don't forget to save the configuration on the router to avoid losing the settings:

```
Router# copy running-config startup-config
```

By following these steps, you can effectively examine and understand how NAT works in a network environment using Cisco Packet Tracer.

Result:

Thus, the experiment of Network Address Translation(NAT) was Examined.