Chapter 6
Wireless and Mobile Networks

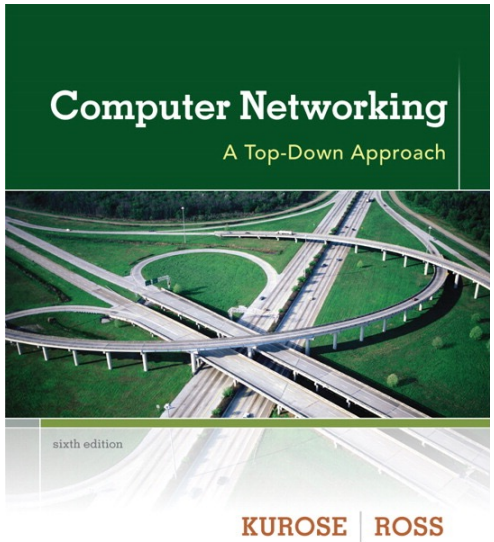

Reti degli Elaboratori
Prof.ssa Chiara Petrioli
a.a. 2022/2023

Computer Networking: A Top Down Approach
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

We thank for the support material Prof. Kurose-Ross

IEEE 802.11 Wireless LAN

- 802.11b
  - 2.4-5 GHz unlicensed spectrum
  - up to 11 Mbps
  - direct sequence spread spectrum (DSSS) in physical layer
    - all hosts use same chipping code
- 802.11a
  - 5-6 GHz range
  - up to 54 Mbps
- 802.11g
  - 2.4-5 GHz range
  - up to 54 Mbps
- 802.11n: multiple antennae
  - 2.4-5 GHz range
  - up to 200 Mbps

- all use CSMA/CA for multiple access
- all have base-station and ad-hoc network versions

802.11 LAN architecture

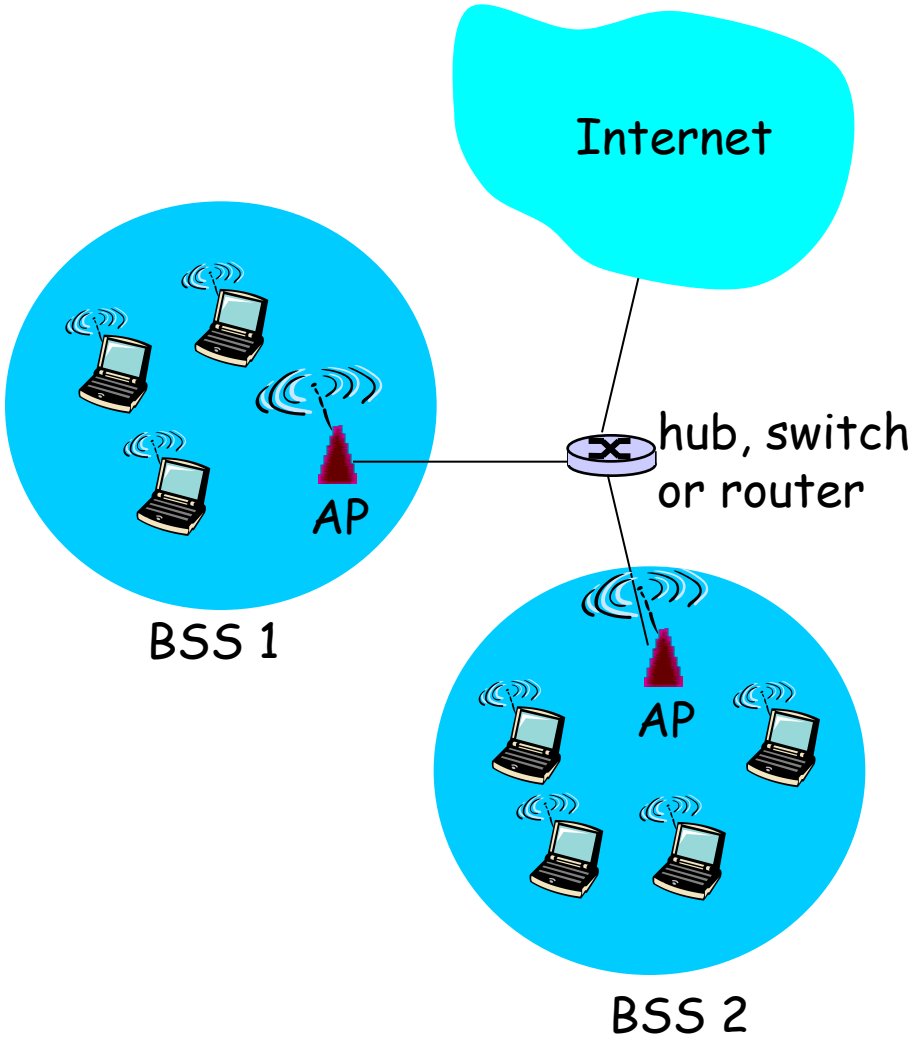

- wireless host communicates with base station
  - base station = access point (AP)
- Basic Service Set (BSS) (aka "cell") in infrastructure mode contains:
  - wireless hosts
  - access point (AP): base station
  - ad hoc mode: hosts only

IEEE 802.11: multiple access

- avoid collisions: 2+ nodes transmitting at same time
- 802.11: CSMA - sense before transmitting
  - don't collide with ongoing transmission by other node
- 802.11: *no* collision detection!
  - difficult to receive (sense collisions) when transmitting due to weak received signals (fading)
  - can't sense all collisions in any case: hidden terminal, fading
  - goal: *avoid collisions:* CSMA/C(ollision)A(voidance)

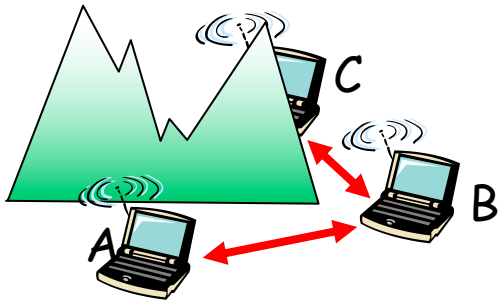

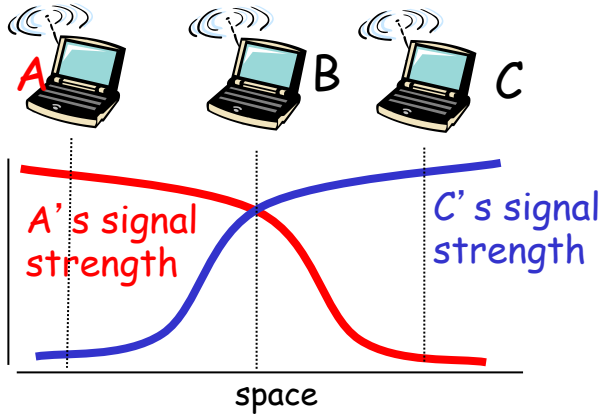

Collision Avoidance: RTS-CTS exchange

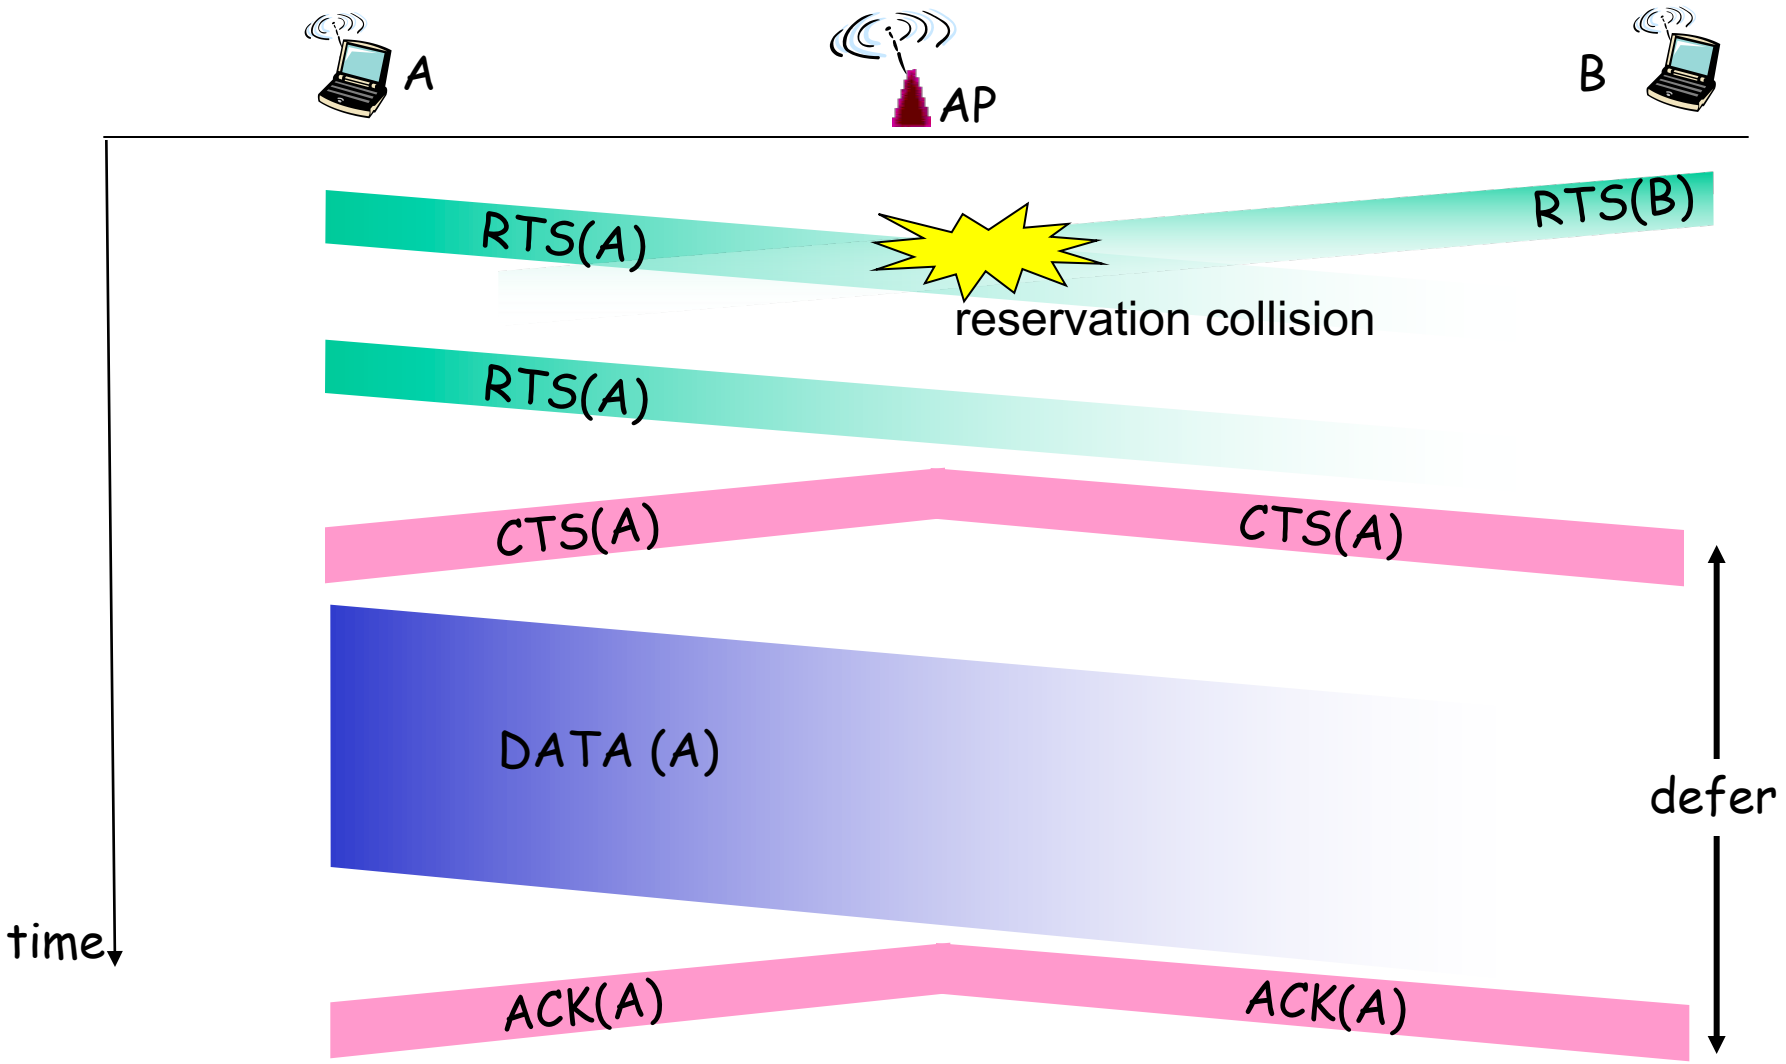

802.11: Channels, association

- 802.11b: 2.4GHz-2.485GHz spectrum is divided into 11 partially overlapping channels at different frequencies
  - AP admin chooses frequency for AP
  - interference possible: channel can be same as that chosen by neighboring AP!
  - maximum number of non interfering co-located AP: 3 (using channels 1,6,11), as channels are non overlapping only if they are separated by four or more channels
- host: must *associate* with an AP (usually many available, the WiFi jungle)
  - Passive scanning:
    - scans channels, listening for *beacon frames* containing AP's name (SSID) and MAC address
      - AP periodically sends a beacon frame
    - active scanning
      - a probe is sent by the user, APs with the range of the wireless host answer the probe
  - selects AP to associate with, sends an association request to which the AP answers
  - may need to perform authentication
  - will typically run DHCP to get IP address in AP's subnet

802.11: passive/active scanning

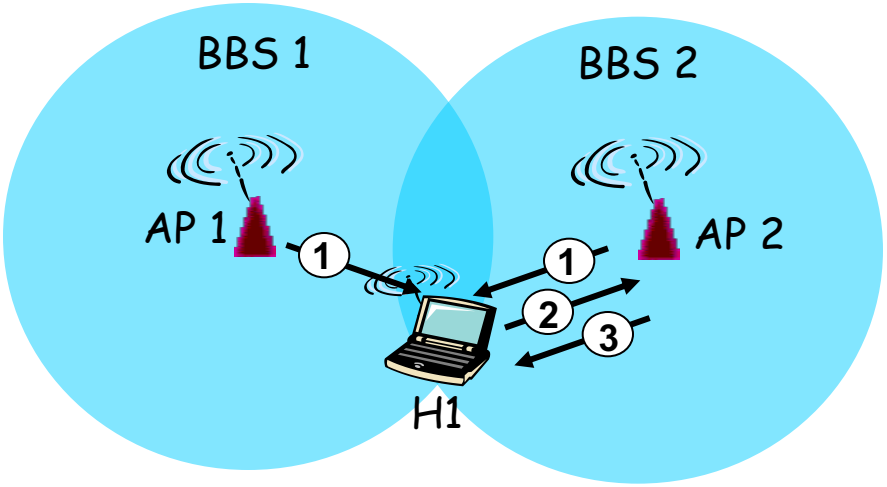

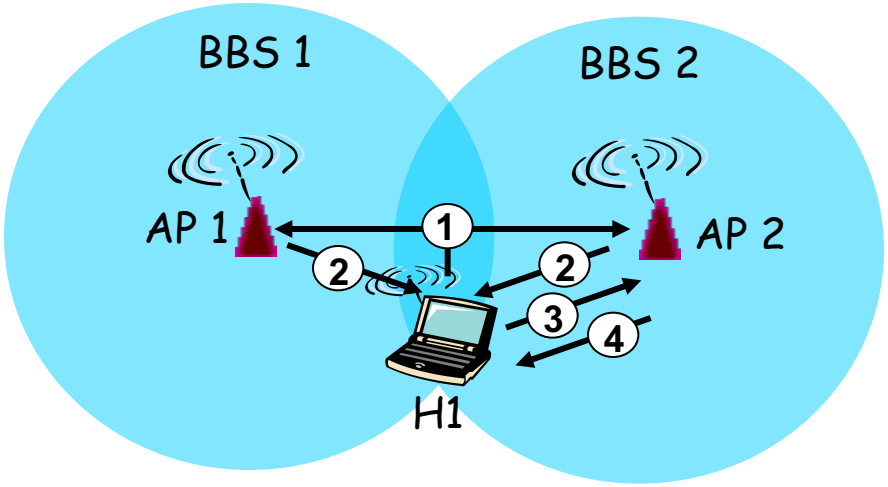

Passive Scanning:

(1) beacon frames sent from APs
(2) association Request frame sent: H1 to selected AP
(3) association Response frame sent: H1 to selected AP

Active Scanning:

(1) Probe Request frame broadcast from H1
(2) Probes response frame sent from APs
(3) Association Request frame sent: H1 to selected AP
(4) Association Response frame sent: H1 to selected AP

802.11 frame: addressing

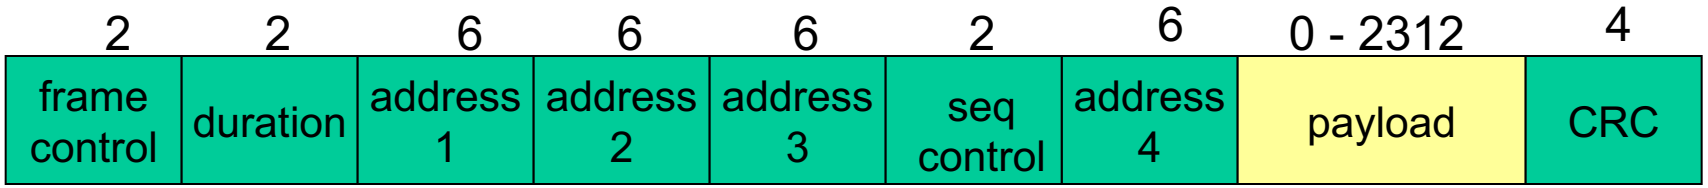

Address 1: MAC address of wireless host or AP to receive this frame

Address 2: MAC address of wireless host or AP transmitting this frame

Address 3: MAC address of router interface to which AP is attached

Address 4: used only in ad hoc mode

802.11 frame: addressing

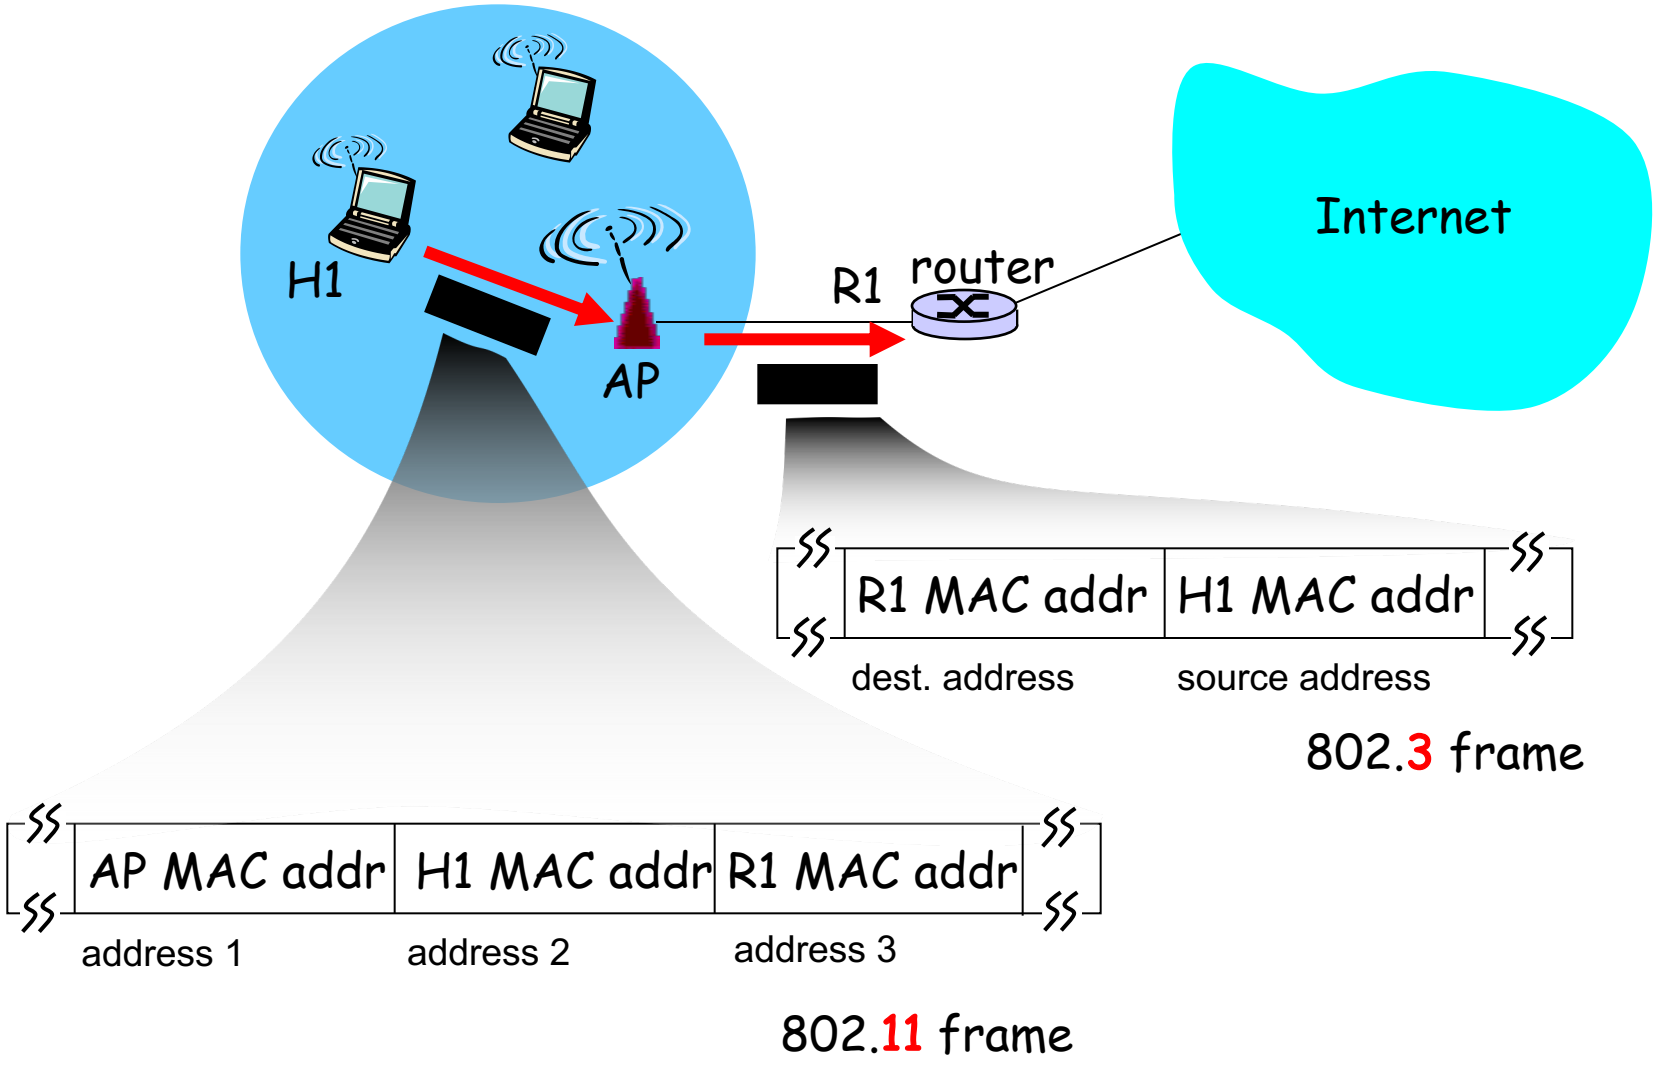

802.11 frame: more

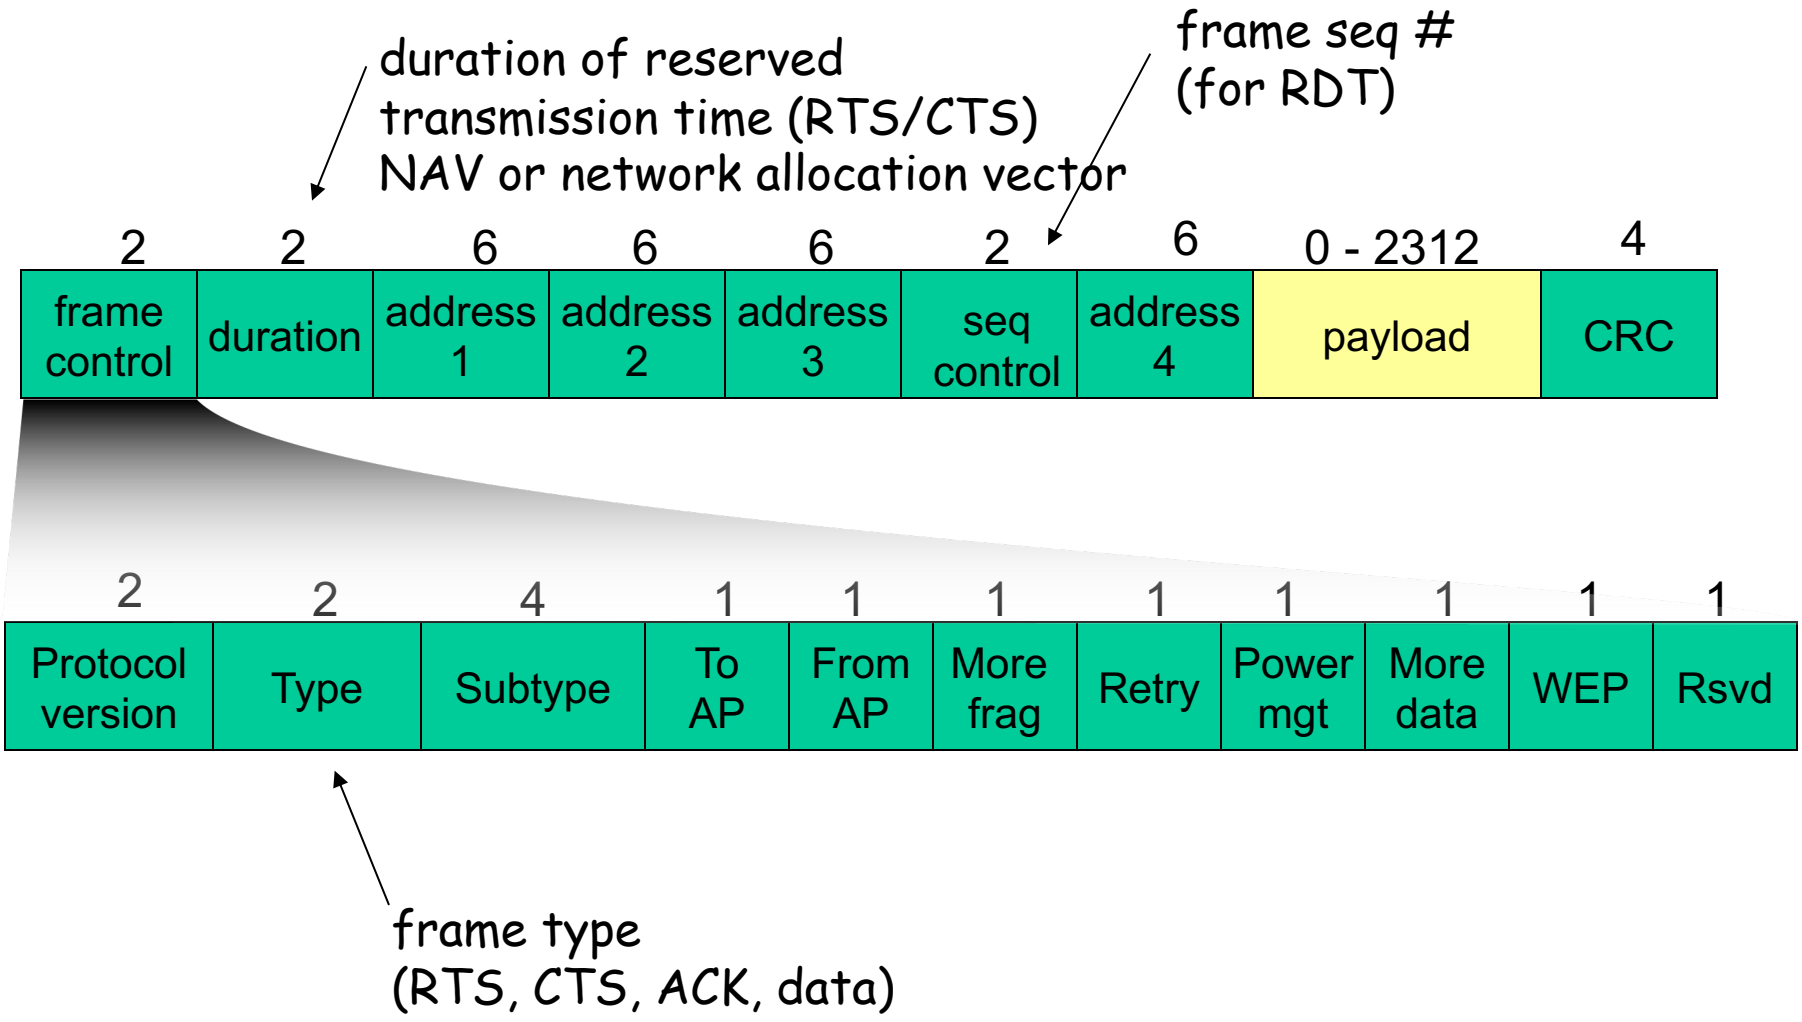

802.11: mobility within same subnet

- H1 remains in same IP subnet: IP address can remain same
- switch: which AP is associated with H1?
  - self-learning (Ch. 5): switch will see frame from H1 and "remember" which switch port can be used to reach H1

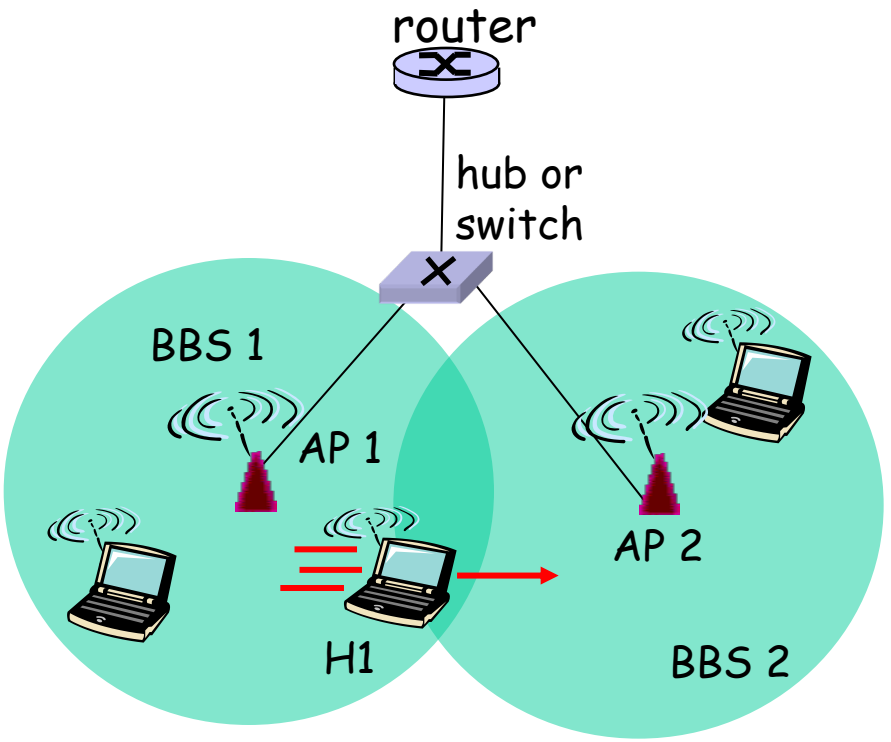

802.11: advanced capabilities

Rate Adaptation

- base station, mobile dynamically change transmission rate (physical layer modulation technique) as mobile moves, SNR varies

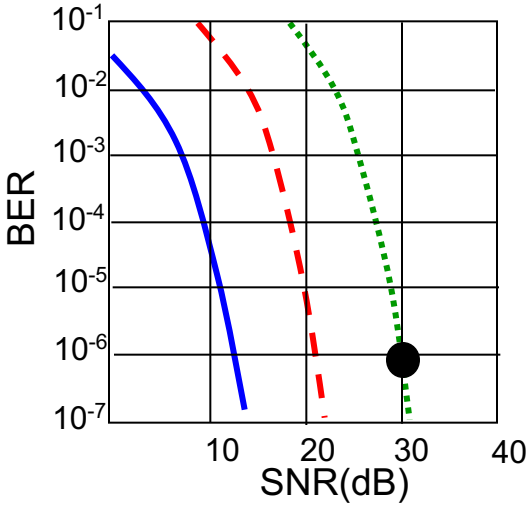



1. SNR decreases, BER increase as node moves away from base station

2. When BER becomes too high, switch to lower transmission rate but with lower BER

802.11: advanced capabilities

Power Management

- node-to-AP: "I am going to sleep until next beacon frame"
  - AP knows not to transmit frames to this node
  - node wakes up before next beacon frame
- beacon frame: contains list of mobiles with AP-to-mobile frames waiting to be sent
  - node will stay awake if AP-to-mobile frames to be sent; otherwise sleep again until next beacon frame

802.11: advanced capabilities

Power Management

- node-to-AP: "I am going to sleep until next beacon frame"
  - AP knows not to transmit frames to this node
  - node wakes up before next beacon frame
- duty cycle: ON time/ON+OFF
  - 250 microseconds for waking up, similar to listen to the beacon and see whether should wake up =< 1milliseconds
  - 100 milliseconds as time between two beacons
  - <1% duty cycle

Chapter 6 outline

6.1 Introduction

Wireless

- 6.2 Wireless links, characteristics
- 6.3 IEEE 802.11 wireless LANs ("wi-fi")
- 6.4 Cellular Internet Access
  - architecture
  - standards (e.g., GSM)

Mobility

- 6.5 Principles: addressing and routing to mobile users
- 6.6 Mobile IP
- 6.7 Handling mobility in cellular networks
- 6.8 Mobility and higher-layer protocols

6.9 Summary

Components of cellular network architecture

MSC
- connects cells to wide area net
- manages call setup (more later!)
- handles mobility (more later!)

cell
- covers geographical region
- *base station* (BS) analogous to 802.11 AP
- *mobile users* attach to network through BS
- *air-interface:* physical and link layer protocol between mobile and BS

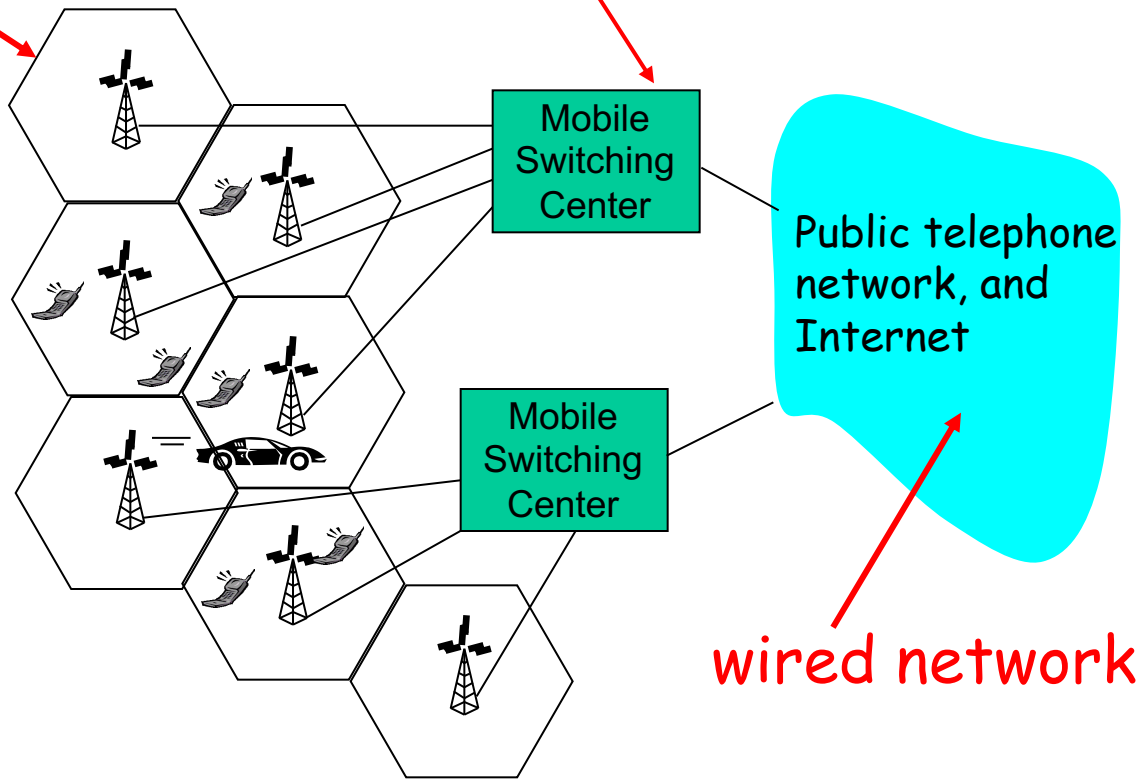

Cellular networks: the first hop

Two techniques for sharing mobile-to-BS radio spectrum

- combined FDMA/TDMA: divide spectrum in frequency channels, divide each channel into time slots
- CDMA: code division multiple access

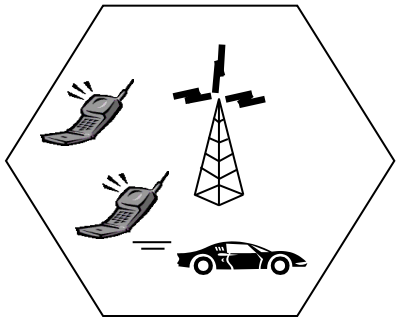

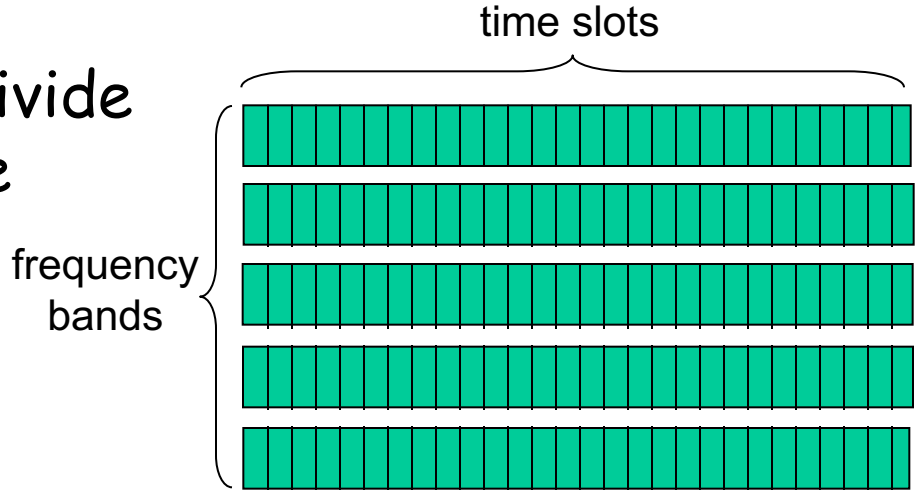

Cellular standards: brief survey

2G systems: voice channels

- IS-136 TDMA: combined FDMA/TDMA (north america)
- GSM (global system for mobile communications): combined FDMA/TDMA
  - most widely deployed
- IS-95 CDMA: code division multiple access

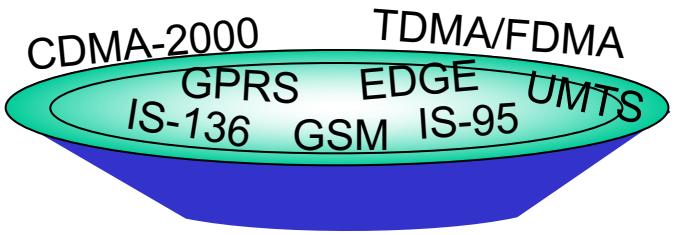

Don't drown in a bowl of alphabet soup: use this for reference only

Cellular standards: brief survey

2.5 G systems: voice and data channels

- for those who can't wait for 3G service: 2G extensions
- general packet radio service (GPRS)
  - evolved from GSM
  - data sent on multiple channels (if available)
- enhanced data rates for global evolution (EDGE)
  - also evolved from GSM, using enhanced modulation
  - data rates up to 384K
- CDMA-2000 (phase 1)
  - data rates up to 144K
  - evolved from IS-95

Code Division Multiple Access (CDMA)

As an example of more efficient access techniques which have been developed to do a better use of the available spectrum

- used in several wireless broadcast channels (cellular, satellite, etc) standards
- unique "code" assigned to each user; i.e., code set partitioning
- all users share same frequency, but each user has own "chipping" sequence (i.e., code) to encode data
- *encoded signal* = (original data) X (chipping sequence)
- *decoding:* inner-product of encoded signal and chipping sequence
- allows multiple users to "coexist" and transmit simultaneously with minimal interference (if codes are "orthogonal")

CDMA Encode/Decode

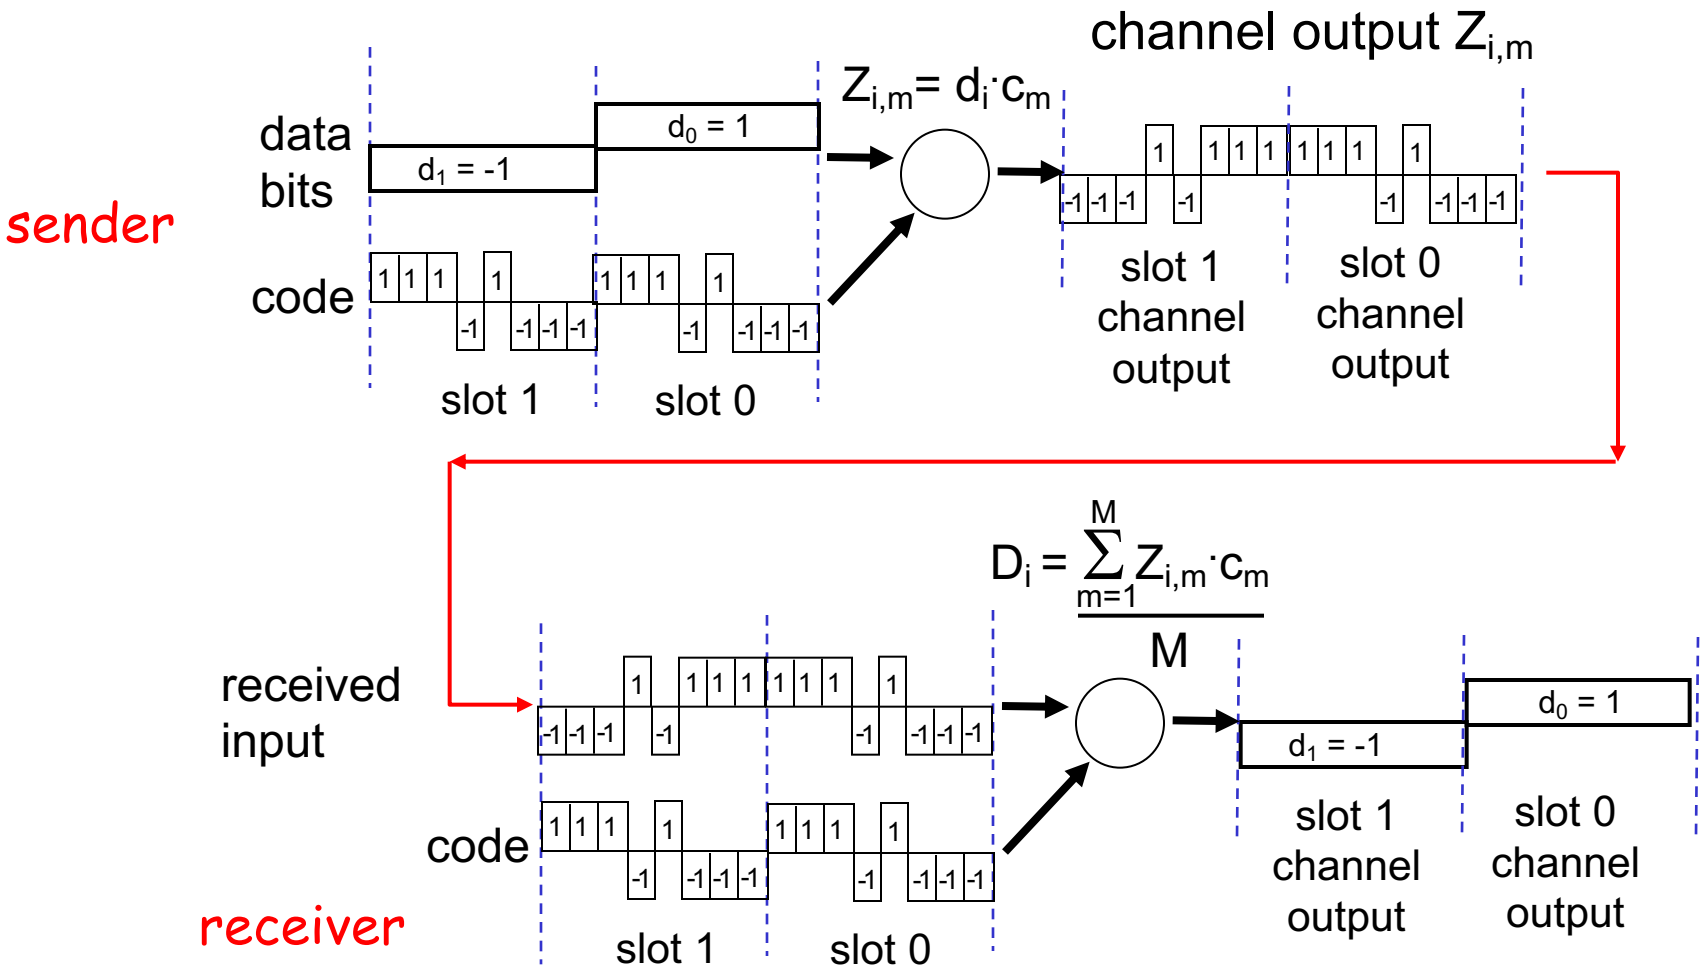

CDMA: two-sender interference

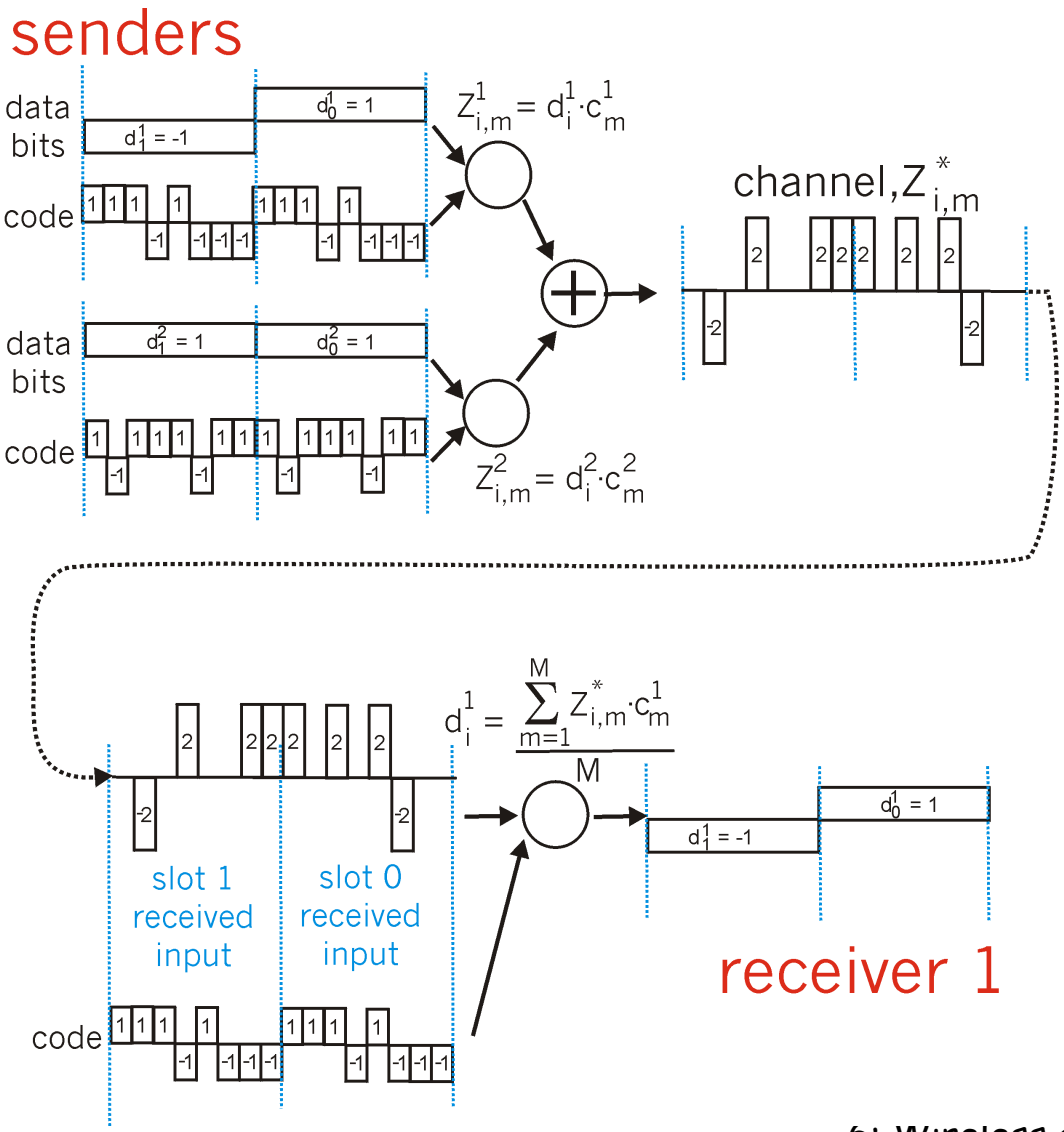

Chipping codes must be orthogonal

Other requirements such as the fact signals arrivere with comparable power

Cellular standards: brief survey

3G systems: voice/data

- Universal Mobile Telecommunications Service (UMTS)
  - data service: High Speed Uplink/Downlink packet Access (HSDPA/HSUPA): 3 Mbps
- CDMA-2000: CDMA in TDMA slots
  - data service: 1xEvolution Data Optimized (1xEVDO) up to 14 Mbps

….. more (and more interesting) cellular topics due to mobility (stay tuned for details)

2G (voice) network architecture

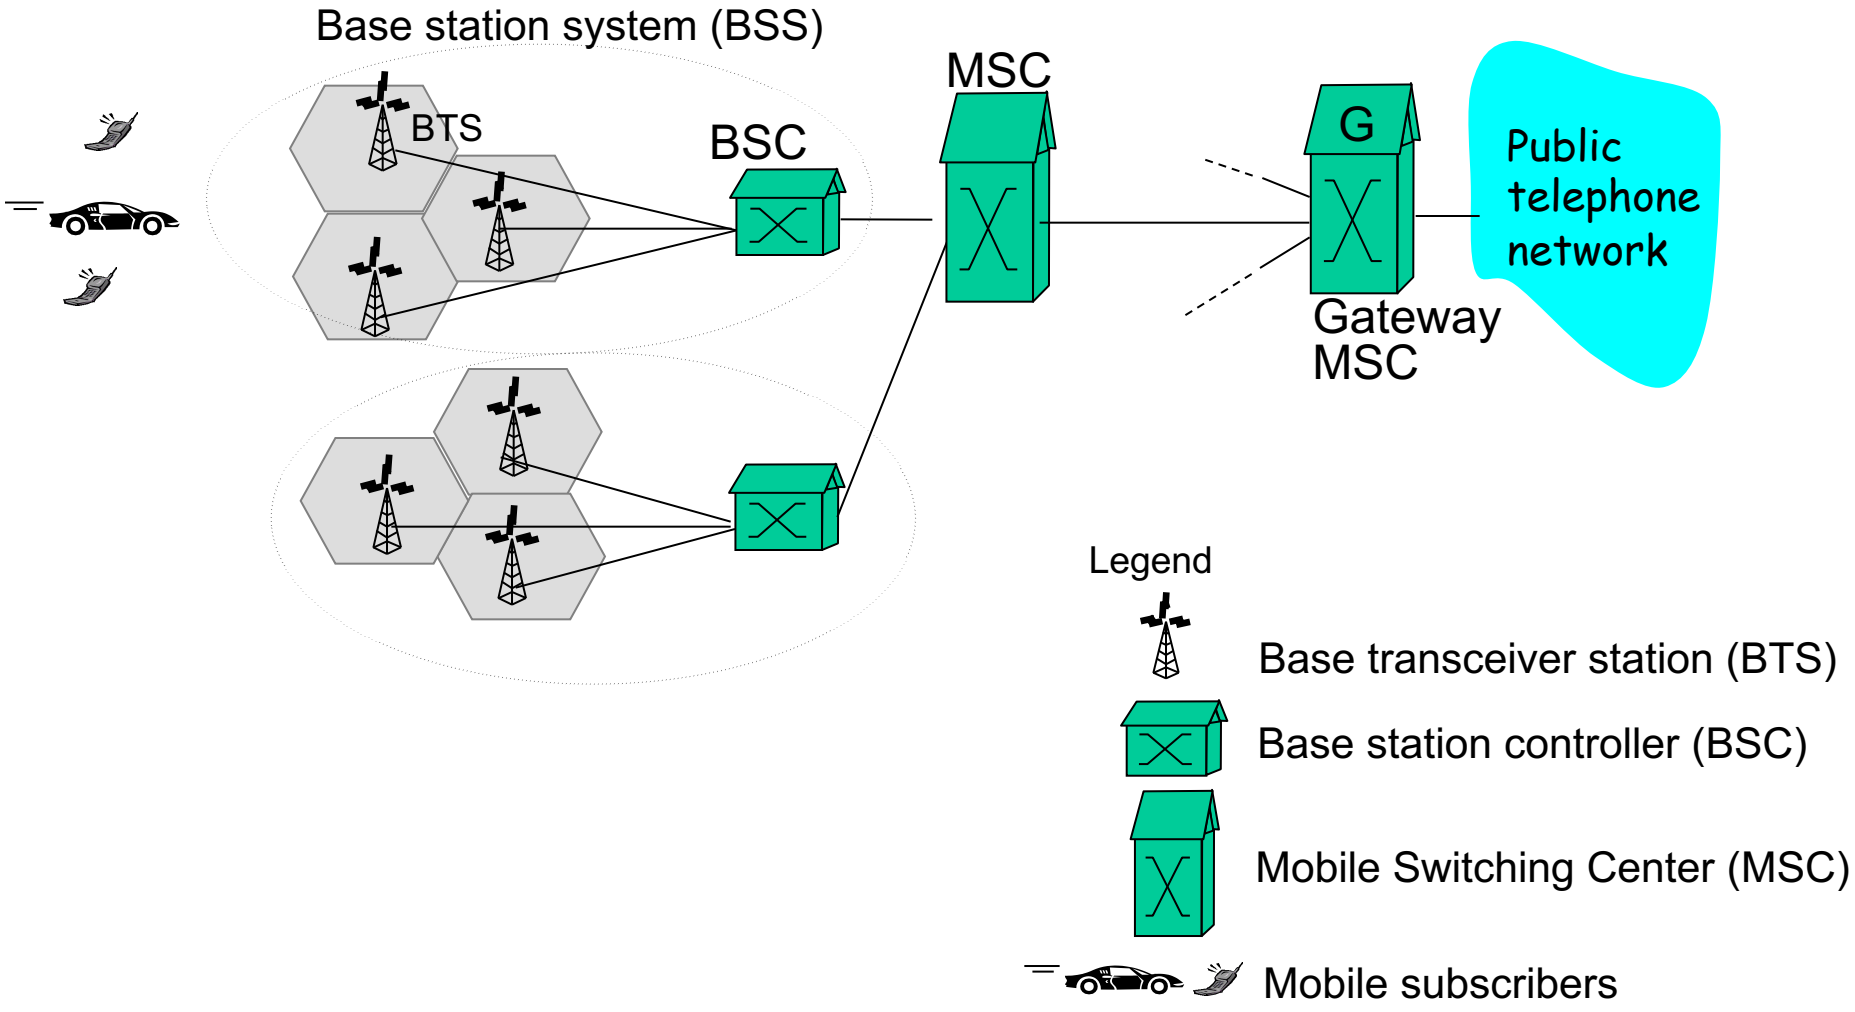

2.5G (voice+data) network architecture

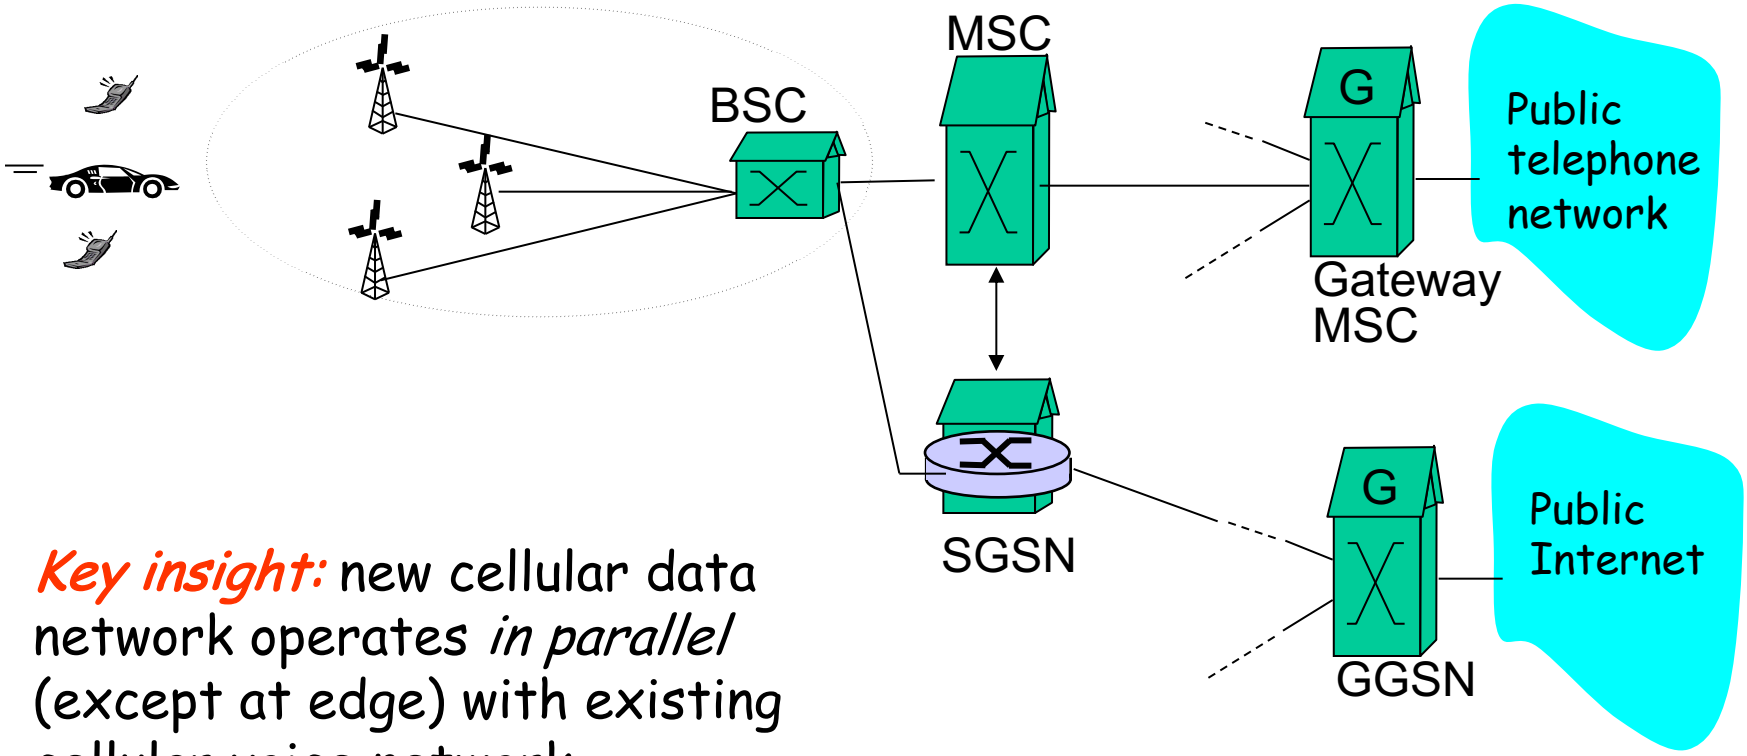

Key insight: new cellular data network operates *in parallel* (except at edge) with existing cellular voice network

- voice network unchanged in core
- data network operates in parallel


Serving GPRS Support Node (SGSN)


Gateway GPRS Support Node (GGSN)

Chapter 6 outline

6.1 Introduction

Wireless

- 6.2 Wireless links, characteristics
  - CDMA
- 6.3 IEEE 802.11 wireless LANs ("wi-fi")
- 6.4 Cellular Internet Access
  - architecture
  - standards (e.g., GSM)

- Mobility
- 6.5 Principles: addressing and routing to mobile users
- 6.6 Mobile IP
- 6.7 Handling mobility in cellular networks
- 6.8 Mobility and higher-layer protocols

- 6.9 Summary

What is mobility?

- spectrum of mobility, from the *network* perspective:

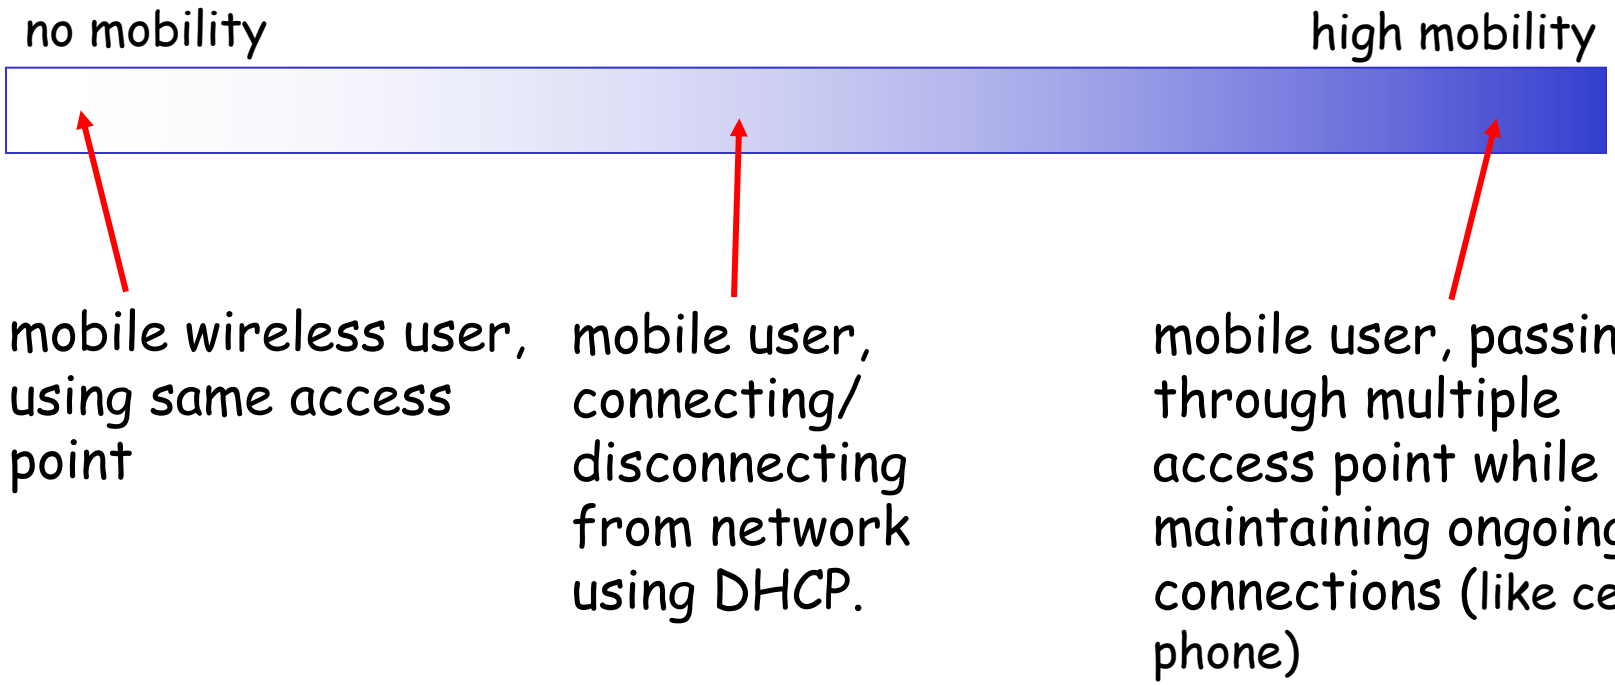

How do *you* contact a mobile friend:

Consider friend frequently changing addresses, how do you find her?

- search all phone books?
- call her parents?
- expect her to let you know where he/she is?

Mobility: approaches

- *Let routing handle it:* routers advertise permanent address of mobile-nodes in visited network via usual routing table exchange.
  - routing table indicates where each mobile located
  - no changes to end-systems
- *let end-systems handle it:*
  - *indirect routing:* communication from correspondent to mobile goes through home agent, then forwarded to remote
  - *direct routing:* correspondent gets foreign address of mobile, sends directly to mobile

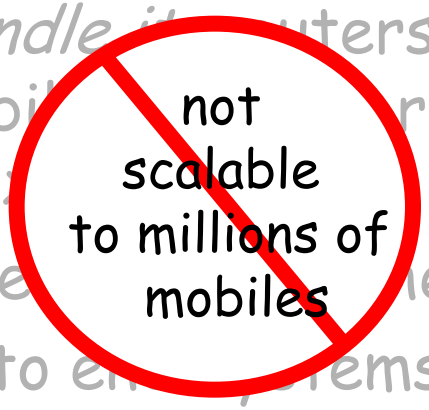

Mobility: approaches

- *Let routing handle it:* routers advertise permanent address of mobile-nodes-in-residence via usual routing table exchange.
  - routing tables indicate where each mobile located
  - no changes to end-systems
- *Let end-systems handle it:*
  - *indirect routing:* communication from correspondent to mobile goes through home agent, then forwarded to remote
  - *direct routing:* correspondent gets foreign address of mobile, sends directly to mobile

Mobility: Vocabulary

home network: permanent "home" of mobile (e.g., 128.119.40/24)

home agent: *entity that will perform mobility functions on behalf of mobile, when mobile is remote*

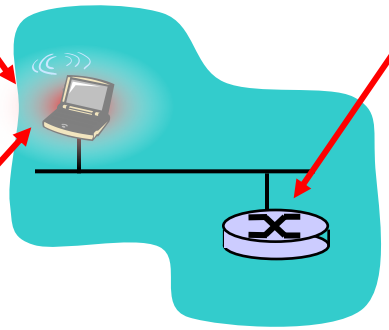

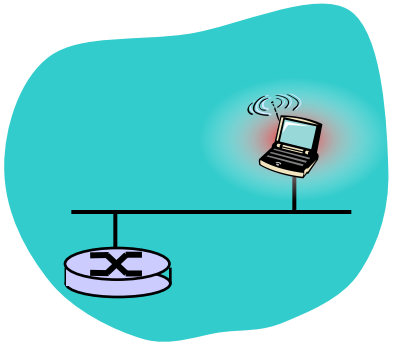

wide area network

Permanent address: address in home network, *can always* be used to reach mobile e.g., 128.119.40.186

correspondent

Mobility: more vocabulary

Permanent address: remains constant (e.g., 128.119.40.186)

visited network: network in which mobile currently resides (e.g., 79.129.13/24)

Care-of-address: address in visited network. (e.g., 79,129.13.2)

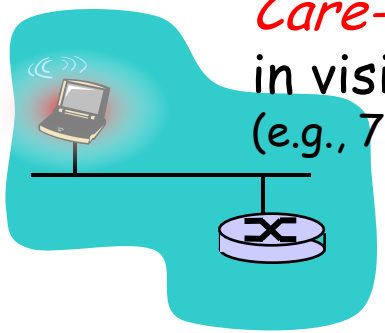

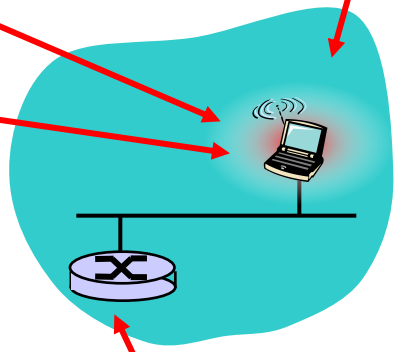

wide area network

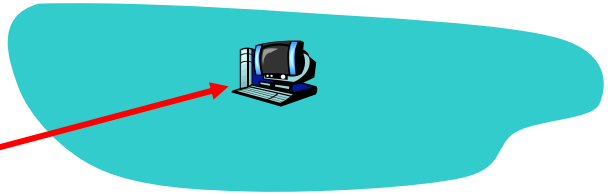

foreign agent: *entity in visited network that performs mobility functions on behalf of mobile.*

correspondent: *wants to communicate with mobile*

Mobility: registration

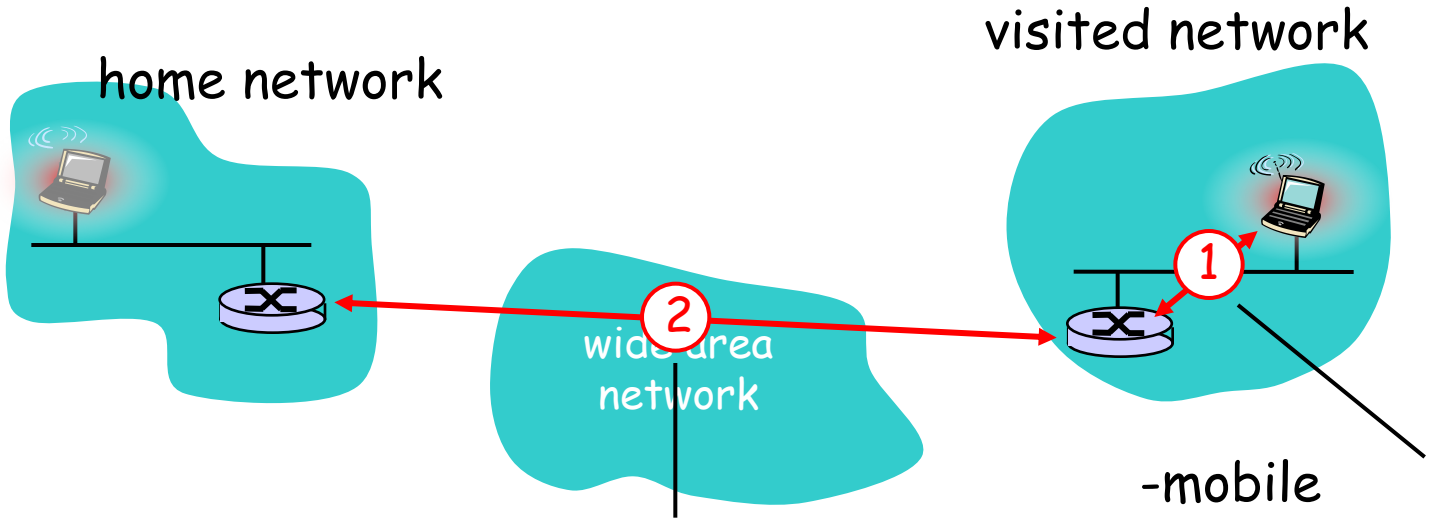

-foreign agent contacts home agent home: "this mobile is resident in my network"
-COA communicated

-mobile contacts foreign agent on entering visited network
-a Care of Address is assigned

End result:

- Foreign agent knows about mobile
- Home agent knows location of mobile

Mobility via Indirect Routing

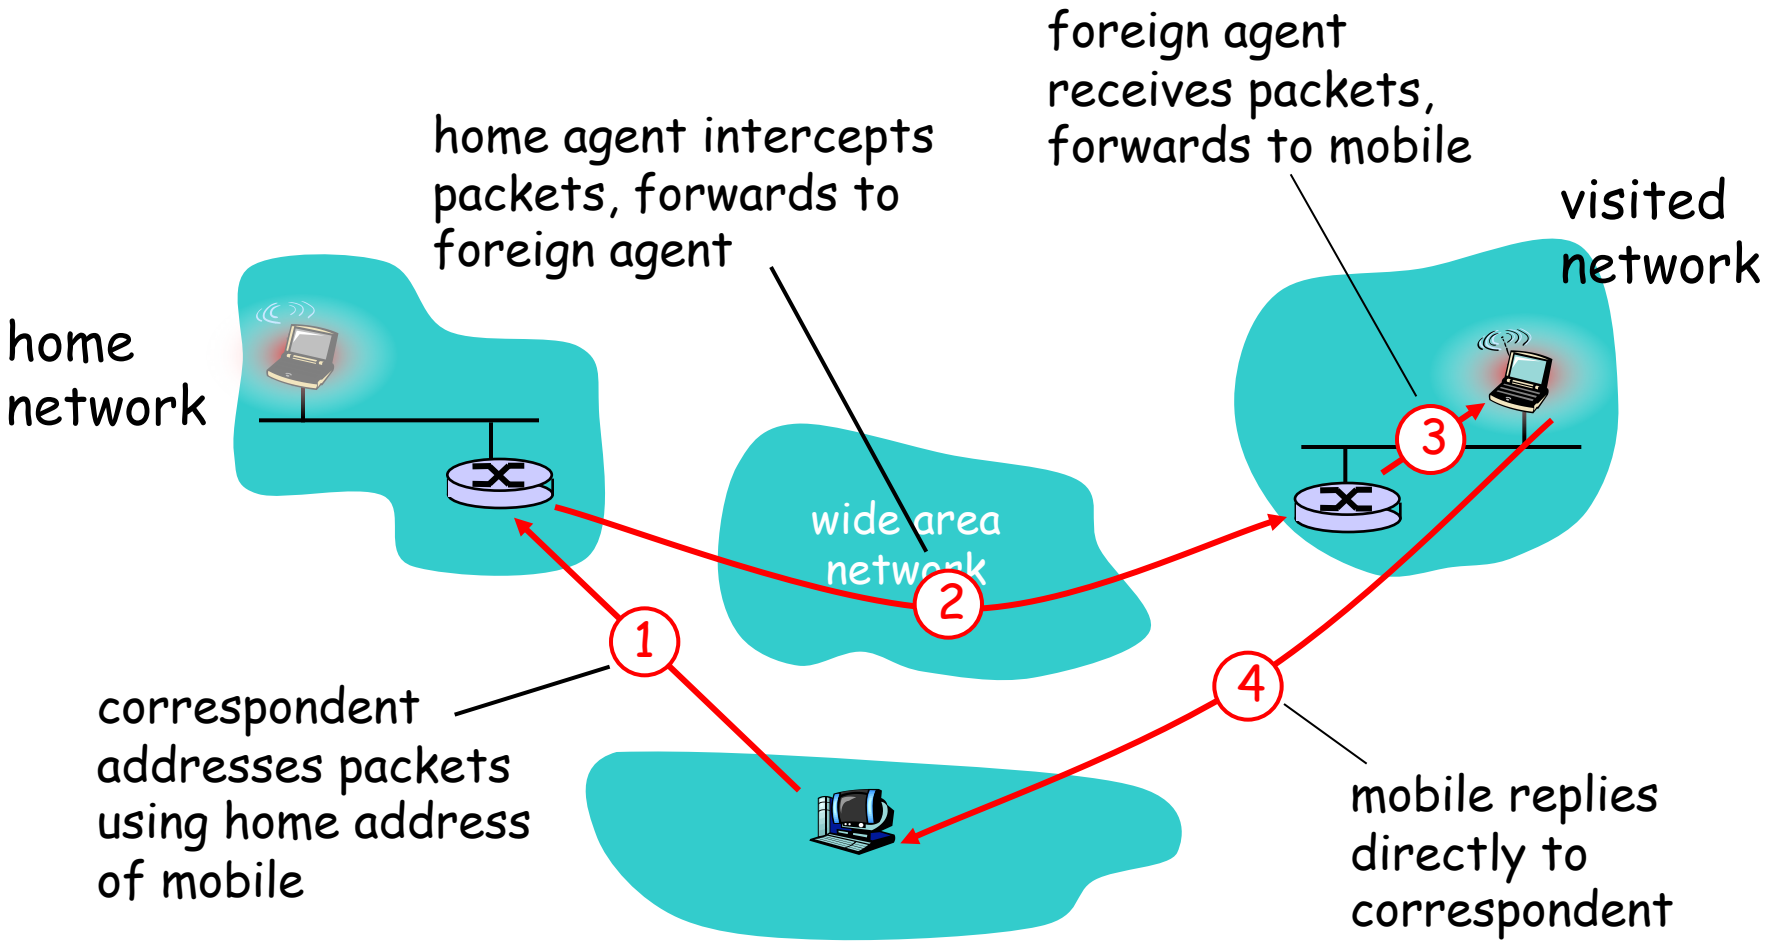

Step 2: datagram transmitted by sources is encapsulated in a datagram transmitted by the home agent to the COA

Indirect Routing: comments

- Mobile uses two addresses:
  - permanent address: used by correspondent (hence mobile location is *transparent* to correspondent)
  - care-of-address: used by home agent to forward datagrams to mobile
- foreign agent functions may be done by mobile itself
- triangle routing: correspondent-home-network-mobile
  - inefficient when
  - correspondent, mobile
  - are in same network

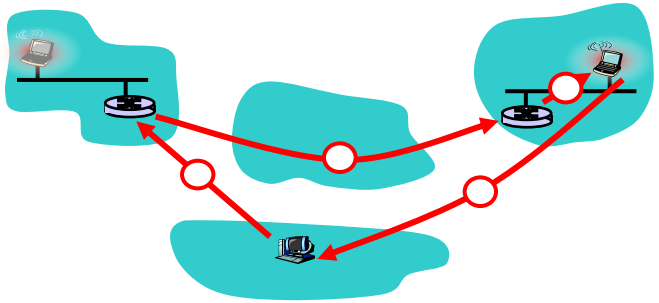

Indirect Routing: moving between networks

- suppose mobile user moves to another network
  - registers with new foreign agent
  - new foreign agent registers with home agent
  - home agent update care-of-address for mobile
  - packets continue to be forwarded to mobile (but with new care-of-address)
- mobility, changing foreign networks transparent: *on going connections can be maintained!*

Mobility via Direct Routing

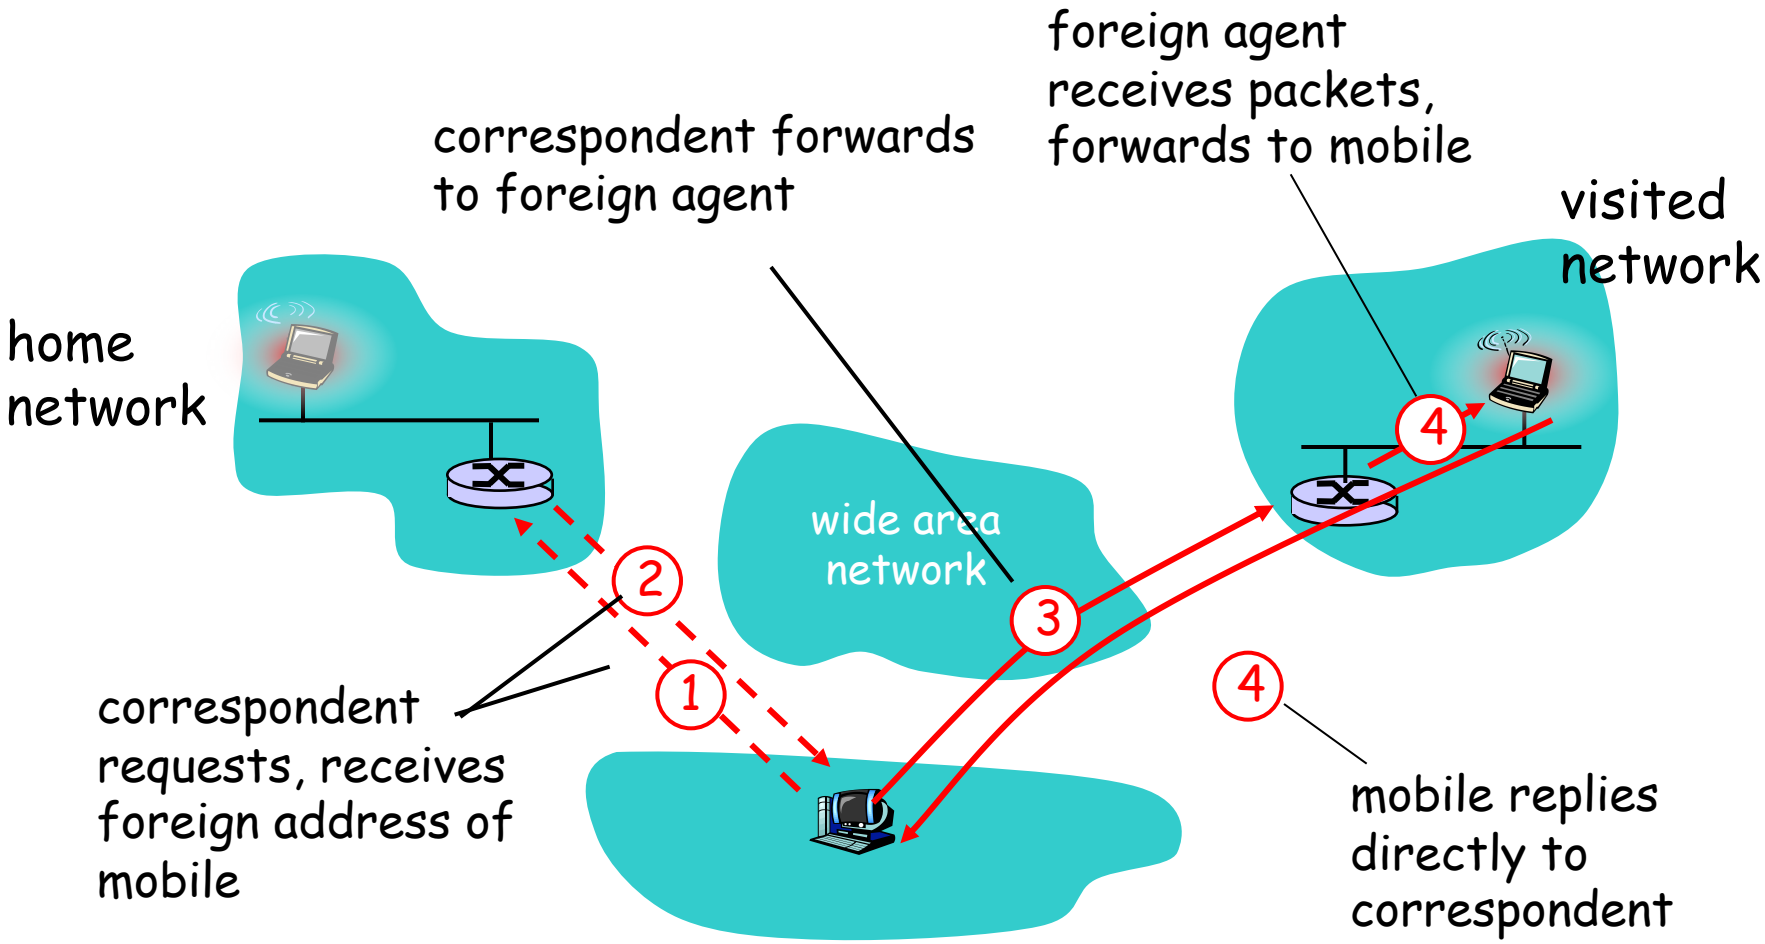

Mobility via Direct Routing

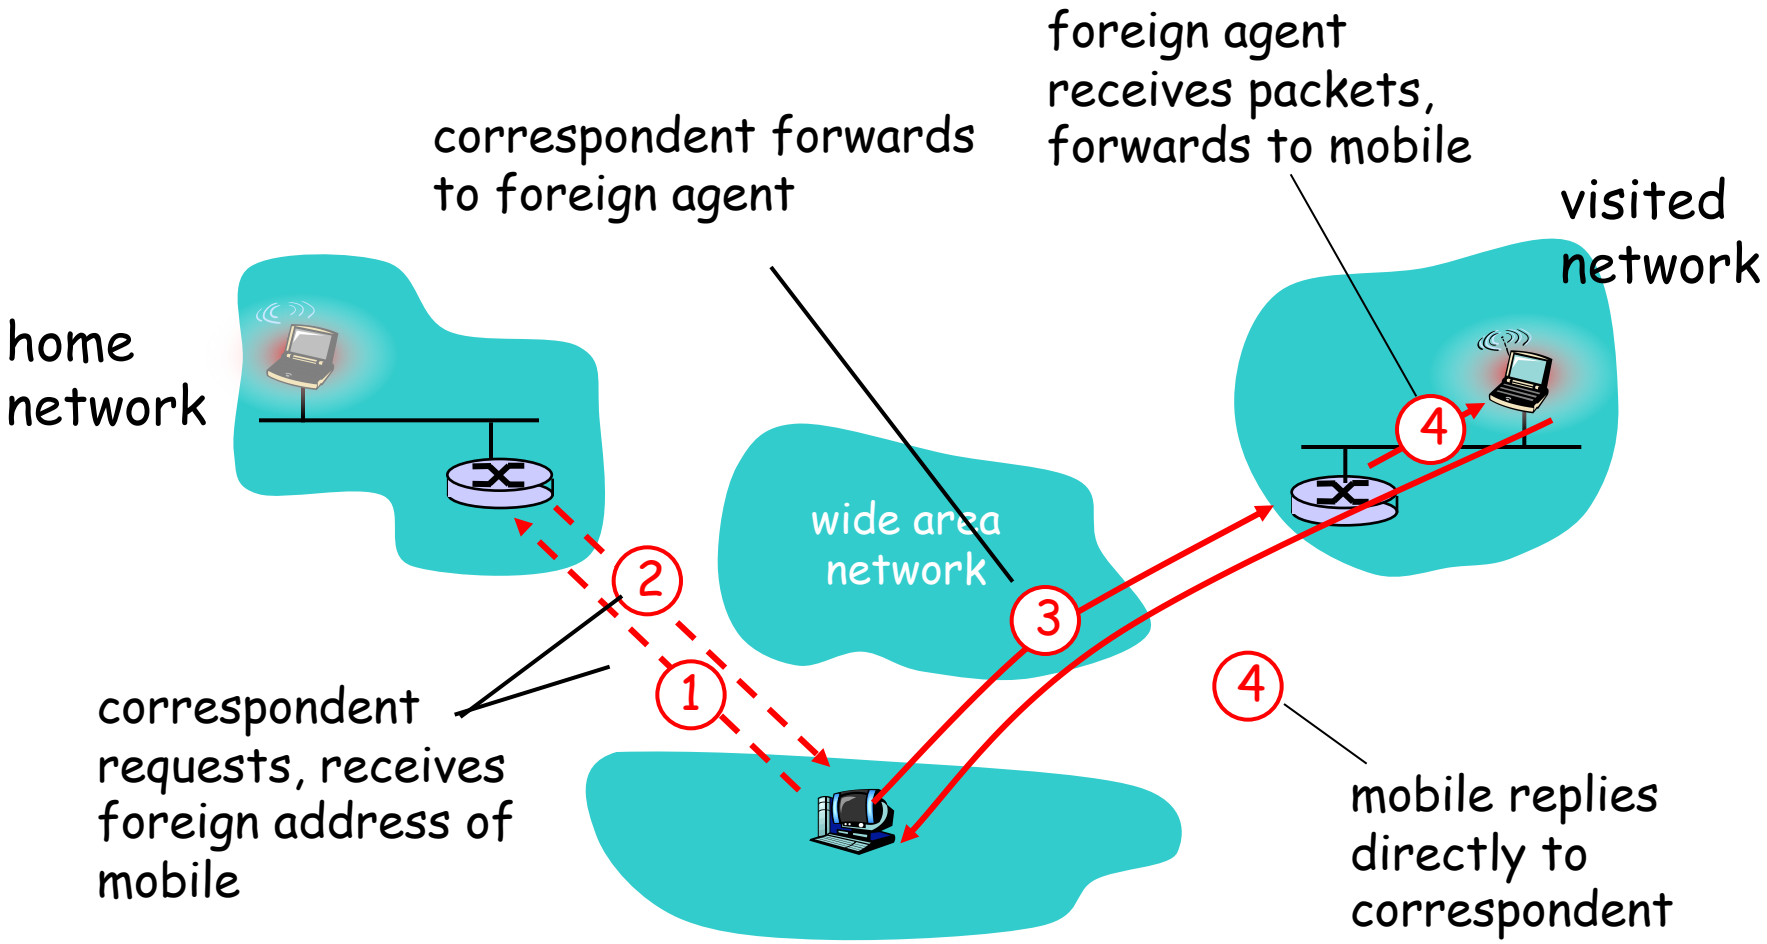

Mobility via Direct Routing: comments

- overcome triangle routing problem
- non-transparent to correspondent: correspondent must get care-of-address from home agent
  - what if mobile changes visited network?

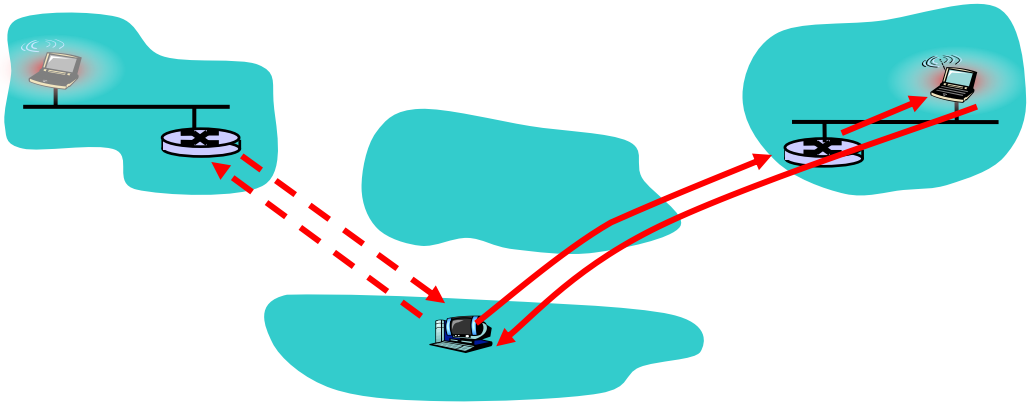

Accommodating mobility with direct routing

- anchor foreign agent: FA in first visited network
- data always routed first to anchor FA
- when mobile moves: new FA arranges to have data forwarded from old FA (chaining)

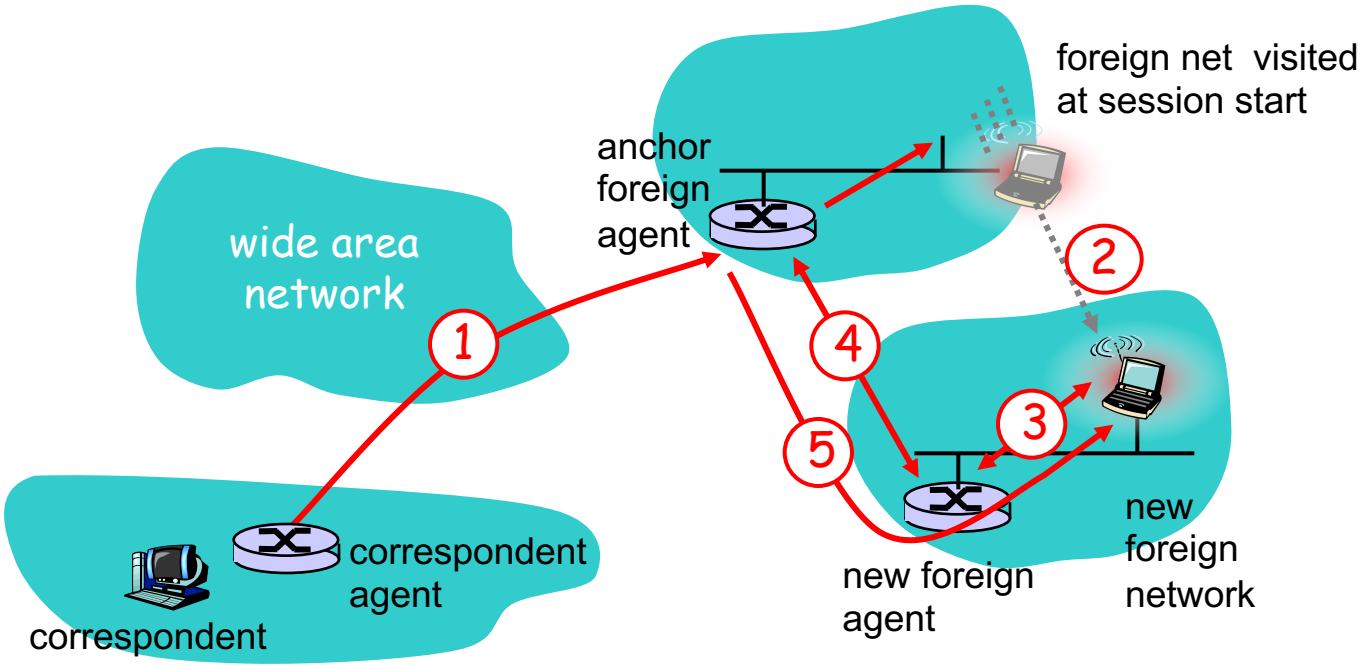

Chapter 6 outline

6.1 Introduction

Wireless

- 6.2 Wireless links, characteristics
  - CDMA
- 6.3 IEEE 802.11 wireless LANs ("wi-fi")
- 6.4 Cellular Internet Access
  - architecture
  - standards (e.g., GSM)

- Mobility
- 6.5 Principles: addressing and routing to mobile users
- 6.6 Mobile IP
- 6.7 Handling mobility in cellular networks
- 6.8 Mobility and higher-layer protocols

- 6.9 Summary

Mobile IP

- RFC 3344
- has many features we've seen:
  - home agents, foreign agents, foreign-agent registration, care-of-addresses, encapsulation (packet-within-a-packet)
- three components to standard:
  - indirect routing of datagrams
  - agent discovery
  - registration with home agent

Mobile IP: indirect routing

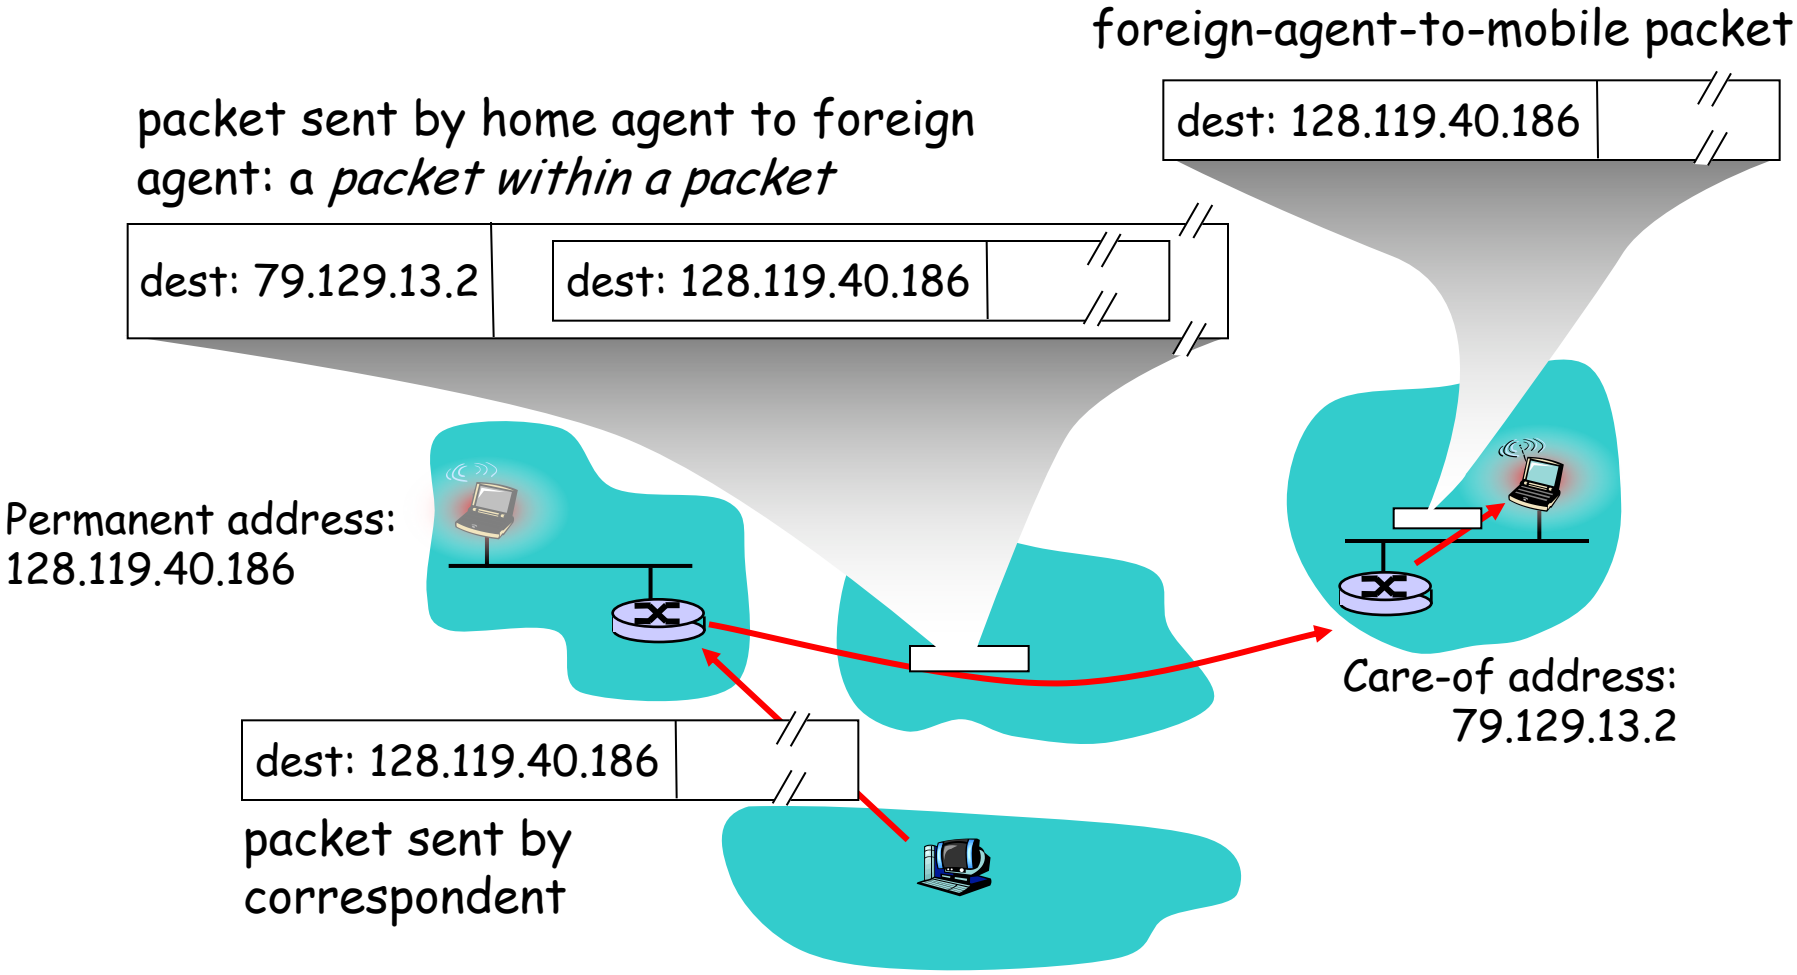

Mobile IP: agent discovery

- agent advertisement: foreign/home agents advertise service by broadcasting ICMP messages (typefield = 9)

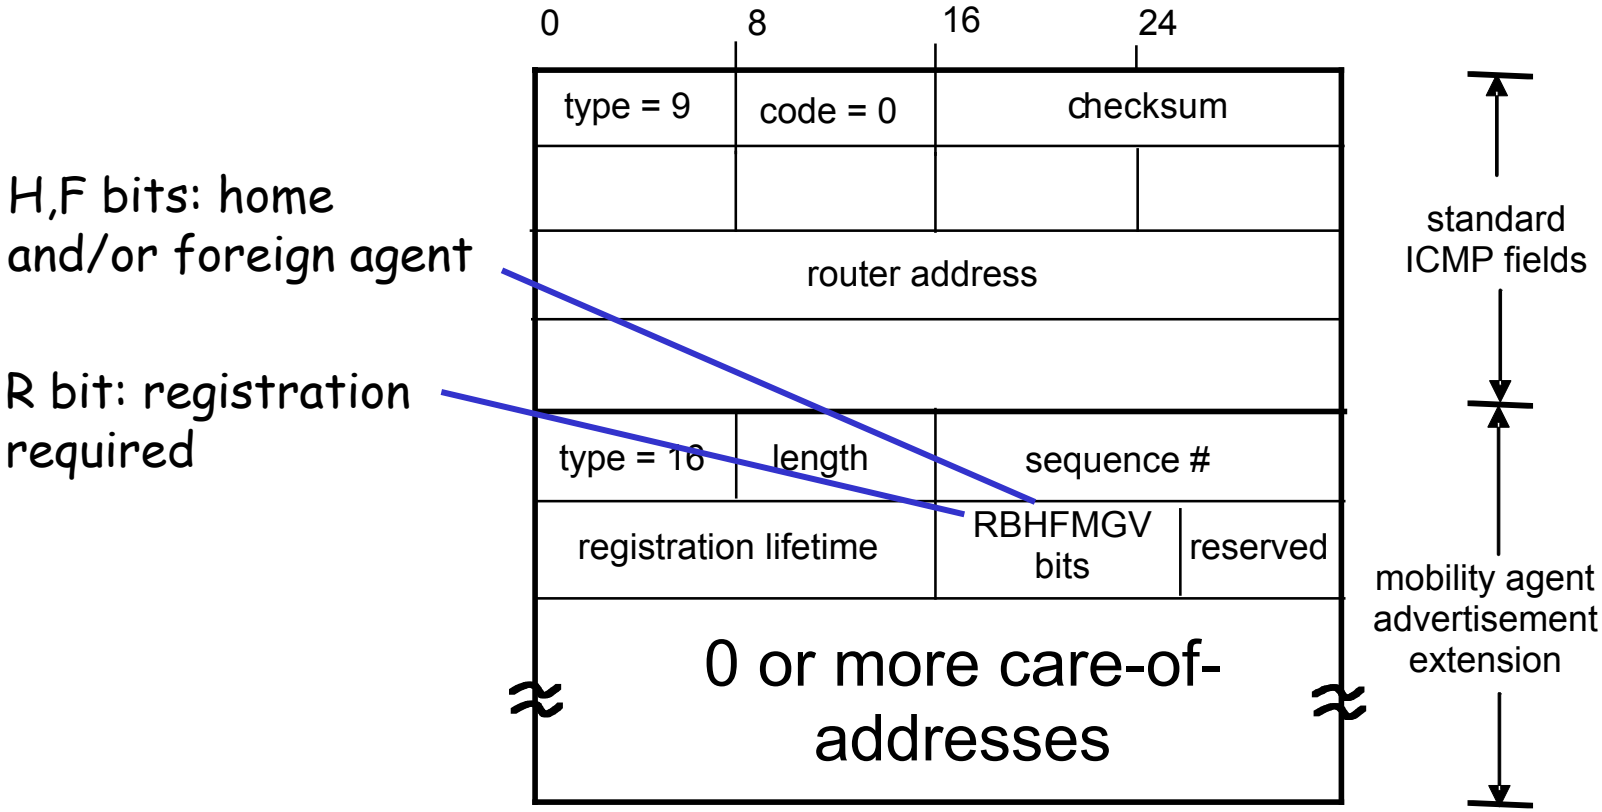

Mobile IP: registration example

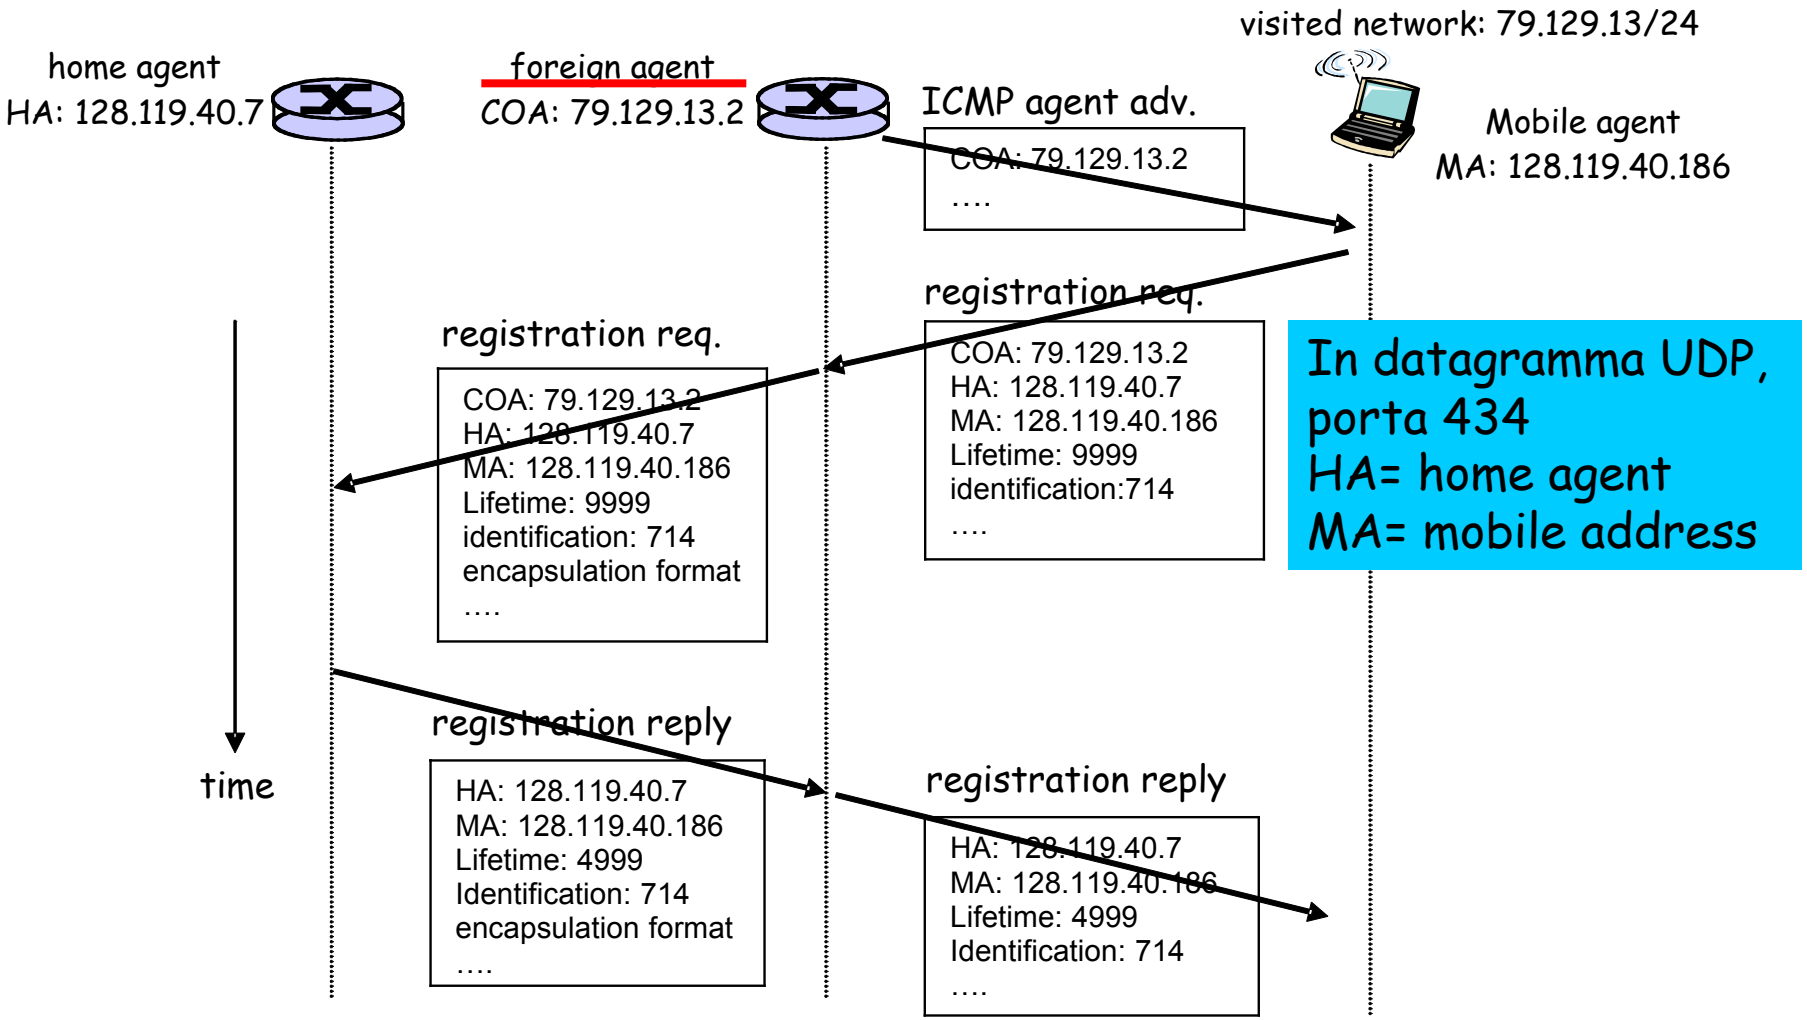

Components of cellular network architecture

recall:

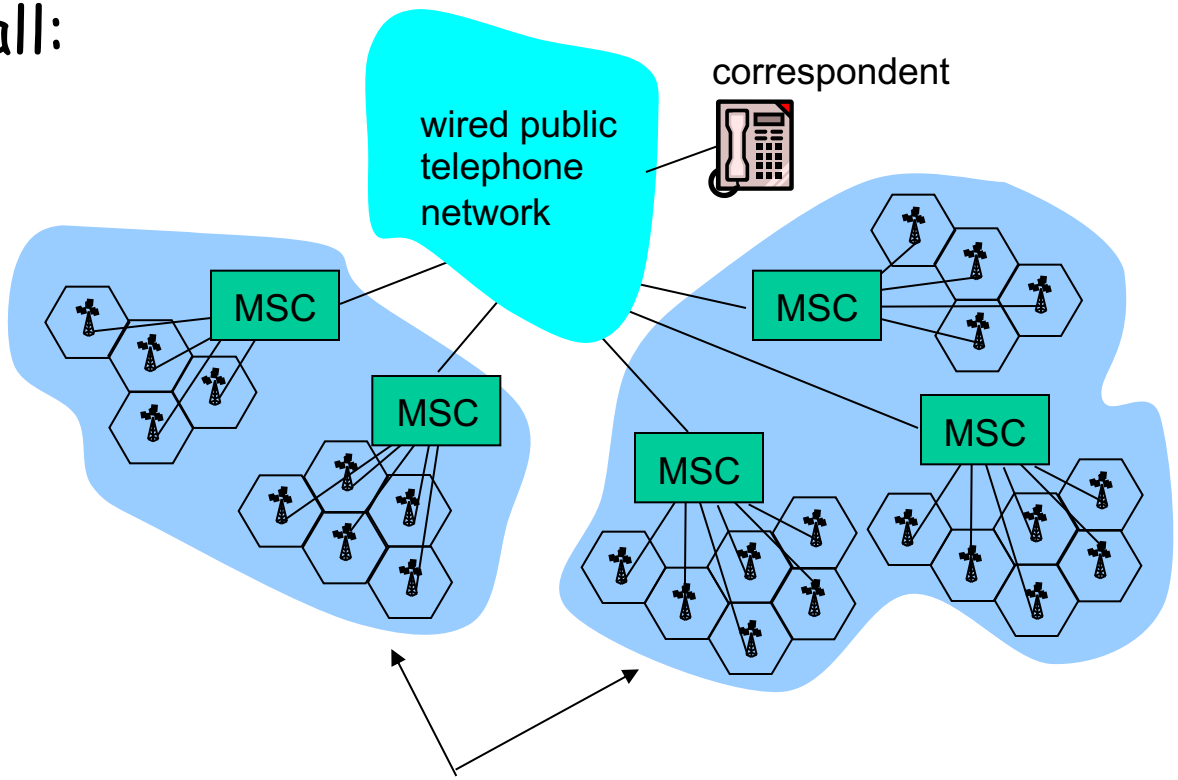

Handling mobility in cellular networks

- *home network:* network of cellular provider you subscribe to (e.g., Sprint PCS, Verizon)
  - *home location register (HLR):* database in home network containing permanent cell phone #, profile information (services, preferences, billing), information about current location (could be in another network)
- *visited network:* network in which mobile currently resides
  - *visitor location register (VLR):* database with entry for each user currently in network
  - could be home network

GSM: indirect routing to mobile

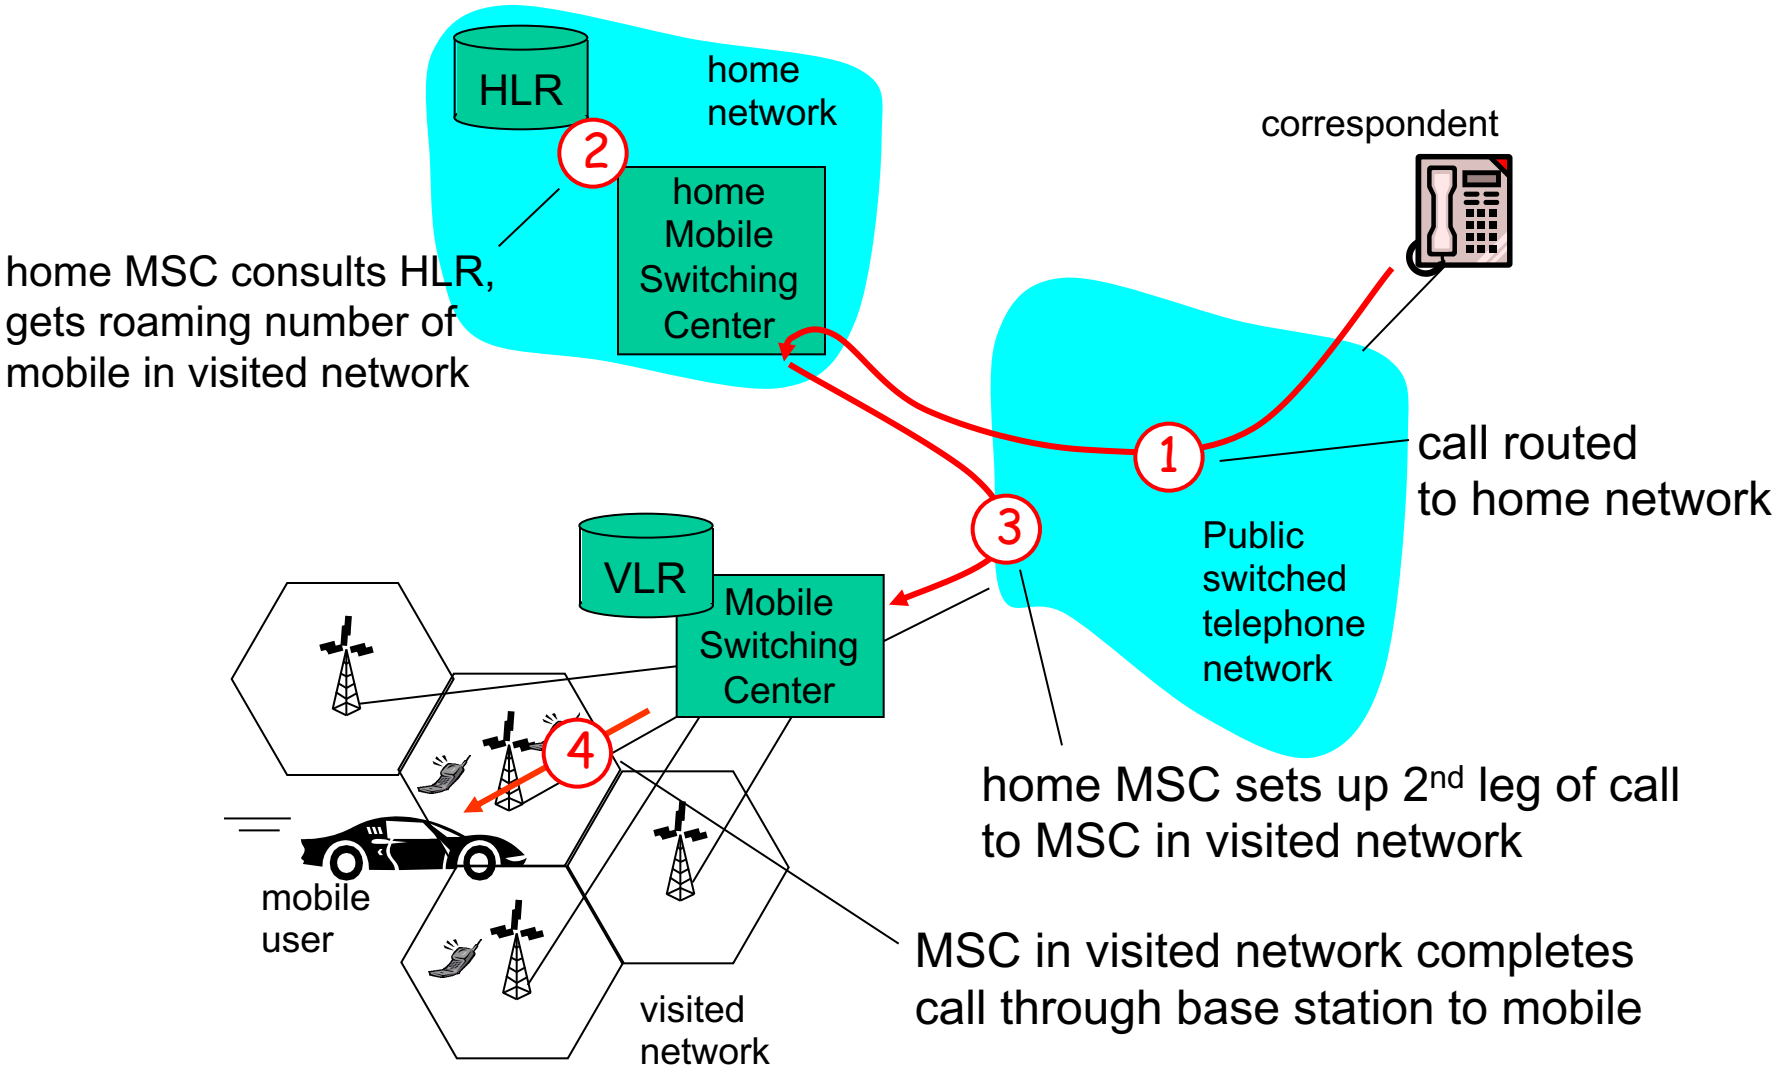

GSM: indirect routing to mobile

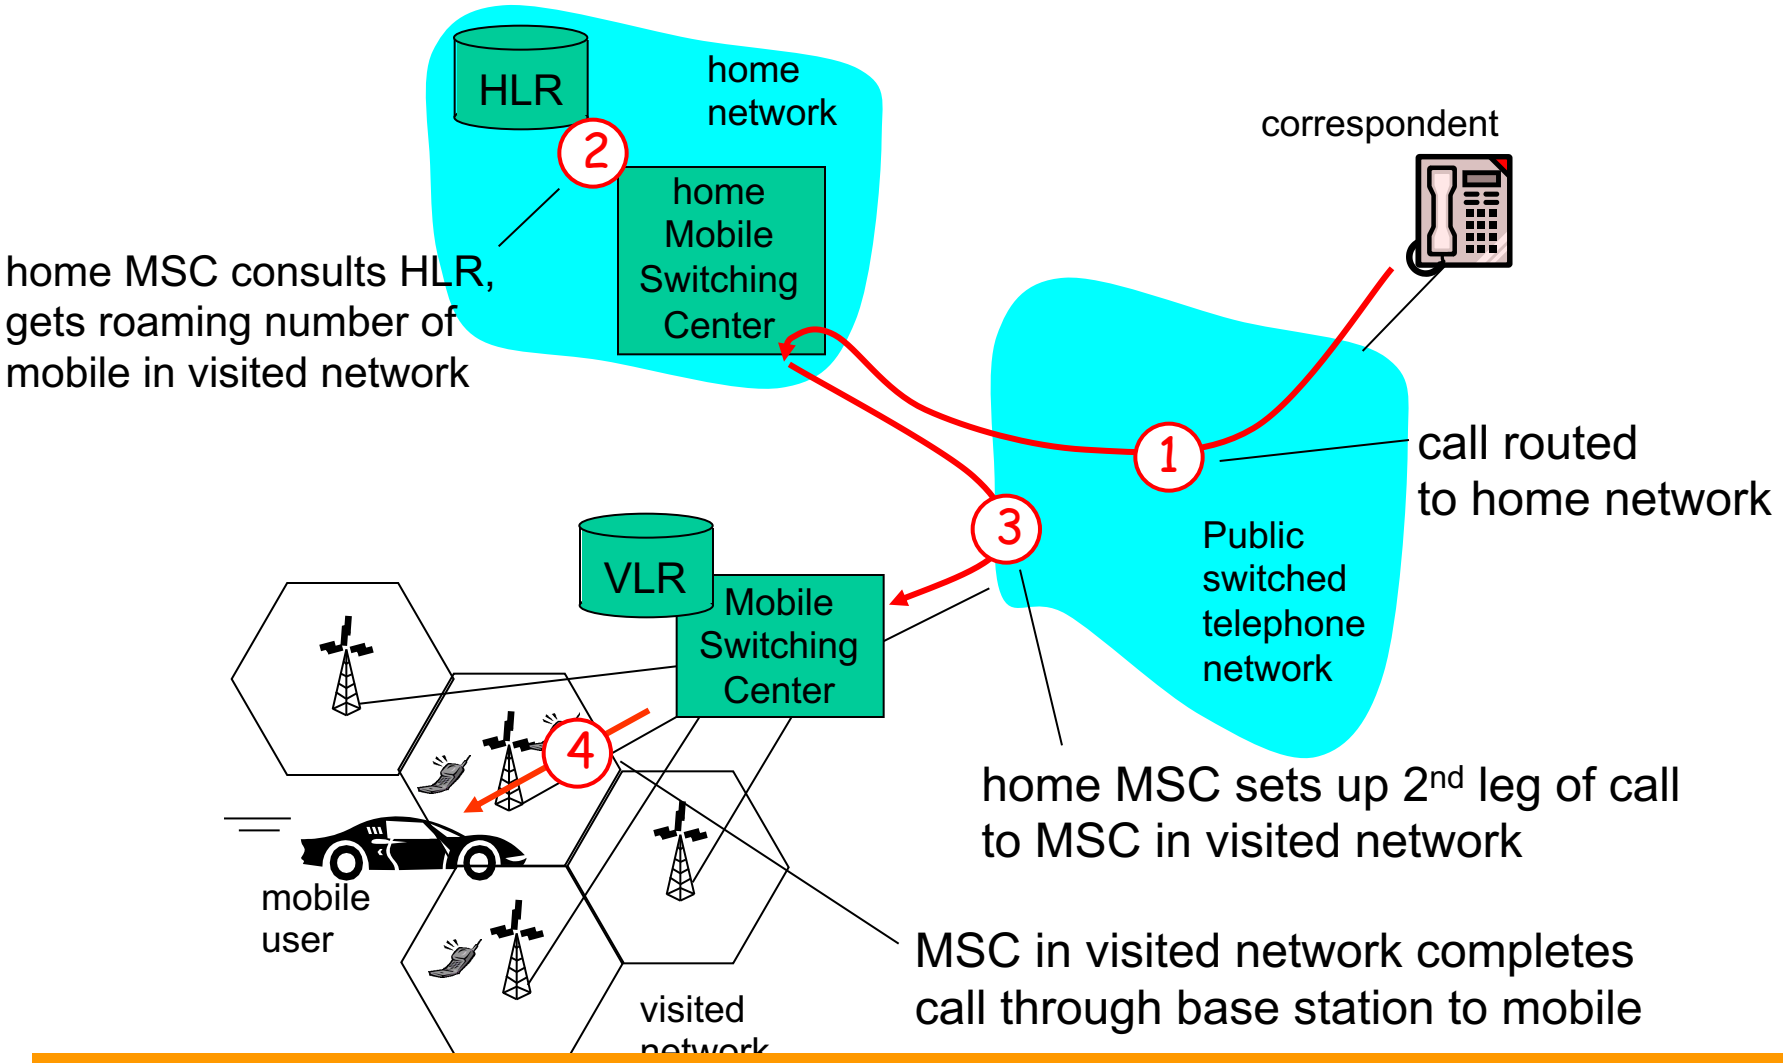

When MU switches on cell in the new network must register with VLR which communicates affiliation to HLR

GSM: handoff with common MSC

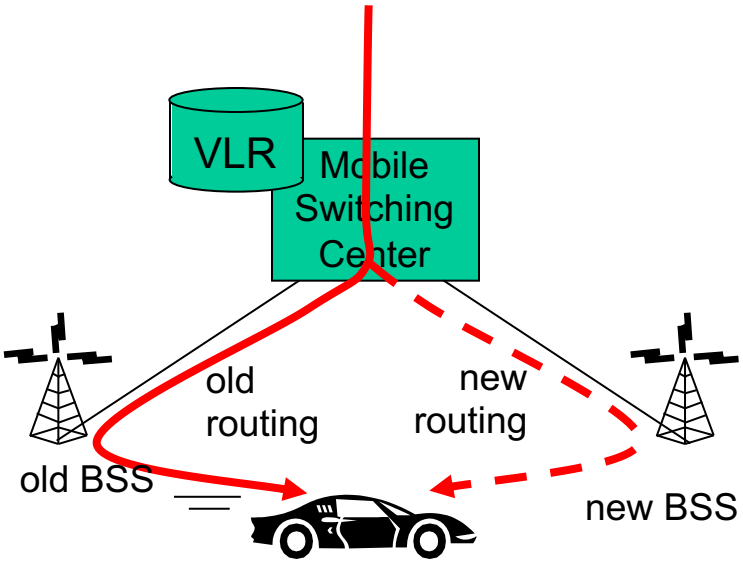

- Handoff goal: route call via new base station (without interruption)
- reasons for handoff:
  - stronger signal to/from new BSS (continuing connectivity, less battery drain)
  - load balance: free up channel in current BSS
  - GSM doesn't mandate why to perform handoff (policy), only how (mechanism)
- handoff initiated by old BSS

GSM: handoff with common MSC

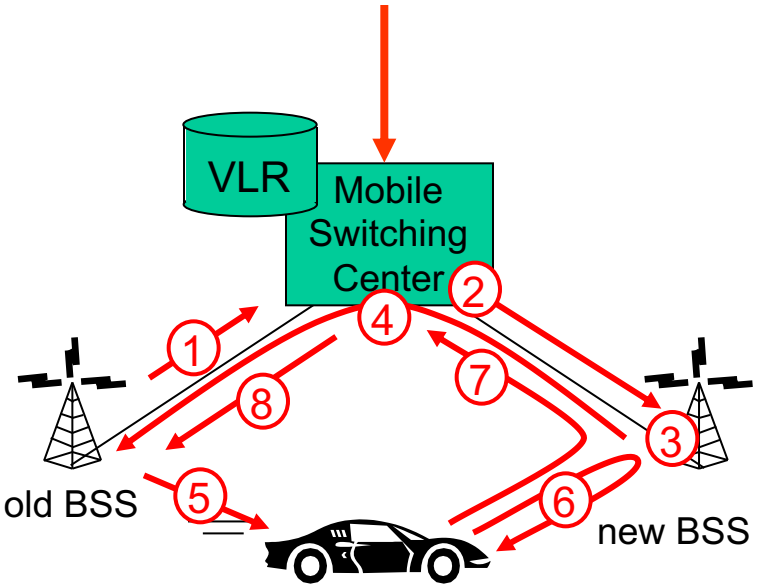

1. old BSS informs MSC of impending handoff, provides list of 1+ new BSSs
2. MSC sets up path (allocates resources) to new BSS
3. new BSS allocates radio channel for use by mobile
4. new BSS signals MSC, old BSS: ready
5. old BSS tells mobile: perform handoff to new BSS
6. mobile, new BSS signal to activate new channel
7. mobile signals via new BSS to MSC: handoff complete. MSC reroutes call

8 MSC-old-BSS resources released

GSM: handoff between MSCs

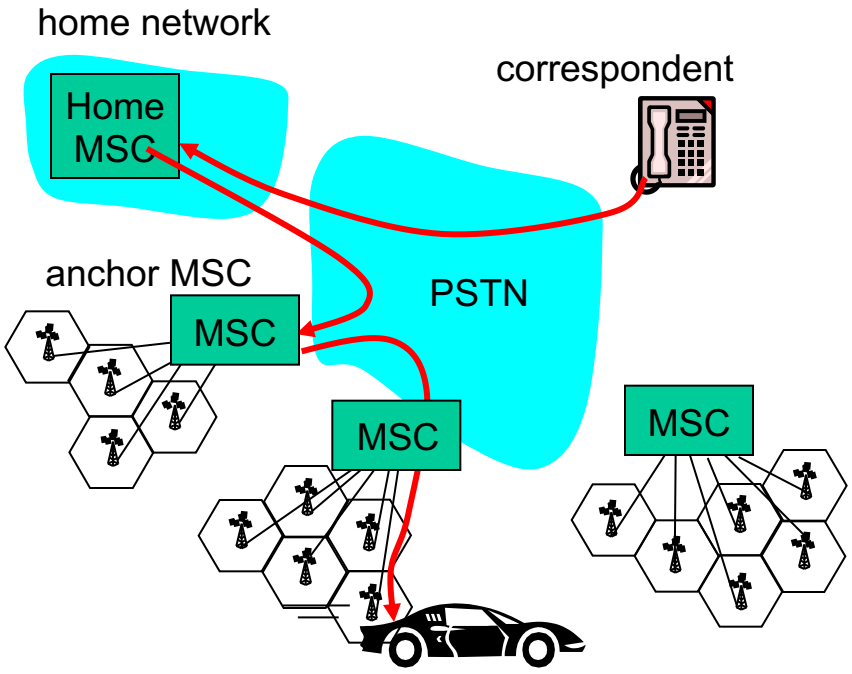

(a) before handoff

- *anchor MSC:* first MSC visited during call
  - call remains routed through anchor MSC
- new MSCs add on to end of MSC chain as mobile moves to new MSC
- IS-41 allows optional path minimization step to shorten multi-MSC chain

GSM: handoff between MSCs

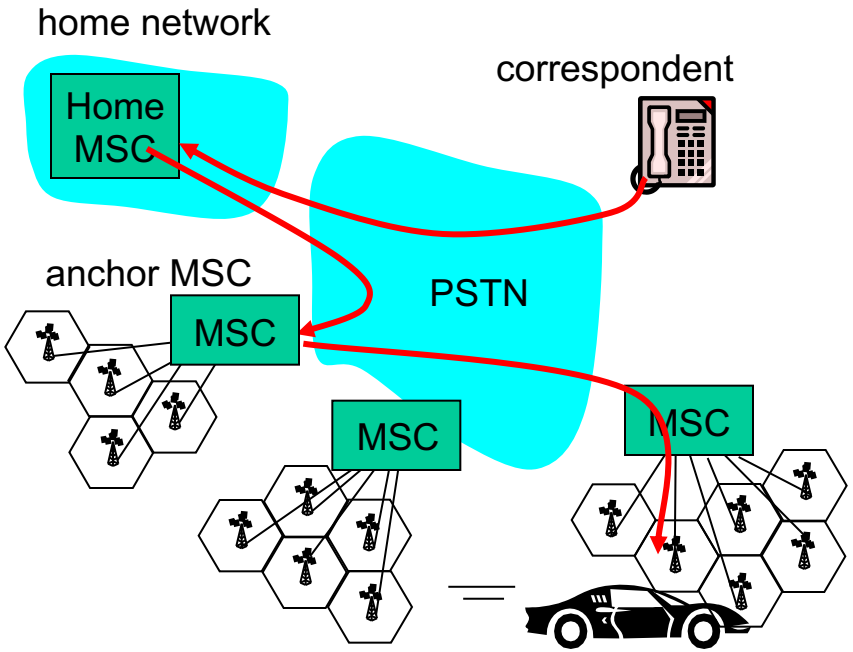

(b) after handoff

- *anchor MSC:* first MSC visited during call
  - call remains routed through anchor MSC
- new MSCs add on to end of MSC chain as mobile moves to new MSC
- IS-41 allows optional path minimization step to shorten multi-MSC chain