

Project 1: Thermal Storage Design with PINNs



AI in the Sciences and Engineering
Due date: April 12th, 2024

Training and testing data can be found on the Moodle page: <https://moodle-app2.let.ethz.ch/course/view.php?id=22389>

IMPORTANT INFORMATION

To get ECTS credits for the course you need to submit and obtain a passing grade on **each** of the **three** projects, which are to be completed **individually**. Submitting these projects is the only form of assessment for the course - there are no group projects this year.

This document describes the **first** project. The due date for this project is **12 April 2024**.

The remaining two projects are scheduled to be released on 19 April and 24 May (but these dates may change slightly depending on lecture progress). These projects will also have due dates four weeks after they are released.

This project consists of three tasks on different topics. For each task, you will be asked to train a learning model and provide predictions on a testing set. **The final submission consists of the predictions files, the code and a report of maximum 2000 characters per task** where you should succinctly describe the procedure followed in each task. The submissions have to be collected in a zip folder named as *yourfirstname_yoursecondname_yourleginumber.zip*.

Bonus system

- Each project will have its own **bonus, optional** question – you can get full marks on the project (6/6) without touching it.
- Each such question will be scored from 0 to 100 – due to this question being open-ended, we will decide on what a 'reasonable attempt' is based on the submissions of **all** students.
- Getting at least a 'reasonable attempt' on **all** bonus questions across **all** projects will earn you a final grade bonus of 0.5. Note the final grade is still capped at 6.

Project Description

The main objective of the project is to apply machine learning algorithms to solve various tasks related to the preliminary design of a *thermal energy storage*.

The device is used in solar power plants to store thermal energy during the *charging phase* and release it for production of electricity during the *discharging phase*. The thermal energy is stored due to the interaction of a fluid and a solid phase. During the charging state the fluid is injected at high temperature from one end of the storage and heats the solid up. In contrast, during the discharging phase the reverse process occurs: cold fluid flows from the opposite end and absorbs heat from the solid. Between charging and discharging *idle phases* take place, where no fluid enters the thermal storage.

Therefore, at any instant of time the thermal storage can be in one of the following states:

1. Charging;
2. Idle between charging and discharging;
3. Discharging;
4. Idle between discharging and charging;

Together the four states establish a *cycle* and the same process is repeated for several cycles until the thermal storage reaches a periodic or stationary regime.

Mathematical Model

The thermal storage is modeled by a cylinder with length L and diameter D and it is assumed that temperature variation occurs only along the axis of the cylinder (see Figure 1 for a schematic representation of the thermal storage).

The temperature evolution of the solid and fluid phases, T_s and T_f , is described by a system of two linear *reaction-convection-diffusion* equations:

$$\begin{aligned} \varepsilon \rho_f C_f \frac{\partial T_f}{\partial t} + \varepsilon \rho_f C_f u_f(t) \frac{\partial T_f}{\partial x} &= \lambda_f \frac{\partial^2 T_f}{\partial x^2} - h_v(T_f - T_s) \quad x \in [0, L], \quad t \in [0, T], \\ (1 - \varepsilon) \rho_s C_s \frac{\partial T_s}{\partial t} &= \lambda_s \frac{\partial^2 T_s}{\partial x^2} + h_v(T_f - T_s) \quad x \in [0, L], \quad t \in [0, T], \end{aligned} \quad (1)$$

with ρ being the density of the phases, C the specific heat, λ the diffusivity, ε the solid porosity, u_f the fluid velocity entering the thermal storage and h_v the heat exchange coefficient between solid and fluid. The fluid velocity is assumed to be uniform along the cylinder and varying only in time: $u_f = u$ during charging, $u = 0$ during idle and $u_f = -u$ during discharging, with u being a positive constant.

The system of equations has to be augmented with suitable initial and boundary conditions:

$$T_f(x, t = 0) = T_s(x, t = 0) = T_0, \quad x \in [0, L] \quad (2)$$

$$\left. \frac{\partial T_s(x, t)}{\partial x} \right|_{x=0} = \left. \frac{\partial T_s(x, t)}{\partial x} \right|_{x=L} = 0, \quad t \in [0, T] \quad (3)$$

The boundary conditions for the fluid instead will be different according to the current state of the thermal storage:

- **Charging State:**

$$T_f(0, t) = T_{hot}, \quad \left. \frac{\partial T_f(x, t)}{\partial x} \right|_{x=L} = 0, \quad t \in [0, T] \quad (4)$$

- **Discharging State:**

$$\left. \frac{\partial T_f(x, t)}{\partial x} \right|_{x=0} = 0, \quad T_f(L, t) = T_{cold}, \quad t \in [0, T] \quad (5)$$

- **Idle Phase:**

$$\left. \frac{\partial T_f(x, t)}{\partial x} \right|_{x=0} = 0, \quad \left. \frac{\partial T_f(x, t)}{\partial x} \right|_{x=L} = 0, \quad t \in [0, T] \quad (6)$$

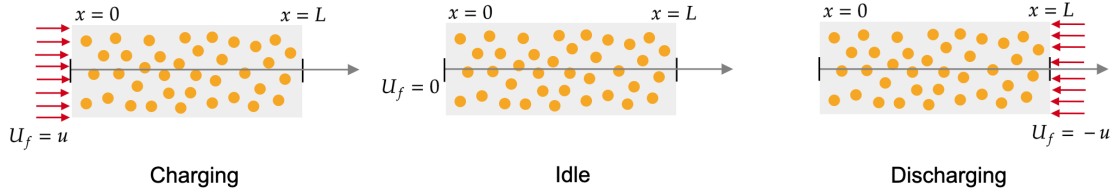


Figure 1: Schematic representation of the thermal storage

Task 1: PINNs for solving PDEs

In this task we aim at solving the system of equations 1 with physics informed neural networks. In particular we are interested in the solution of the system during the charging phase of the first cycle.

To this end, consider the *non-dimensional* set of equations:

$$\begin{aligned} \frac{\partial \bar{T}_f}{\partial t} + U_f \frac{\partial \bar{T}_f}{\partial x} &= \alpha_f \frac{\partial^2 \bar{T}_f}{\partial x^2} - h_f(\bar{T}_f - \bar{T}_s) \quad x \in [0, 1], \quad t \in [0, 1], \\ \frac{\partial \bar{T}_s}{\partial t} &= \alpha_s \frac{\partial^2 \bar{T}_s}{\partial x^2} + h_s(\bar{T}_f - \bar{T}_s) \quad x \in [0, 1], \quad t \in [0, 1], \end{aligned} \quad (7)$$

with the following initial and boundary conditions:

$$\begin{aligned} \bar{T}_f(x, t=0) &= \bar{T}_s(x, t=0) = T_0, \quad x \in [0, 1], \\ \frac{\partial \bar{T}_s}{\partial x} \Big|_{x=0} &= \frac{\partial \bar{T}_s}{\partial x} \Big|_{x=1} = \frac{\partial \bar{T}_f}{\partial x} \Big|_{x=1} = 0, \quad t \in [0, 1], \\ \bar{T}_f(x=0, t) &= \frac{T_{hot} - T_0}{1 + \exp(-200(t - 0.25))} + T_0, \quad t \in [0, 1]. \end{aligned} \quad (8)$$

The values of the constants are:

$$\begin{aligned} \alpha_f &= 0.05 & h_f &= 5 & T_{hot} &= 4 & U_f &= 1 \\ \alpha_s &= 0.08 & h_s &= 6 & T_0 &= 1 \end{aligned} \quad (9)$$

Approximate the solution of the system of PDEs (1) with a physics informed neural network (Pinns). To this end, you can either use:

1. a two-outputs neural network $(t, x) \mapsto (\bar{T}_s^\theta, \bar{T}_s^\theta)$ with tunable parameters θ , or
2. two distinct neural networks $(t, x) \mapsto \bar{T}_f^{\theta_f}$ and $(t, x) \mapsto \bar{T}_s^{\theta_s}$ with distinct sets of tunable parameters θ_s and θ_f .

The PINNs tutorial Colab can be easily modified to address the task. You can follow the steps below:

1. initialize the approximate neural network solution
2. implement the functions *add_interior_points*, *add_temporal_boundary_points*, and *add_spatial_boundary_points*;
3. implement the function *apply_initial_condition*;
4. implement the function *apply_boundary_conditions*;
5. implement the function *compute_pde_residuals*;
6. train the model.

Once the model is trained, make predictions of your model on the data stored in *Task1/TestingData.txt* and save them in *yourfirstname_yoursecondname_yourleginumber/Task1.txt*. **The format of the file has to be the same as the file Task1/SubExample.txt.**

Hint: in the function *apply_boundary_conditions* you need to implement Neumann boundary conditions at $x = 0$ for the solid and $x = 1$ for both the phases. The network derivative at $x = 0$ and $x = 1$ with respect to t and x can be computed as done in the *compute_pde_residuals* function.

Task 2: PDE-Constrained Inverse Problem

Let us now consider the non-dimensional equation governing the fluid temperature only:

$$\frac{\partial \bar{T}_f}{\partial t}(x, t) + U_f(t) \frac{\partial \bar{T}_f}{\partial x}(x, t) = \alpha_f \frac{\partial^2 \bar{T}_f}{\partial x^2} - h_f(\bar{T}_f(x, t) - \bar{T}_s(x, t)) \quad x \in [0, 1], \quad t \in [0, 8]. \quad (10)$$

Observe that compared to Task 1, the time horizon is 8. In this time frame, 2 cycles of length $T_c = 4$ are realized. Each cycle starts with the charging phase where the velocity of the fluid is $U_f = 1$, followed then by an idle phase ($U_f = 0$), a discharging phase ($U_f = -1$) and finally again an idle phase ($U_f = 0$). Each phase has length 1. The fluid velocity during the two cycle frame $U_f = U_f(t)$ is plotted in the left panel Figure 2.

In this task we aim at solving a PDE-constrained inverse problem. In particular we would like to infer the solid temperature $\bar{T}_s = \bar{T}_s(x, t)$, given noiseless measurements of the fluid temperature \bar{T}_f in the entire domain. The fluid temperature is plotted in the right panel of Figure 2.

The initial condition for the fluid temperature is:

$$\bar{T}_f(x, t = 0) = T_0, \quad x \in [0, 1] \quad (11)$$

Instead, the boundary conditions are defined below:

- **Charging State:**

$$\bar{T}_f(0, t) = T_{hot}, \quad \left. \frac{\partial \bar{T}_f(x, t)}{\partial x} \right|_{x=1} = 0, \quad t \in [0, 8] \quad (12)$$

- **Discharging State:**

$$\left. \frac{\partial \bar{T}_f(x, t)}{\partial x} \right|_{x=0} = 0, \quad \bar{T}_f(1, t) = T_{cold}, \quad t \in [0, 8] \quad (13)$$

- **Idle Phase:**

$$\left. \frac{\partial \bar{T}_f(x, t)}{\partial x} \right|_{x=0} = 0, \quad \left. \frac{\partial \bar{T}_f(x, t)}{\partial x} \right|_{x=1} = 0, \quad t \in [0, 8] \quad (14)$$

The values of the constants are:

$$\alpha_f = 0.005 \quad h_f = 5 \quad T_{hot} = 4 \quad T_{cold} = T_0 = 1 \quad (15)$$

The data measurements are stored in the file **Task2/DataSolution.txt**. The first and the second column correspond to the x and t -coordinates (first and second column, respectively) where the fluid temperature (third column) is recorded.

Provide the values of the inferred solid temperature at the same time-space coordinates, and save them in the file *yourfirstname_yoursecondname_yourleginumber/Task2.txt*. **The format of the file has to be the same as the file Task2/SubExample.txt**. Make sure the first column correspond to time t , the second to space x and the last to the solid temperature T_s .

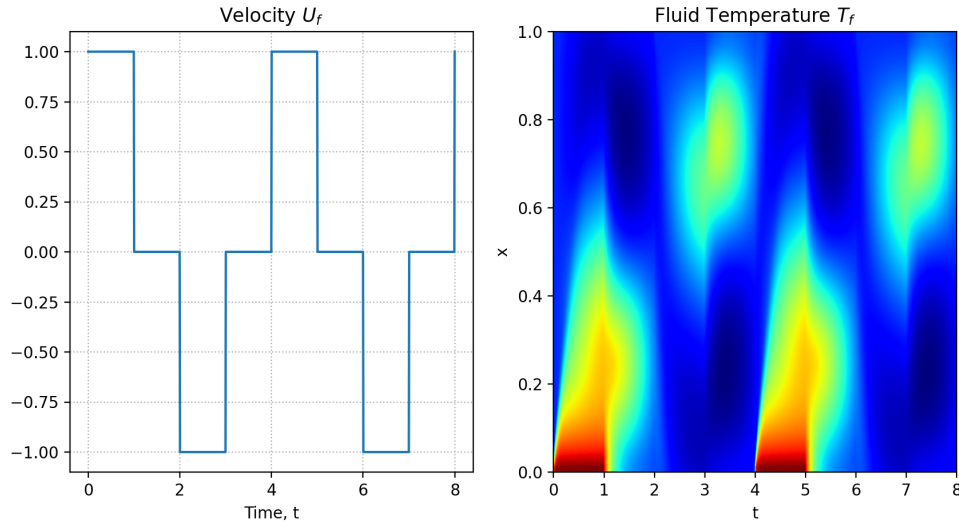


Figure 2: Task 2. Velocity snapshot U_f (left) and fluid temperature T_f measurements data (right).

Hint: there are many possible inverse algorithms which could be used. A couple of ideas include 1) using a PINN, or 2) writing a FD solver and differentiating through it to optimise for the temperature values.

Task 3: Applied Regression

Task Description

Attention: This is an open-ended task – we do not expect you to beat any particular metrics or train any pre-specified models.

The task involves conducting analysis and prediction on the California Housing from 1990. The dataset contains various features related to housing prices in California, and the goal is to build predictive models using **neural networks + PyTorch**, then compare your results with the ones presented on the reference web-page.

You should follow these steps:

1. **Data Understanding:** Review the California Housing dataset on Kaggle, focusing on its features and target variable.
2. **Model Implementation:** Implement neural network models in PyTorch for regression tasks, exploring various architectures and hyperparameters.
3. **Comparison with reference:** Evaluate model performance against results presented on the reference webpage, and draw conclusions on the effectiveness of predicting California housing prices.

Task 4 - Robustness of PINNs and Transferability (Optional):

Attention: We do not expect fully-fleshed out maths here, even though that's welcome if you feel like you can do it – we're only looking for you to be as quantitative as possible in your line of thought.

Problem setup

Consider the linear *elliptic* PDE

$$\nabla \cdot (A(x) \nabla u(x)) = \sum_{i,j} \partial_i (a_{ij}(x) \partial_j u(x)) = f(x) \text{ in } B_1. \quad (16)$$

where $A(x) := (a_{ij}(x))_{ij}$ satisfies the *ellipticity condition* $0 < \lambda \text{Id} \leq A \leq \Lambda \text{Id}$ for some $0 < \lambda \leq \Lambda < \infty$, with $a_{ij} \in C^0(B_1)$, f in $L^\infty(B_1)$ – i.e. the a_{ij} are continuous and f is essentially bounded in the n -dimensional unit ball.

The following version of *Schauder estimates* holds true for any solution $u \in C^2(B_1)$ of (16)

$$\|u\|_{C^1(B_{1/2})} \leq C_\epsilon (\|u\|_{L^\infty(B_1)} + \|f\|_{L^\infty(B_1)}) \quad (17)$$

with C_ϵ being a constant depending only on $n, \epsilon > 0, \lambda, \Lambda$ and (a_{ij}) .

Let $u, u_\delta \in C^2(B^1)$ be solutions of $\nabla \cdot (A \nabla u) = f$, respectively $\nabla \cdot (A \nabla u_\delta) = f_\delta$, where $f_\delta := f + \delta \cdot \varphi$ and $\varphi \leq 1$ is a smooth, compactly supported function in B_1 – so f_δ is just a perturbation of f .

Questions

Assume you have access to trained PINN u_θ with $\|u_\theta - u\|_{C^1(B_1)} \leq \epsilon$ for some $\epsilon > 0$:

- Establish some bound on $\|u_\theta - u_\delta\|_{C^1(B_{1/2})}$ (**Hint:** consider the linearity of the differential operator, the PDE satisfied by the difference of two solutions, and the Schauder estimate).
- Qualitatively discuss the robustness of PINNs solutions to perturbations in the source terms / initial data, and suggest some transfer learning strategies.
- How does the differential operator affect robustness? Why is it useful to control the source terms / initial data / solution in higher-order Sobolev spaces?