



 Kongrit Polishing System Pvt Ltd

 No.5, Jayam Industrial Estate,
Chettyar Agaram 1st Street,
Opp to Ishwarya Apartments,
Vanagaram, Chennai - 600095

 +91 73388 82034, 94885 50706


 info@kongrit.in

 www.kongrit.in



KONGRIT
POLISHING SYSTEM

GRINDING TOOLS
POLISHING TOOLS
POLISHING SYSTEMS

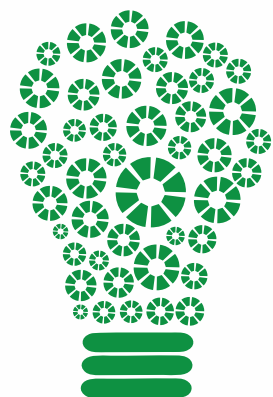

ABOUT KONGRIT POLISHING SYSTEM

Kongrit Polishing system is a joint venture company between Kleanmax, Concrete Polishing Tools Company and EM&TS, Industrial Flooring Consultants.

Kleanmax was founded in 2012 primarily as a traditional floor polishing tools manufacturing for Mosaic, Marble & Granite Flooring Industry. We ventured into concrete floor polishing tools making with our vast experience in polishing backed by our R&D. We are positioned to supply and distribute our material in all over India along with technical support.

The idea is to provide optimised concrete polishing system for Industrial Concrete Flooring such as Factories, Warehouse and Commercial Buildings. We offer Ride On Trowel - Wet Polishing Systems, Which is faster and Economical compare to traditional polishing systems.

We offer polishing systems in three category

1. Matt Finishing
2. Semi Glossy
3. Full Glossy

VISION

- To provide an economical and faster Polishing system for Industrial concrete Floor



KONGRIT POLISHING SYSTEM

Kongrit products are the result of over 11 years of research and development in abrasive products. This revolutionary technology allows users to achieve an outstanding concrete finish in fewer steps - and therefore at a lower cost - than with traditional finishing methods.

- Make in INDIA
- Produced by a team that is dedicated to prompt, accurate customer service
- Consistent, high-quality products
- On-time, error-free shipments
- Prompt, accurate information and answers

Kongrit concrete grinding & polishing tools are made from a high-quality hard resin bond and qualified diamonds. They deliver excellent result and has a high shine, long life & low cost. It can even be used for both dry and wet polishing.





KIA MOTORS INDIA PVT LTD, ANDHRA PRADESH



KONGRIT
POLISHING SYSTEM

GRINDING TOOLS
POLISHING TOOLS
POLISHING SYSTEMS



POLISHED CONCRETE

Polished Concrete is a multi-step mechanical grinding & polishing process that utilizes industrial Heavy-duty machines equipped with diamond segmented abrasives are used to grind down concrete surfaces to the desired degree of shine and smoothness.

POLISHED CONCRETE METHOD

Dry Polishing requires no water, instead contractor use machines equipped with dust containment systems that eliminate virtually all of the mess. Typically, dry polishing is used for the initial grinding steps, when more concrete is being removed.

Wet polishing uses water to cool the diamond abrasives and eliminate grinding dust. Because the water reduces friction and acts as a lubricant, it increases the life of the polishing abrasives.

ADVANTAGE :

Elimination of Dusting : Due to free lime - Reduces the porosity of the floor in conjunction with densifier.

Better Lighting : Reflectivity of the floor - Can reduce lighting costs.

Slip Resistance : Higher degree of polish is not directly related to slip resistance - Polished may look as smooth as glass, but they are completely safe to walk.

Less Maintenance : Reduced penetration of contaminants, remain on surface - No sealing, waxing or stripping of floor required - No aggressive scrubbing required.

Reduced Tire Wear : Smoother concrete surface can significantly reduce tire wear.

Cost Effective : Low maintenance costs - No replacement costs as with specialty flooring systems - Minimal maintenance required to preserve the appearance of the floor.

- | | |
|----------------------------|-------------------|
| 1.Affordable | 5.Dust Free |
| 2.Durable | 6.Low Maintenance |
| 3.Lasting | 7.Non-Slip |
| 4.Environmentally Friendly | 8.Reflective |

Applications : Warehouses, Logistics Parks, Industrial Factory Buildings, Commercial Buildings like shopping malls & Offices, Museum, Conventional Centres.



PEEKAY STEELS CASTINGS PVT LTD,
HINDUPUR, ANDHRA PRADESH



KONGRIT
POLISHING SYSTEM

GRINDING TOOLS
POLISHING TOOLS
POLISHING SYSTEMS



DENSIFICATION

Silicate technology – Hydration of concrete produces calcium hydroxide (free lime) – Chemically converts the free lime to calcium silicate hydrate (CSH) producing a dense surface. The densifier will impregnate into the surface, penetrating and reacting with free lime within the concrete substrate. The chemical reaction produces a denser concrete surface, which reduces abrasion wear and bind dust particles.

PROCEDURES :

IDENTIFY THE CONDITION OF THE FLOOR

First Clean the surface by using Scrubber then evaluate the condition of the surface for Tool selections. Concrete must be a minimum of 28 days old, Minimum compressive strength of concrete should be 3,500 psi (24 MPa)

SURFACE PREPARATION


The grinding procedure will eliminate the micro-roughness of the concrete floor opening the pores of the surface. This is generally a three-to four step process, depending on the condition of the concrete.

After a few passes over the surface with the grit, repeat the process with the finer grit Each diamond grit cure for 24 to 48 hours. step requires an average of two passes, depending on the density of the concrete. If the floor is in relatively good condition (clean and level), We start the polishing process after densified. Remove the slurry by using Scrubber Dryer.


DENSIFY THE CONCRETE

After performing initial coarse grinding with the diamond abrasives, it's often beneficial to apply a liquid chemical hardener to the concrete to help solidify and densify the surface and provide extra protection from water penetration and staining.


CONCRETE POLISHING SYSTEMS

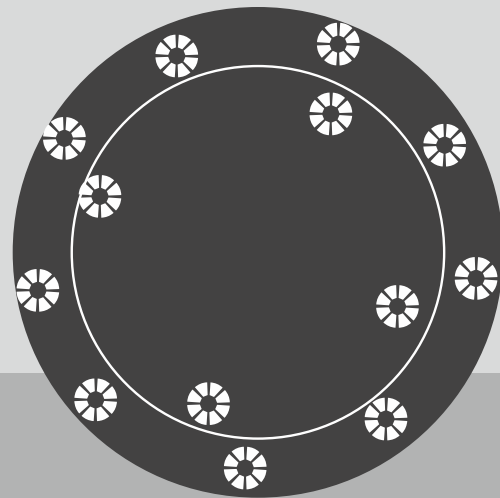

For 120cm

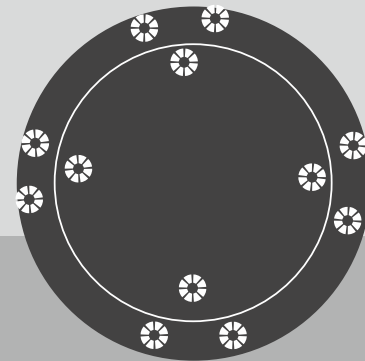


For 90cm

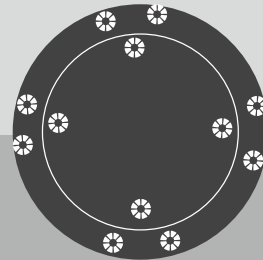

For 60cm

The system is specially designed for concrete flooring professionals and for industrial use. The system utilizes conventional power trowels and the discs are easily attached, removed and replaced. Place the clip holder, make a small cut in the specially designed pad and pull the clip of the disc through the clip holder. The pad and both parts of the disc are now fixed together. Attach the pad to the floating pan with the velcro attachment- system and place it underneath the power trowel and you are ready to begin the process.

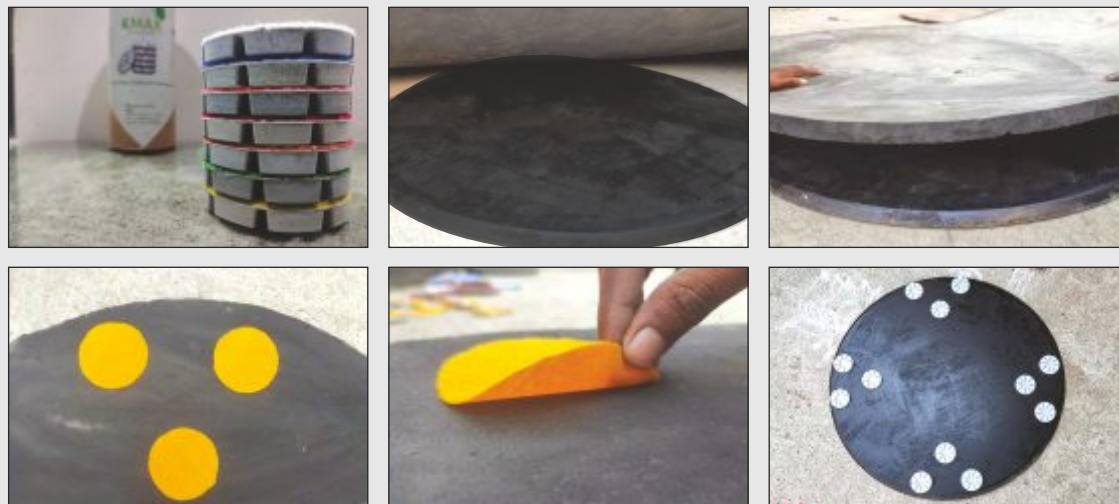

BENEFITS FOR APPLICATORS

- Power trowel application
- Fast & easy installation (1000+m2 a day)
- Increase profit-margins
- Cost-effective solution

SYSTEM OPTIONS

Soft Concrete M25 + 4 kgs Hardener
Medium Concrete M30 + 4 kgs Hardener
Hard Concrete M35 + 4 Kgs Hardener

Matt Finishing : G200 / G400, D, G400 / G800
Satin Finish that will reflect images from side Lights



Prepare Power Trowel / Ride On Trowel with G200, Sprinkle water and start the grinding process, Two passes in each directions. Check the floor surface and the Slurry which is generated. If slurry is thick, add more water. Remove the slurry completely then clean with water before start next step of grinding. Use Only Scrubber Dryer for clean the concrete Surface for better results. Make sure the Concrete floor surface completely clean without any dirt, apply densifier based on Manufacturers recommended dosage. Allow the chemical to penetrate without any disturbance.




Semi Glossy : G100, G200, D, G400, G800
Semi Glossy Finish that will reflect overhead and Side Images from 35-45 feet with increased Light Reflectivity.



Prepare Power Trowel / Ride On Trowel with G100, Sprinkle water and start the grinding process, Two passes in each directions. Check the floor surface and the Slurry which is generated. If slurry is thick, add more water. Remove the slurry completely then clean with water before start next step of grinding. Use Only Scrubber Dryer for clean the concrete Surface for better results. Prepare Power Trowel / Ride On Trowel with G200. Make sure the floor surface completely clean then apply water and start the next grinding step. Do the same Cleaning process again before starting next process. Start Polishing with G400 & G800, Two passes in each direction then clean.



Full Glossy : G50, G100, G200, D, G400, G800, G1500, S & G3000
High Glossy Finish that will Look Wet and Show Mirror Like Reflections of Side

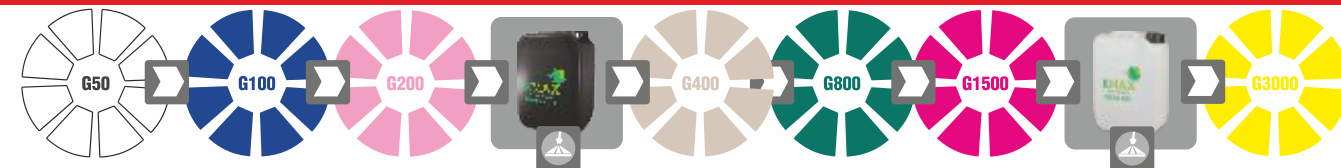

Prepare Power Trowel / Ride On Trowel with G100, Sprinkle water and start the grinding process, Two passes in each directions. Clean & check the floor surface then grind with G200. Make sure the Concrete floor surface completely clean without any dirt, apply densifier based on Manufacturers recommended dosage. Allow the chemical to penetrate without any disturbance. Start Polishing with G400, G800, G1500 then Clean the floor surface apply Sealer coat and start final polishing with G3000.





PEEKAY STEELS CASTINGS PVT LTD,
HINDUPUR, ANDHRA PRADESH



KONGRIT
POLISHING SYSTEM

GRINDING TOOLS
POLISHING TOOLS
POLISHING SYSTEMS



DENSIFIER

Lithium silicate is a chemical compound used on concrete surfaces to enhance durability, strength, and longevity. When applied to the floor, it penetrates the surface and reacts with free lime particles (through alkali-silica reaction) to help protect the concrete from damage.

KONGRIT densifier and chemical hardener compound is a proprietary, water-based, ready-to-use, clear silicate liquid, formulated with chemically reactive raw materials to harden and dustproof concrete.



PROTECTING SEALER

Sealers are a film-forming topical application usually made up of acrylics, epoxies, urethanes, and waxes. Sealers can chip or peel off over time and will usually need to be re-applied.

Depending on your floor goals, requirements, and your Industry, We will recommend the best type of sealer for your project. Softer, more porous concrete may require multiple additional coats of sealer.



BURNISHING

The burnished concrete process involves utilizing a high-speed burnisher that spins at approximately 1,500 rpm to 2,500 rpm to fill the concrete's pores with an applied chemical. The burnishing machinery heats and buffs the topical coating into a concrete surface.

KONGRIT ACCESSORIES

EDGE GRINDING MACHINE

Edge Grinder is equipment to grind all around the columns, Walls and Machine Foundation edges. It's a walk behind machine and having a small grinding head, so it can reach the edges.



KONGRIT ACCESSORIES

FLOOR WIPER

Heavy duty floor wipers are used to clean slurry. Its sharp rubber blade creates a tight grip on the surface that helps to easily move liquid and leave a dry surface.



RIDE ON SCRUBBER DRYER

Scrubber dryer is a cleaning machine that can be used to efficiently and effectively clean floors, replacing traditional mops and buckets. They work to apply cleaning solution and aggressively scrub and dry surfaces in one pass.



SPRAYER

Chemical sprayers help you evenly disperse your necessary yard chemicals so you're not coming into direct skin-to-skin contact with these harmful substances.



AUTO SCRUBBER DRYER

These machines, also called pedestrian scrubber-dryers, are operated by the user who stands behind the unit and holds the handle to guide the scrubbing machine while walking along behind it. There are walk behind floor scrubbers with and without traction.



MICROFIBER MOP

The wet microfiber mop is used to apply densifier or sealer on the concrete floor surface. A microfiber pad has the same surface area as a cotton cloth four times as large, it absorbs the liquids and help to apply evenly on the surface of the floor.



VACUUM CLEANER

Vacuum Cleaner Machine is a device that causes suction in order to remove slurry from Concrete floors. This is walk behind machine which is having a suction head and hose which is connected to container for save the slurry.



BURNISHING MACHINE

A burnisher is a high-speed machine that spins at 1500-2000 RPMs. These units are used for polishing your hard floors. Due to the faster rotations, the burnisher creates friction on your floor, which in turn produces the highly desirable "wet look" shine.





KIA MOTORS INDIA PVT LTD, ANDHRA PRADESH



KONGRIT
POLISHING SYSTEM

GRINDING TOOLS
POLISHING TOOLS
POLISHING SYSTEMS



OUR CLIENTS

